
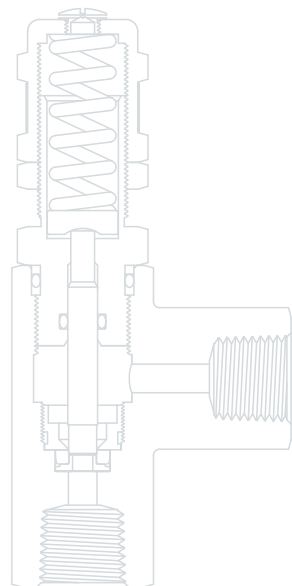
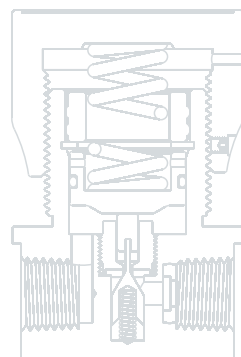


FITOK

Full Technical Catalog
For Specialty Gas Application

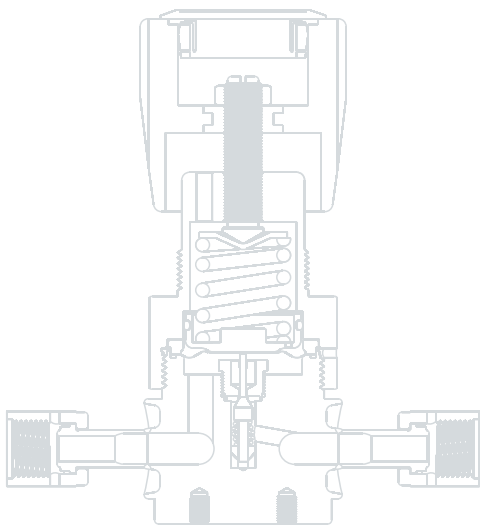

FITOK Full Technical Catalog
For Specialty Gas Application

Regulators and Back Pressure Regulators



Point-of-Use Panels



Changeover Systems



Purge Assemblies



Diaphragm Valves



Ball Valves



Needle Valves



Check Valves



Relief Valves



Filters



Fittings



Cylinder Connections



A

Gas Control Equipment

B

Related Products

C

Technical References

Contents

A

Gas Control Equipment

General Introduction A-03

Basic Knowledge of Regulators A-03

Basic Knowledge of Back Pressure Regulators A-07

Products Range A-09

Typical Application A-10

Product Selection Guide A-11

User's Guide A-12

Regulators

General Diaphragm Regulators
RDGC Series A-15

Dual-stage Diaphragm Regulators
RDDC Series A-21

Sensitive Diaphragm Regulators
RDSC Series A-27

Medium Flow Diaphragm Regulators
RDGH Series A-33

High Flow Diaphragm Regulators
RDGN Series A-39

Steam Heated Regulators
RDVC Series A-45

General Piston Regulators
RPGC Series A-50

Compact Piston Regulators
RPCC Series A-56

High Pressure Piston Regulators
RPGX Series A-61

High Flow Piston Regulators
RPGN Series A-67

Back Pressure Regulators

General Diaphragm Back Pressure Regulators
BDGC Series

A-75

General Piston Back Pressure Regulators
BPGC Series

A-80

High Pressure Piston Back Pressure Regulators
BPGX Series

A-85

Pressure Control Panels

Pressure Control Panels
FSR-1 Series

A-92

FSR-2 Series

A-96

Changeover Systems

Manual Changeover System
FDR-1 Series

A-101

FDR-2 Series

A-104

Automatic Changeover System
CEPR Series

A-107

FDR-1L Series

A-111

DPPR Series

A-115

FDR-1T Series

A-119

Point-of-Use Panels

General Point-of-use Panels
FPR-1 Series

A-125

Sensitive Point-of-use Panels
FPR-1S Series

A-128

B

Related Products

Purge Assemblies
FPV-1 Series

B-03

High Pressure Compact Diaphragm Valves
DS Series

B-05

One-Piece Instrumentation Ball Valves
BO Series

B-06

Nonrotating-Stem Needle Valves ND and NDH Series	B-08
Check Valves CV, CO and COA Series	B-10
Relief Valves RUV and RV Series	B-13
Tee-Type Filters FT Series	B-15
bypass Filters FB Series	B-17
In-Line Filters FI Series	B-19
All-Welded In-Line Filters FW Series	B-21
High-Capacity Filters FH Series	B-22
Tube Fittings 6D Series	B-24
Metal Flexible Hoses MH and MM Series	B-27
Cylinder Connections CGA DISS Series	B-31
CGA Series	B-35
DIN Series	B-42
Gas Connection Assignment Table	B-43

C Technical References

Common Terms and Definitions	C-02
Gas Purity Values	C-03
How to Use the FITOK Flow Charts	C-04
Conversion Factors	C-05
Material Compatibility for Gases	C-06
Ordering Details for Specialty Gas Application	C-08

A

Gas Control Equipment



FITOK

Contents

General Introduction	A-03
Basic Knowledge of Regulators	A-03
Basic Knowledge of Back Pressure Regulators	A-07
Products Range	A-09
Typical Application	A-10
Product Selection Guide	A-11
User's Guide	A-12
 Regulators	
General Diaphragm Regulators RDGC Series	A-15
Dual-stage Diaphragm Regulators RDDC Series	A-21
Sensitive Diaphragm Regulators RDSC Series	A-27
Medium Flow Diaphragm Regulators RDGH Series	A-33
High Flow Diaphragm Regulators RDGN Series	A-39
Steam Heated Regulators RDVC Series	A-45
General Piston Regulators RPGC Series	A-50
Compact Piston Regulators RPCC Series	A-56
High Pressure Piston Regulators RPGX Series	A-61
High Flow Piston Regulators RPGN Series	A-67

Back Pressure Regulators

General Diaphragm Back Pressure Regulators
BDGC Series

A-75

General Piston Back Pressure Regulators
BPGC Series

A-80

High Pressure Piston Back Pressure Regulators
BPGX Series

A-85

Pressure Control Panels

Pressure Control Panels
FSR-1 Series

A-92

FSR-2 Series

A-96

Changeover Systems

Manual Changeover System
FDR-1 Series

A-101

FDR-2 Series

A-104

Automatic Changeover System
CEPR Series

A-107

FDR-1L Series

A-111

DPPR Series

A-115

FDR-1T Series

A-119

Point-of-Use Panels

General Point-of-use Panels
FPR-1 Series

A-125

Sensitive Point-of-use Panels
FPR-1S Series

A-128


General Introduction

Basic Knowledge of Regulators

A pressure reducing regulator is positioned where the high pressure of a medium needs to be reduced and maintained to a lower and stable level. By turning the adjustment handle, the tension of range spring would be changed so as to control the outlet pressure of the regulator.

Diaphragm Regulators

Major Materials of Construction

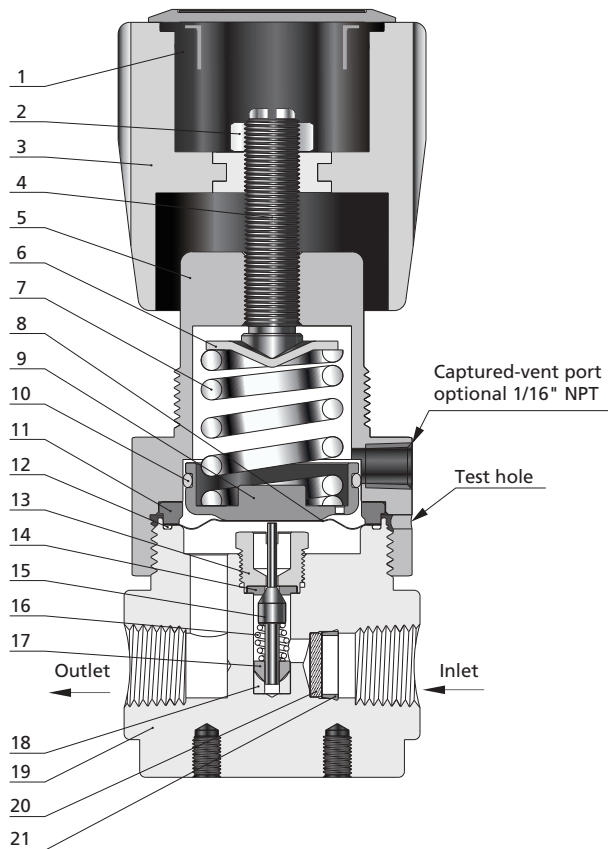

Item	Component	Material/Specification
1	Hole Plug	ABS
2	Nut	Brass
3	Knob Handle	ABS
4	Range Screw	304 SS/ASTM A479 or Brass
5	Bonnet	304 SS/ASTM A479 or Brass
6	Spring Button	304 SS/ASTM A276
7	Range Spring	Alloy
8	Diaphragm	Hastelloy
9	Spring Plate	Aluminium alloy
10	O-ring	Buna-N
11	Gland	304 SS/ASTM A479
12	Seal Ring	PTFE/ASTM D1710
13	Seat Retainer	316L SS/ASTM A276
14	Seat	PCTFE/ASTM D1430
15	Lift Poppet	N10276/ASTM B574
16	Poppet Spring	Alloy X-750
17	Poppet Damper	PTFE/ASTM D1710
18	Friction Sleeve	316L SS/ASTM A479
19	Body	316L SS/ASTM A479 or 316 SS/ASTM A479 or Brass
20	Filter	316L SS
21	Retaining Ring	PTFE/ASTM D1710


Features

- ⦿ Metal diaphragm pressure sensing mechanism ensures excellent sensitivity and set point pressure stability. Piston sensing mechanism (shown on the next page) capable of withstanding higher pressures
- ⦿ The valve stem is designed with fine threads, allowing for precise adjustment of outlet pressure with low torque
- ⦿ Poppet damper keeps the poppet positioned accurately and reduces vibration
- ⦿ The regulator seat is easily damaged by contaminants in the system. 40 μ m filter is installed at the inlet to protect the regulator. RDGH, RDGN, and RPGN series are not fitted with filter, if there are particles in the media, a filter should be installed upstream
- ⦿ RDSC, RDGH, and RDGN series diaphragm regulators are fitted with a captured-vent port through which the media can be discharged to a designated location in the event of an accidental rupture of the regulator diaphragm

Working Principle

A pressure regulator functions by reducing high pressure media to a lower pressure. It operates by maintaining a dynamic equilibrium of forces, including the downward force on the diaphragm exerted by the range spring -- loading force (F_s), the force from the poppet spring (F_p), the inlet pressure force (F_i), and the outlet pressure force (F_o). These forces establish a balance, expressed as $F_s = F_p + F_i + F_o$. When one force changes, the other forces must adjust to reestablish balance.

When the outlet pressure (F_o) falls below the set pressure, the excess downward force pushes the poppet away from the seat, allowing more high-pressure gas to enter the chamber, thereby increasing the outlet pressure. When the outlet pressure (F_o) exceeds the set pressure, the excess upward force lifts the poppet back onto the seat, restricting the flow of high-pressure gas into the chamber and thereby reducing the outlet pressure.

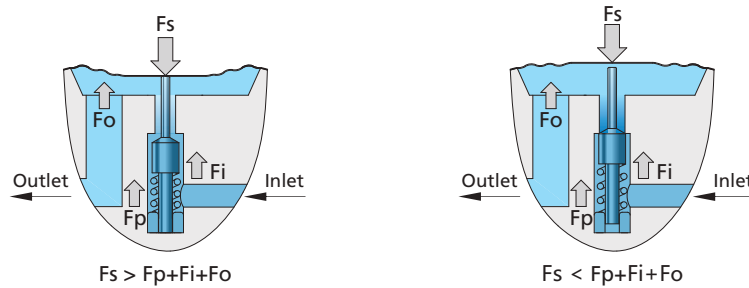


Piston Regulators

A piston regulator has the same working principle as a diaphragm regulator. The key distinction is that the diaphragm is changed to a piston to satisfy the needs for high pressure applications. Piston sensing mechanisms typically are used to regulate higher pressures than a diaphragm can withstand. They are also more resistant to damage caused by pressure spikes and have a short stroke to maximize cycle life.

Major Materials of Construction

Item	Component	Material/Specification
1	Circlips for Bores	Stainless Steel
2	Retaining Ring	PTFE/ASTM D1710
3	O-ring	FKM or FFKM
4	Piston	316L SS/ASTM A479

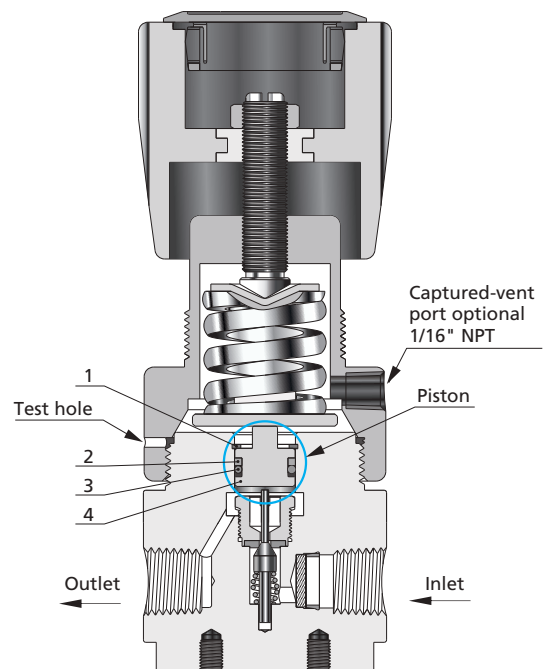

Features

- ⦿ The piston sensing mechanism can withstand higher pressures, so piston regulators have a larger outlet pressure control range
- ⦿ RPGC series piston regulators are fitted with a captured-vent port, through which the media can be discharged to a designated location in the event of accidental failure of the piston seal of the regulators
- ⦿ Piston regulators, except for RPCC series, are available with optional self-venting to allow excessive outlet pressure to be discharged


Self Venting

When turning the handle counterclockwise (to DECREASE pressure), the outlet pressure in a contained system can be fully released through the self-venting mechanism, eliminating the need for an additional purge valve or bleed valve.

Principle: The valve incorporates a structure that is isolated from the atmosphere. During normal operation of the pressure regulator (INCREASE), the piston is pushed upward by the loading force from the range spring, causing the vent seat to contact the vent rod and form a seal. In this sealed state, the outlet pressure is not vented through the vent seat. When the handle is turned counterclockwise (DECREASE), the loading force from the range spring is reduced. At this point, the force exerted on the piston by the outlet pressure exceeds the loading force, causing the piston to move upward. As the piston rises, the vent rod gradually detaches from the vent seat due to its limit structure, allowing the outlet pressure to vent to the atmosphere until it reaches the new set point.

Cautions:

1. Avoid using self-venting regulators with flammable, combustible, toxic, hazardous, or corrosive media, as the self-venting process releases excess outlet pressure directly into the atmosphere. It is also not recommended for use with non-hazardous high-purity media, as self-venting may introduce atmospheric impurities into the system.
2. In certain designs, excess outlet pressure that would be vented through self-venting can be vented to a designated safe area through a captured vent port. For such requirements, please contact FITOK or our authorized distributors.
3. Since the self-venting configuration features an additional seal, considerations should be given to material compatibility, such as the seat material at the seal. Please refer to the FITOK Material Compatibility Guide on page C-05.

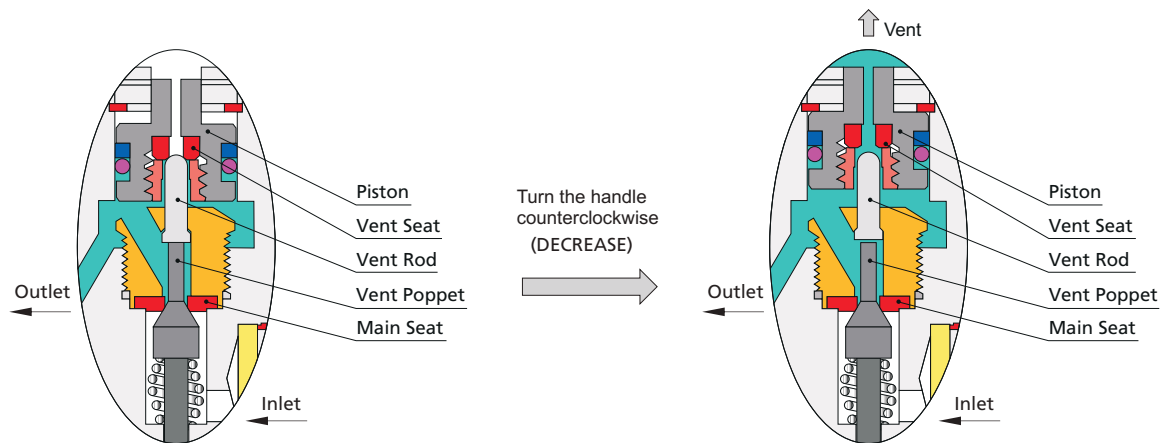



RPGC Series Self-Venting Mechanism Diagram (Media Shown in Cyan)

Note: View the corresponding animated illustration on FITOK's official website.

Dual-Stage Diaphragm Regulators

When the inlet pressure (P_i) decreases, the outlet pressure (P_o) shall increase. Even though the increase may not be significant, the dual-stage regulator would be a better option when more stable pressure is required, and the upstream pressure fluctuates violently.

The function of a dual-stage regulator is similar to that of two single-stage regulators in series. The 1st-stage regulator reduces the inlet pressure to an intermediate level for the 2nd-stage regulator to adjust to a constant output, which at the most extent ensures the stability of the outlet pressure.

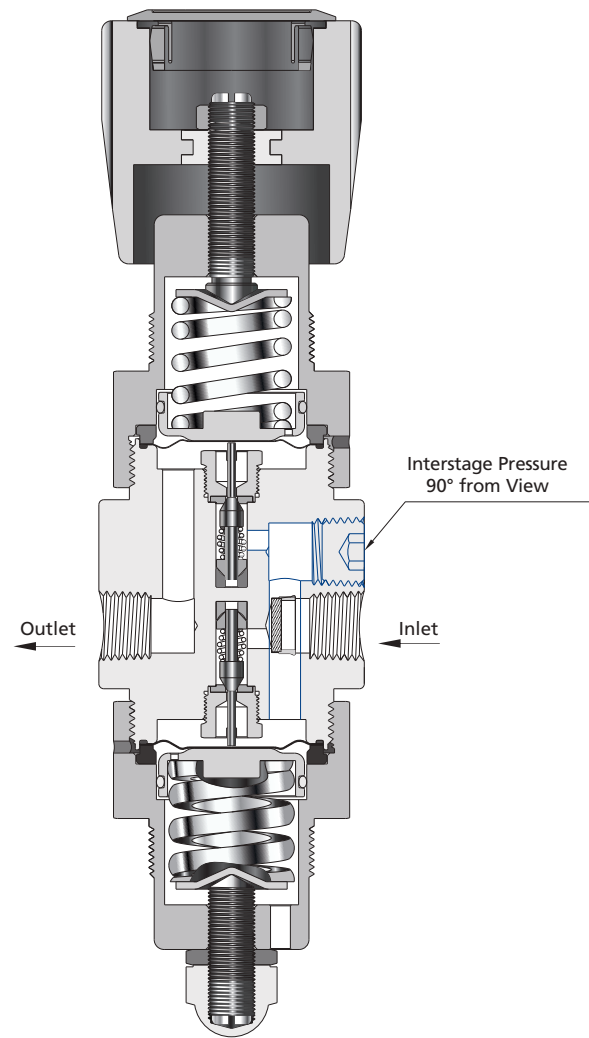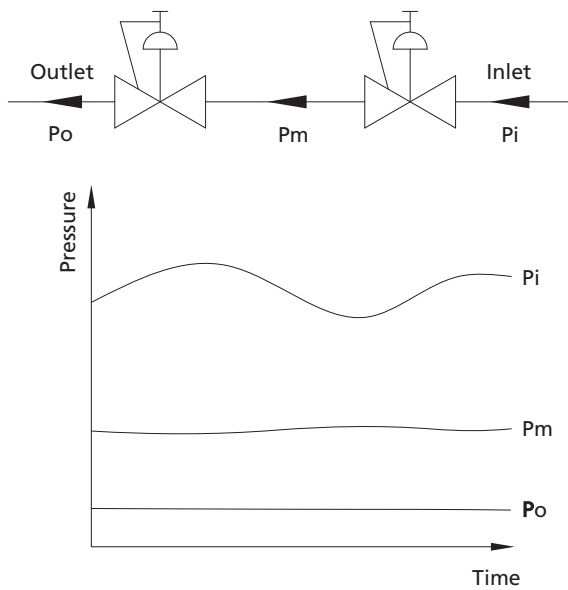


Basic Knowledge of Back Pressure Regulators

Back pressure regulators control inlet pressure by balancing an adjustable spring force against the force of the inlet pressure. The spring force is adjusted by turning the handle/stem, which sets the desired inlet pressure.

Back Pressure Diaphragm Regulators

Major Materials of Construction

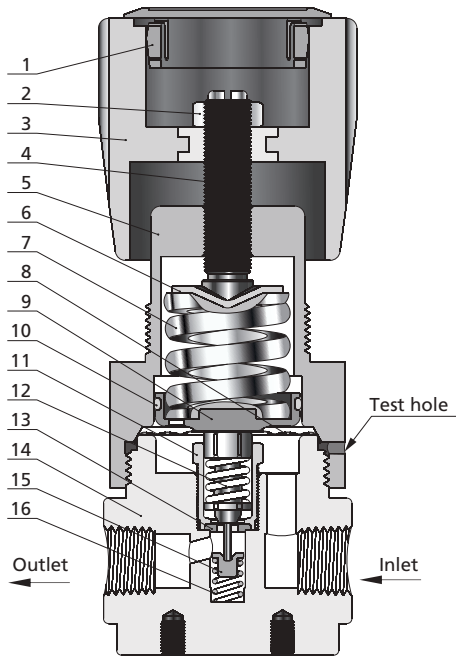

Item	Component	Material/Specification
1	Hole Plug	ABS
2	Nut	C36000/ASTM B16
3	Knob Handle	ABS
4	Range Screw	304 SS/ASTM A479 or Brass
5	Bonnet	304 SS/ASTM A479 or Brass
6	Spring Button	304 SS/ASTM A240
7	Range Spring	Alloy
8	Diaphragm	316L SS
9	Spring Plate	Aluminium alloy
10	O-ring	NBR
11	Seat Retainer	316L SS/ASTM A479
12	Lift Poppet	316L SS/ASTM A479
13	Seat	PCTFE/ASTM D1430
14	Body	316L SS/ASTM A479 or 316 SS/ASTM A479 or Brass
15	Friction Sleeve	316L SS/ASTM A479
16	Poppet Spring	316L SS/ASTM A313

Features


- Metal diaphragm pressure sensing mechanism to ensure excellent sensitivity and stable set point pressures
- Stem designed with fine-pitch threads to enable precise spring adjustment with low torque
- Metal-to-metal diaphragm seal minimizes the potential for leakage

Working Principle

A back pressure regulator operates on a principle similar to that of a pressure regulator. It maintains a dynamic equilibrium of forces, including the downward force on the diaphragm exerted by the range spring--loading force (F_s), the force from the poppet spring (F_p), the inlet pressure force (F_i), and the outlet pressure force (F_o). These forces establish a balance, expressed as $F_s = F_p + F_i + F_o$. When one force changes, the other forces must adjust to reestablish balance.

When the loading force (F_s) becomes lower than the combined force of the poppet spring(F_p), inlet pressure (F_i), and outlet pressure (F_o), the poppet lifts away from the seat seal, opening the path and thereby reducing the inlet pressure, where the control pressure upstream of the back pressure regulator decreases.

When the loading force (F_s) becomes higher than the combined force of the poppet spring(F_p), inlet pressure (F_i), and outlet pressure (F_o), the poppet presses against the seat seal, closing the path and thereby increasing the inlet pressure, where the control pressure upstream of the back pressure regulator rises.

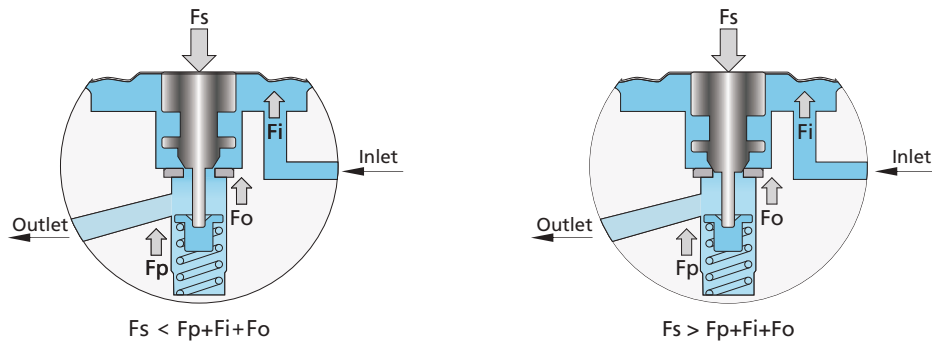


Back Pressure Piston Regulators

A piston regulator has the same working principle as a diaphragm regulator. The key distinction is that the diaphragm is changed to a piston to satisfy the needs for high pressure applications. Piston sensing mechanisms typically are used to regulate higher pressures than a diaphragm can withstand. They are also more resistant to damage caused by pressure spikes and have a short stroke to maximize cycle life.

Major Materials of Construction

Item	Component	Material/Specification
1	Body	316L SS/ASTM A479 or Brass
2	Seat	PCTFE/ASTM D1430
3	Seat Gasket	316L SS/ASTM A479
4	Seat Retainer	316L SS/ASTM A479
5	Lift Poppet	316L SS/ASTM A479
6	Piston Nut	316L SS/ASTM A479
7	O-ring	NBR or FKM or FFKM
8	Piston	316L SS/ASTM A479
9	Circlips for Bores	304 SS/GB 893.126
10	Poppet Spring	316L SS
11	Spring Plate	Brass
12	Range Spring	Alloy
13	Spring Button	304 SS/ASTM A479
14	Bonnet	304 SS/ASTM A479 or Brass
15	Range Screw	Brass
16	Nut	Brass
17	Knob Handle	ABS
18	Hole Plug	ABS
19	Label	PVC

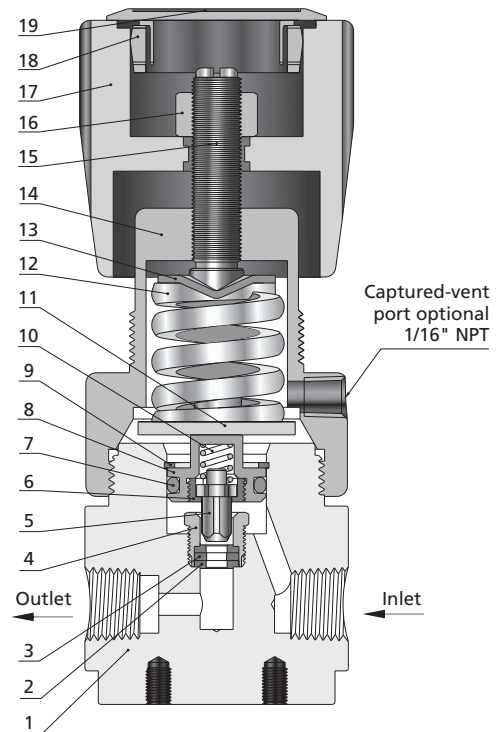

Features

- ◎ Piston sensing mechanism can withstand higher pressures, so piston back pressure regulators have a larger inlet pressure adjustment range
- ◎ Stem designed with fine-pitch threads enables precise spring adjustment with low torque
- ◎ BPGC series piston back pressure regulators are equipped with capture-venting holes. When the piston seal of the back pressure regulator fails accidentally, the media can be released to a designated location through the Captured-vent port

Products Range

Regulators

Regulators are typically used to reduce the high pressure in pipelines to a desired lower pressure.

Back Pressure Regulators

Back pressure regulators are used to control system back pressure and are typically used in analytical and metering systems.

Pressure Control Panels

The pressure control panels consist of a cylinder pressure regulator (RDGC or RPGC series) and a three-way diaphragm valve with cut-off, pressure reducing and vent functions. They are typically installed in gas storage areas to depressurize high pressure media from cylinders or tanks to a desired lower pressure.

Changeover Systems

The changeover system switches between the two gas sources and selects one of them to supply gas to ensure the continuity of gas consumption.

There are manual changeover system and automatic changeover system.


Manual changeover system, when a gas source is exhausted, you need to manually switch to another gas supply.

Automatic changeover system, when a gas source is exhausted, the system automatically switches to another gas supply.

Point-of-Use Panels

The point-of-use panels consist of a line pressure regulator (RDGC series or RDSC series) and a diaphragm valve with cut-off and pressure reducing functions. They are typically installed in a gas point to precisely adjust the system to a desired pressure.

Typical Application

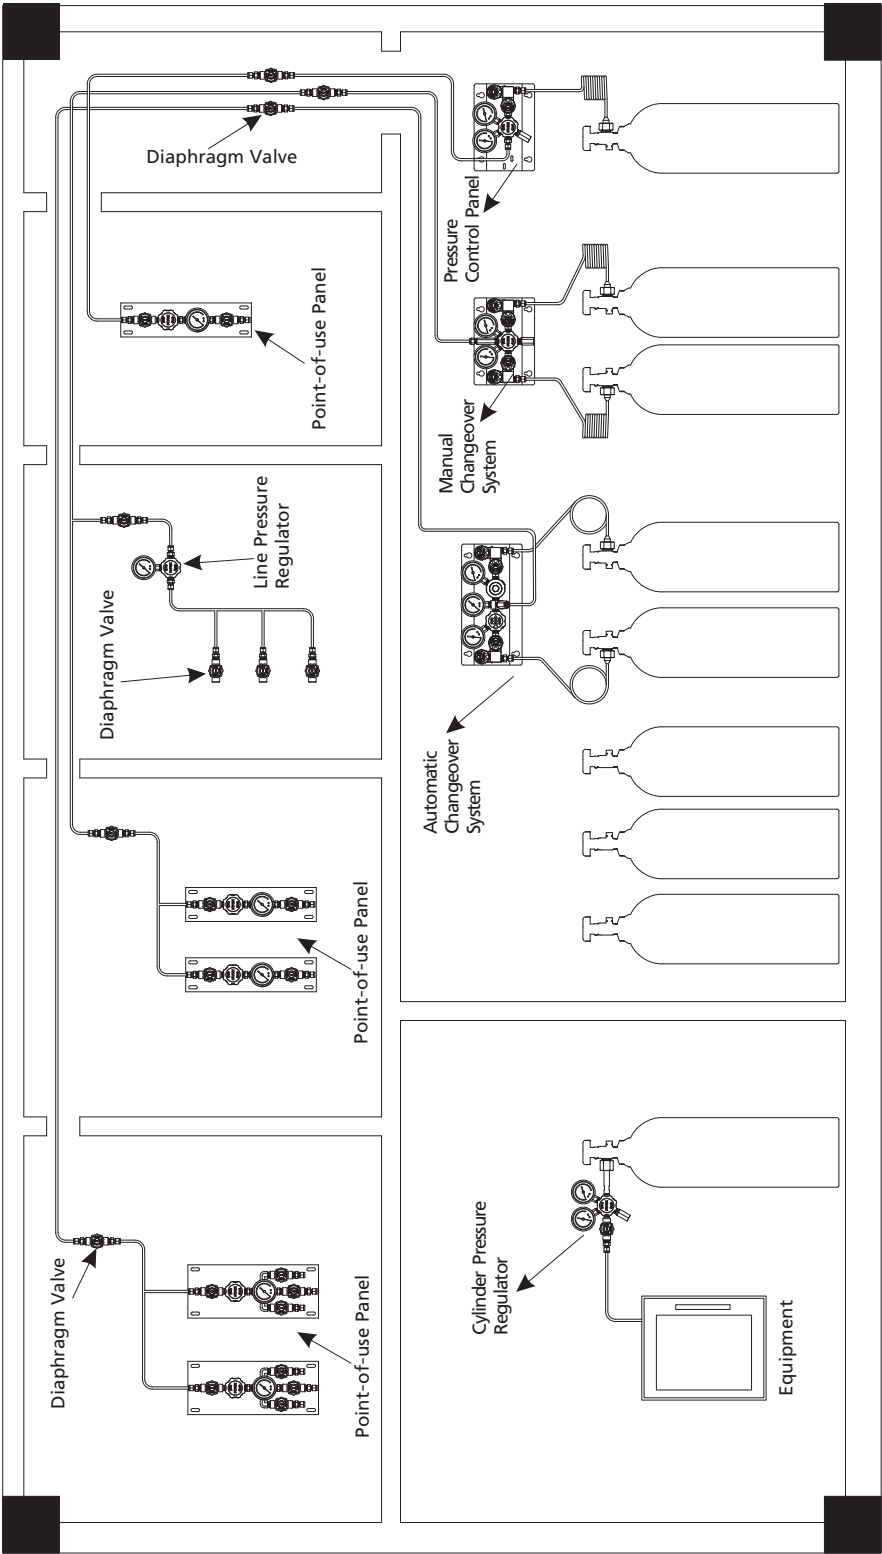

Product Selection Guide

Select diaphragm regulators when the outlet pressure < 500 psig.

Select piston regulators when the outlet pressure ≥ 500 psig.

Dual-stage diaphragm regulators are recommended when the inlet pressure fluctuates frequently but no outlet pressure variation is desired.

Type	Series	Sensing Mechanism	Maximum Inlet Pressure psig	Outlet Pressure Range psig	Captured Vent Port	Flow Rate Cv
General Diaphragm Regulators	RDGC	Diaphragm	4500	0~500	Yes	0.2 (Inlet pressure 500, 1500) 0.09 (Inlet pressure 3500, 4500)
General Tied-Diaphragm Regulators	RTGC	Diaphragm	3500	0~150	Yes	0.06 (Inlet pressure 3500) 0.15 (Inlet pressure 600, 1000)
Miniature Diaphragm Regulators	RDCC	Diaphragm	150	0~100	No	0.08
Miniature Tied Diaphragm Regulators	RTCC	Diaphragm	150	0~100	No	0.08
Two-Stage Diaphragm Regulators	RDDC	Diaphragm	4500	0~250	Yes	0.06
Sensitive Diaphragm Regulators	RDSC	Diaphragm	4500	0~200	Yes	0.06
Medium Flow Diaphragm Regulators	RDGH	Diaphragm	3000	0~200	Yes	1.0
High Flow Diaphragm Regulators	RDGN	Diaphragm	500	0~150	Yes	1.8
Steam Heated Regulators	RDVC	Diaphragm	3600	0~500	No	0.06
General Piston Regulators	RPGC	Piston	6000	0~2500	Yes	0.06 0.1 (Vent)
Compact Piston Regulators	RPCC	Piston	6000	0~1800	No	0.06
High Pressure Piston Regulators	RPGX	Piston	10000	10~10000	No	0.06
High Flow Piston Regulators	RPGN	Piston	4500	0~1500	No	2.0
Back Pressure Regulators	BDGC	Diaphragm	250	0~250	No	0.3
	BPGC	Piston	1000	10~1000	Yes	0.3
	BPGX	Piston	10000	5~10000	No	0.25
Pressure Control Panels ^①	FSR-1	Diaphragm	4500	0~500	No	0.06
	FSR-2	Piston	4500	0~2500	Yes	0.06 0.1 (Vent)
Changeover Systems ^①	FDR-1	Diaphragm	4500	0~500	No	0.06
	FDR-2	Piston	4500	0~2500	Yes	0.06 0.1 (Vent)
	CEPR	Diaphragm	3000	85~265	No	0.06
	FDR-1L	Diaphragm	4500	85~265	No	0.06
	DPPR	Diaphragm	3000	0~150	No	0.06
	FDR-1T	Diaphragm	4500	0~150	No	0.06
Point-of-Use Panels ^①	FPR-1	Diaphragm	1500	0~500	No	0.14
	FPR-1S	Diaphragm	1500	0~200	Yes	0.06

Notes:

① Sensing mechanism of pressure control panels, changeover systems and point-of-use panels refers to the sensing mechanism of the pressure regulator.

User's Guide

1. Pressure regulators are sensitive components, so handle them gently and do not bump them.
2. Pressure regulators should not be used as shutoff valves or safety valves.
3. For non-self-venting regulators, do not turn the handle counterclockwise (DECREASE) when there is no flow of media.
 - a> If residual pressure is present at the outlet of the pressure regulator when the media is not flowing, turning the handle counterclockwise (DECREASE) can cause the residual pressure to act directly on the sensing element (diaphragm or piston), potentially leading to regulator damage.
 - b> To reduce the set pressure at the regulator outlet, adjust only when the media is flowing (i.e., when there is flow).
4. Pressure regulators with bottom mounting or panel mounting type available, when panel mounting is selected, handles of some series products need to be removed for installation. When removing the handle, ensure that the handle and stem positions are not changed, otherwise the outlet pressure range will not be the same as the factory setting.
5. Before the pressure regulators are connected to the piping system, the system must be purged to remove impurities from the system, such as iron filings from tubing cutting or welding slag from tubing welding.
6. If the media contain impurities, a filter must be installed upstream, otherwise the impurities will damage the pressure regulators, which will lead to the failure of the pressure regulating function of the pressure regulators and the continuous increase of downstream pressure. The downstream pressure will continue to rise and damage the downstream pressure gauge or other equipment. FITOK FT series 15 μm filters are recommended.
7. When installing a pressure regulator, verify the inlet and outlet. do not allow any loose thread sealing tape or thread sealant to enter the pressure regulators. If the outlet is connected to a high pressure source exceeding the outlet pressure set point, the regulator may be easily damaged.
8. After the pressure regulators are connected to the pipeline, make sure that the pressure regulators are in the closed position by turning the handle before using the pressure regulators. For pressure regulators, turn the handle counterclockwise until it is loosened to the closed position.
9. Check connections for leakage by applying leak detection fluid to all connections, turning the handle clockwise to set the outlet pressure to the desired pressure, and observing the connections for leakage.
10. If the pressure regulators are used for liquid media, the filter element installed at the inlet of the pressure regulators may clog and cause a pressure drop and flow reduction. It is recommended to remove the filter element and install a filter upstream the inlet of the pressure regulators.

Regulators



Contents

General Diaphragm Regulators RDGC Series	A-15
Dual-stage Diaphragm Regulators RDDC Series	A-21
Sensitive Diaphragm Regulators RDSC Series	A-27
Medium Flow Diaphragm Regulators RDGH Series	A-33
High Flow Diaphragm Regulators RDGN Series	A-39
Steam Heated Regulators RDVC Series	A-45
General Piston Regulators RPGC Series	A-50
Compact Piston Regulators RPCC Series	A-56
High Pressure Piston Regulators RPGX Series	A-61
High Flow Piston Regulators RPGN Series	A-67

General Diaphragm Regulators

RDGC Series

Introduction

RDGC Series General Diaphragm Regulators feature a single-stage pressure reduction design with a combination of metal diaphragm and free poppet. This configuration ensures excellent sensitivity and stable outlet pressure, making these valves ideal for a variety of gas and low-viscosity liquid media that feature low to medium flow.





Features

- Compact design and lightweight.
- Lift poppet is made of Alloy C-276, offering excellent corrosion resistance.
- Metal-to-metal seal between valve body and diaphragm provides ensured sealing performance.
- Reinforced diaphragm improves sealing performance and extends service life.
- The bonnet includes a captured vent port, allowing media to be vented to a designated location in the event of accidental diaphragm rupture.

Technical Data

Port Size		1/4", 3/8", 6 mm or 8 mm	
Max. Working Pressure		4500 psig (310 bar)	
Outlet Pressure Range		0 ~ 25 psig (0 ~ 1.7 bar)	
		0 ~ 50 psig (0 ~ 3.4 bar)	
		0 ~ 100 psig (0 ~ 6.9 bar)	
		0 ~ 150 psig (0 ~ 10.3 bar)	
		0 ~ 250 psig (0 ~ 17.2 bar)	
		0 ~ 500 psig (0 ~ 34.5 bar)	
Flow Coefficient (Cv)		500, 1500 psig Inlet: 0.2 (34.5, 103 bar Inlet: 0.2)	
		3500, 4500 psig Inlet: 0.09 (241, 310 bar Inlet: 0.09)	
Working Temperature		PCTFE: -40 ~ 165 °F (-40 ~ 74 °C) Polyimide: 14 ~ 194 °F (-10 ~ 90 °C)	
SPE (Supply Pressure Effect)		1.5 psig per 100 psig source pressure change	
Leak Rate (Helium)	External	Inboard	≤2×10 ⁻¹⁰ std cm ³ /s
		Outboard	≤2×10 ⁻⁹ std cm ³ /s
	Internal		≤4×10 ⁻⁸ std cm ³ /s

Flow Data

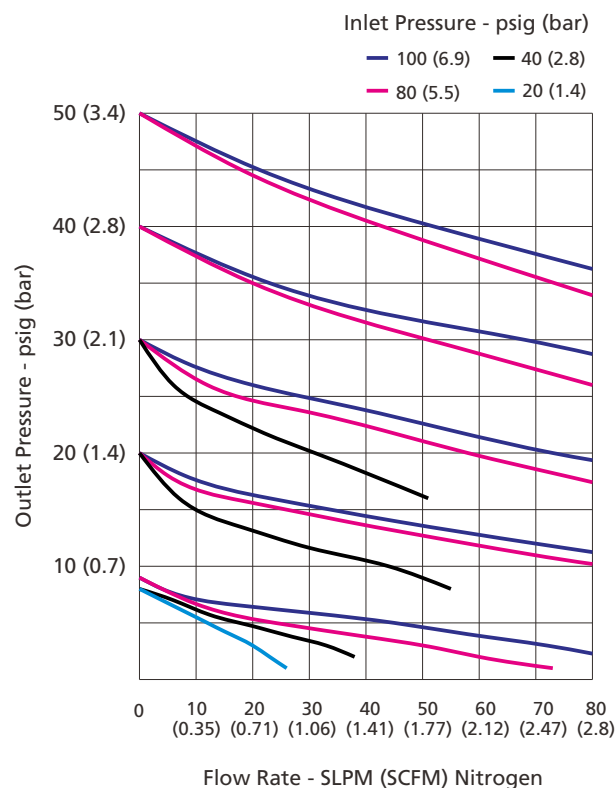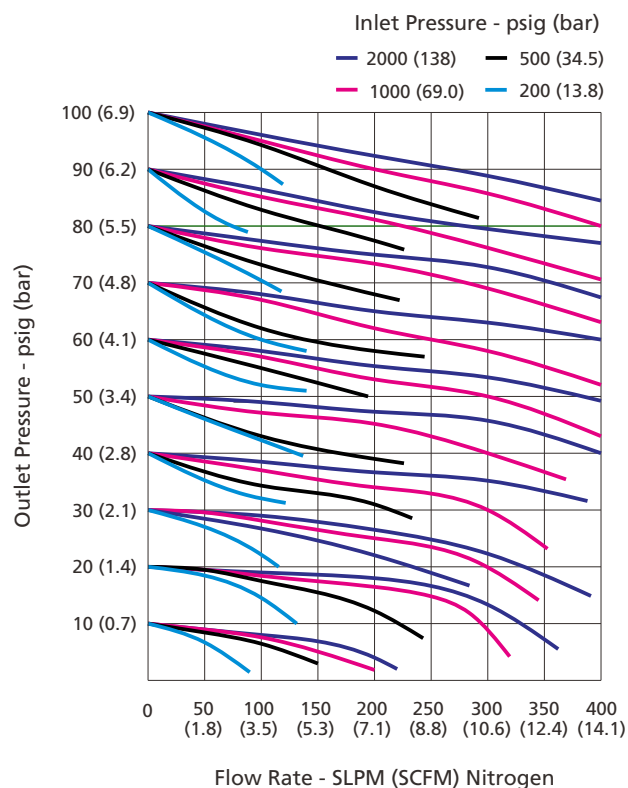


Process Specification

Item	Process Specification	
	Special Cleaning and Packaging (FC-02)	Ultra High Purity (FC-03)
Material	316L SS, 316L SS VAR, Brass (Nickle-Plated), Alloy C-276	316L SS, 316L SS VAR
Wetted Surface Roughness	Face Seal Connection or Butt Weld Connection: Ra 20 $\mu\text{in.}$ (0.5 μm) Threaded Connection or Tube Fitting Connection: Ra 32 $\mu\text{in.}$ (0.8 μm)	Face Seal Connection and Butt Weld Connection: Ra 10 $\mu\text{in.}$ (0.25 μm)
Polishing Process	Machine Finished	Electropolished
Assembly Environment	In specially cleaned areas	ISO Class 4 (FS 209E Class 10 equivalent) cleanroom
Packaging	Double bagged	Double bagged in cleanroom

Note: For products with higher surface finish, please contact FITOK.


Major Materials of Construction

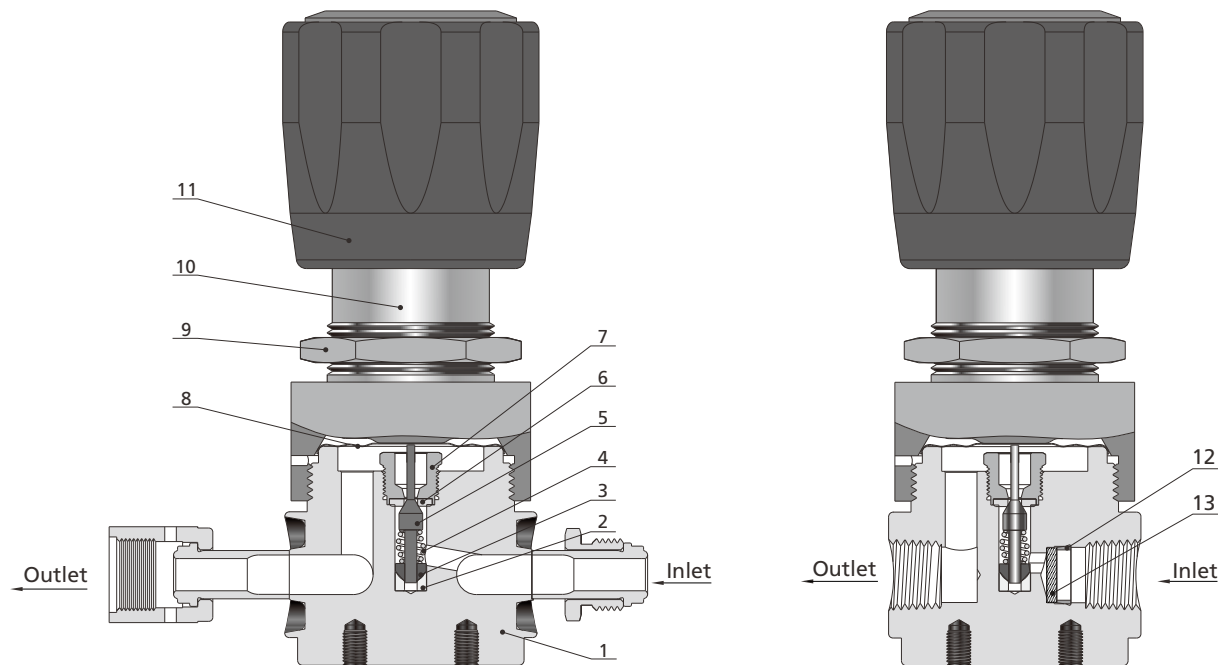

Item	Component	Material/Specification
1	Body	316L SS, 316L SS VAR, Brass (Nickle-Plated) or Alloy C-276
2	Friction Sleeve	316L SS, 316L SS VAR or Alloy C-276
3	Poppet Damper	PTFE/ASTM D1710
4	Poppet Spring	Alloy X-750
5	Lift Poppet	Alloy C-276/ASTM B574
6	Seat	PCTFE/ASTM D1430 or Polyimide
7	Seat Retainer	316L SS, 316L SS VAR or Alloy C-276
8	Diaphragm	316L SS/ASTM A240
9	Panel Nut	304 SS/ASTM A479
10	Bonnet	304 SS/ASTM A479 or Brass (Nickle-Plated)
11	Handle	ABS
12	Retaining Ring ^①	PTFE
13	Filter ^①	316L SS

Note: ^① Models featuring HC material, metal gasket face seal fitting connections, or butt weld connections are not equipped with a filter element. All other models include a filter element with a particle removal rating of 40 µm at the inlet.

Porting Configurations

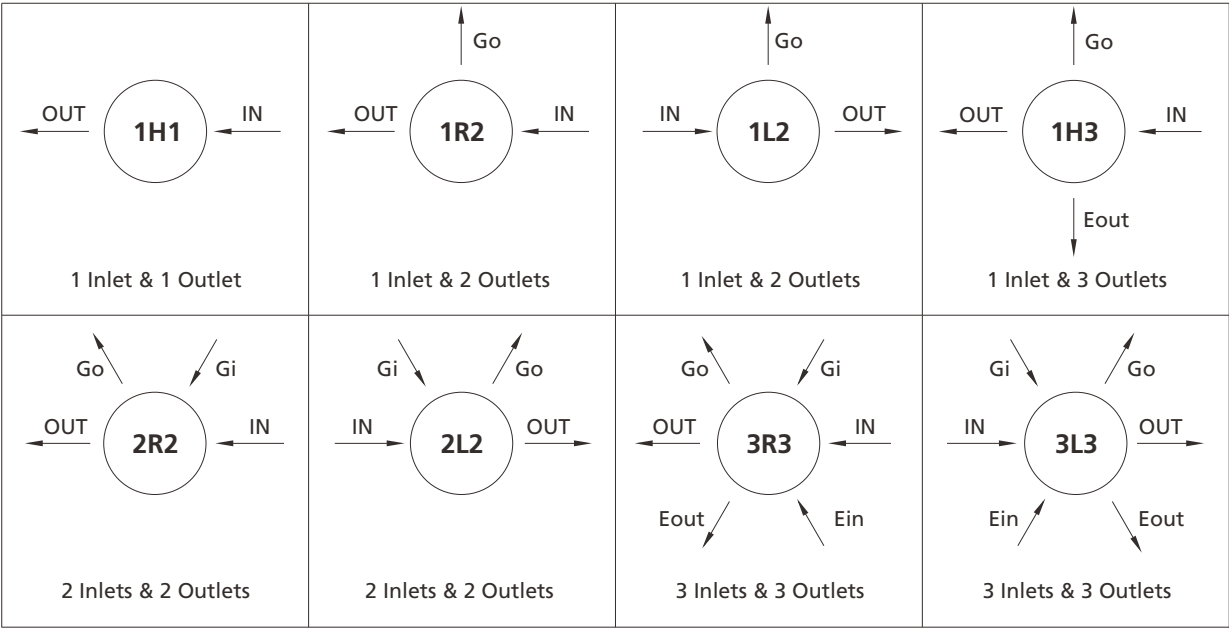





Porting Configuration Symbol

IN	OUT	Gi	Go	Ein	Eout
Inlet	Outlet	Inlet Pressure Gauge Port	Outlet Pressure Gauge Port	Auxiliary Inlet	Auxiliary Outlet

- Notes:
- 1. IN and OUT are the inlet and outlet ports for connecting the valve to the system. Ports other than IN and OUT should not be used for system connections.
 - 2. Porting configuration is viewed from the top.

Dimensions and Ordering Information

Dimensions, in inches (millimeters), are for reference only.

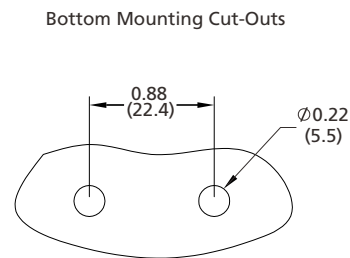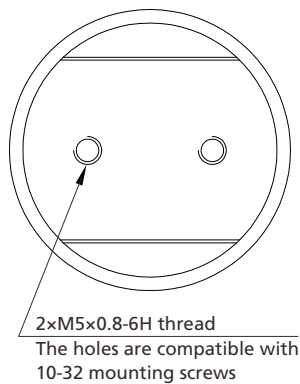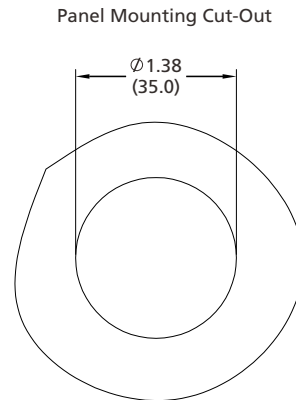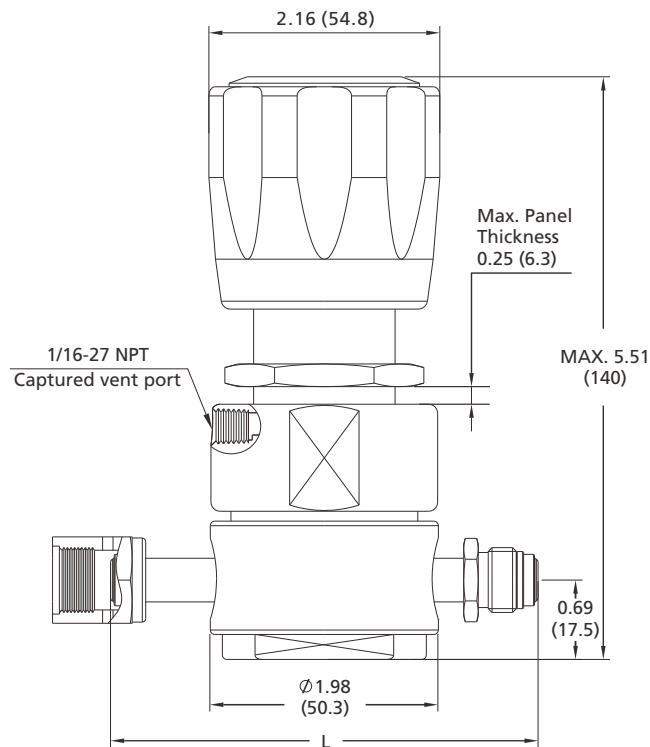

Connection Designator	Connection Type and Size	Dimension, in.(mm)
		L
FFR4	1/4" Rotatable Female FR Metal Gasket Face Seal Fitting	3.7 (94.0)
RFR4	1/4" Rotatable Male FR Metal Gasket Face Seal Fitting	3.7 (94.0)
FNS4	1/4" Female NPT	1.98 (50.3)
TB4	1/4" x0.035" Tube Butt Weld	2.96 (75.2)
FL4	1/4" Tube Fitting	3.95 (100.3)
TB6	3/8" x0.035" Tube Butt Weld	2.96 (75.2)
FL6	3/8" Tube Fitting	4.19 (106.4)
ML6	6 mm Tube Fitting	3.98 (101.0)
ML8	8 mm Tube Fitting	4.04 (102.5)

Ordering Number Description

RDGC - 6L - 35H - 1H - 3R3 - C580 - FNS4 - IBAP - OBRP - V - ATPM - F2									
Body Material		Porting		Inlet (IN)		Outlet (OUT)		Auxiliary Outlet (Eout)	
6L	316L SS	1H1	1 Inlet & 1 Outlet	C_	CGA Cylinder Connection (For Inlet Only)		Same as Inlet		Without plug, refer to Note 6
6LV	316L SS VAR	1R2	1 Inlet & 2 Outlets	DIN_	DIN Cylinder Connection (For Inlet Only)		Specified in the same way as Inlet	RP	Plug
B	Brass (Nickel Plated)	1L2	1 Inlet & 2 Outlets			Inlet Pressure Gauge Port (Gi)		R	With relief valve, refer to Note 7
HC	Alloy C-276	1H3	1 Inlet & 3 Outlets	FFR4	1/4" Rotatable Female FR Metal Gasket Face Seal Fitting		Without pressure gauge, refer to Note 6	Seat Material	
Max. Inlet Pressure		2R2	2 Inlets & 2 Outlets	RFR4	1/4" Rotatable Male FR Metal Gasket Face Seal Fitting	IB	Gauge (psi/bar)	PCTFE	
5H	500 psig (34.5 bar)	2L2	2 Inlets & 2 Outlets	FNS4	1/4" Female NPT	IM	Gauge (psi/MPa)	V	Polyimide
15H	1500 psig (103 bar)	3R3	3 Inlets & 3 Outlets	TB4	1/4"x0.035" Tube Butt Weld	IP	Plug	Handle	
35H	3500 psig (241 bar)	3L3	3 Inlets & 3 Outlets	FL4	1/4" Tube Fitting	Auxiliary Inlet (Ein)		Round Handle	
45H	4500 psig (310 bar)			TB6	3/8"x0.035" Tube Butt Weld (Not applicable for 4500 psig inlet pressure)		Without plug, refer to Note 6	AT	For lock nut, see Note 8
Outlet Pressure Range				FL6	3/8" Tube Fitting	AP	Plug	Installation Type	
25	0~25 psig (0~1.7 bar)			ML6	6 mm Tube Fitting	Outlet Pressure Gauge Port (Go)		Threaded Hole at the Bottom	
50	0~50 psig (0~3.4 bar)			ML8	8 mm Tube Fitting		Without pressure gauge, refer to Note 6	PM	Installed with Panel Nut
1H	0~100 psig (0~6.9 bar)					OB	Gauge (psi/bar)	BS	Installed with Screws at the Bottom
150	0~150 psig (0~10.3 bar)					OM	Gauge (psi/MPa)	Process Specification	
250	0~250 psig (0~17.2 bar)					OP	Plug	F2	FC-02
5H	0~500 psig (0~34.5 bar)							F3	FC-03

Notes:

- "Ordering Number Description" is a reference to understand the combination rules of FITOK product part number. Not all combinations are available.
- For metal gasket face seal fitting connection or tube butt weld connection, the connection and body are orbital-welded integral structure by default.
- For NPT connection and tube fitting connection, the body connection is 1/4" Female NPT by default. Other options are adapted from Male NPT.
- Models involving HC material, metal gasket face seal fitting connection, or butt weld connection are not equipped with filter element. Other part numbers are equipped with filter element with a particle removal rating of 40 µm at inlet.
- Refer to Cylinder Connections catalog for connection details.
- When choosing Cylinder Connection, NPT, or Tube Fitting for inlet and outlet, gauge connection (Gi, Go) and auxiliary port (Ein, Eout) are 1/4" Female NPT. When choosing Metal Gasket Face Seal Fitting or Tube Butt Weld for inlet and outlet, gauge connection (Gi, Go) is 1/4" Rotatable Male FR Metal Gasket Face Seal Fitting, without auxiliary connection (Ein, Eout) options.
- For outlet relief valve, the set pressure is established at 1.05-1.1 times the maximum outlet pressure upon shipping, FITOK can preset the specified set pressure according to customer requirements. Please specify the desired set pressure when placing your order.
- Lock nut (AT): The metal lock nut construction is designed to prevent accidental pressure adjustments. FITOK can set the specified outlet pressure based on customer requirements; simply include this information in the remarks when placing an order. If the outlet pressure is not specified, customers will need to adjust and fix it themselves.

Two-Stage Diaphragm Regulators

RDDC Series

Introduction

RDDC Series Two-Stage Diaphragm Regulators feature a two-stage pressure reduction design. The combination of a metal diaphragm and a free poppet ensures excellent sensitivity and stable outlet pressure. This configuration makes these regulators ideal for low to medium flow applications that require steady outlet pressure.




Features

- ⦿ Lift poppet is made of Alloy C-276, offering excellent corrosion resistance.
- ⦿ Metal-to-metal seal between valve body and diaphragm provides ensured sealing performance.
- ⦿ Two-stage pressure reduction design ensures precise and stable outlet pressure.
- ⦿ The bonnet includes a captured vent port, allowing media to be vented to a designated location in the event of accidental diaphragm rupture.

Technical Data

Port Size		1/4", 3/8", 6 mm or 8 mm	
Max. Working Pressure		4500 psig (310 bar)	
Outlet Pressure Range		0 ~ 25 psig (0 ~ 1.7 bar)	
		0 ~ 50 psig (0 ~ 3.4 bar)	
		0 ~ 100 psig (0 ~ 6.9 bar)	
		0 ~ 150 psig (0 ~ 10.3 bar)	
		0 ~ 250 psig (0 ~ 17.2 bar)	
Flow Coefficient (Cv)		0.06	
Working Temperature		PCTFE: -40 ~ 165°F (-40 ~ 74°C) Polyimide: 14 ~ 194°F (-10 ~ 90°C)	
SPE (Supply Pressure Effect)		0.01 psig per 100 psig source pressure change	
Leak Rate (Helium)	External	Inboard	≤2×10 ⁻¹⁰ std cm ³ /s
		Outboard	≤2×10 ⁻⁹ std cm ³ /s
	Internal		≤4×10 ⁻⁸ std cm ³ /s

Flow Data

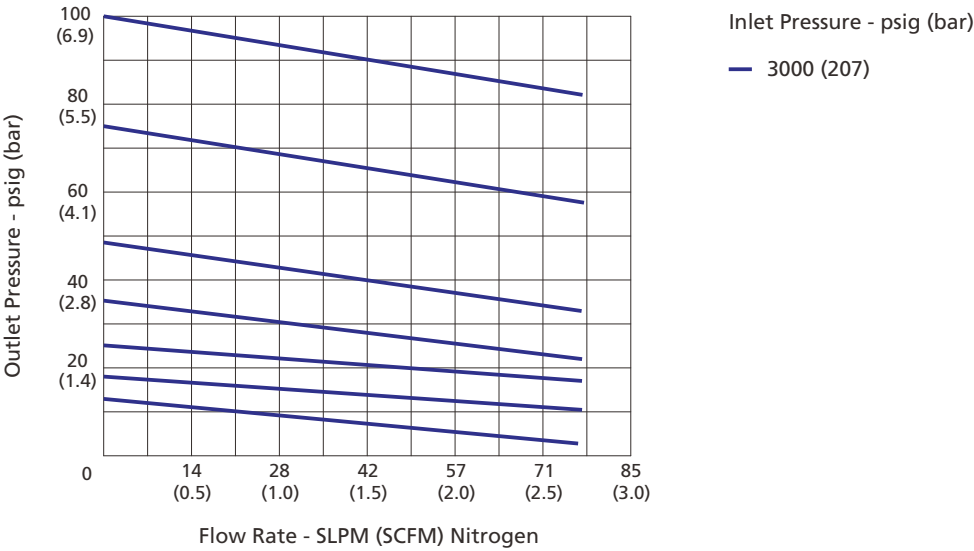


Process Specification

Process Specification		
Item	Special Cleaning and Packaging Process (FC-02)	Ultra High Purity Process (FC-03)
Material	316L SS, 316L SS VAR, Brass (Nickle-Plated), Alloy C-276	316L SS, 316L SS VAR
Wetted Surface Roughness	Face Seal Connection or Butt Weld Connection: Ra 20 µin. (0.5 µm) Threaded Connection or Tube Fitting Connection: Ra 32 µin. (0.8 µm)	Face Seal Connection or Butt Weld Connection: Ra 10 µin. (0.25 µm)
Polishing Process	Machine Finished	Electropolished
Assembly Environment	In specially cleaned areas	ISO Class 4 (FS 209E Class 10 equivalent) cleanroom
Packaging	Double bagged	Double bagged in cleanroom

Note: For products with higher surface finish, please contact FITOK.

Major Materials of Construction

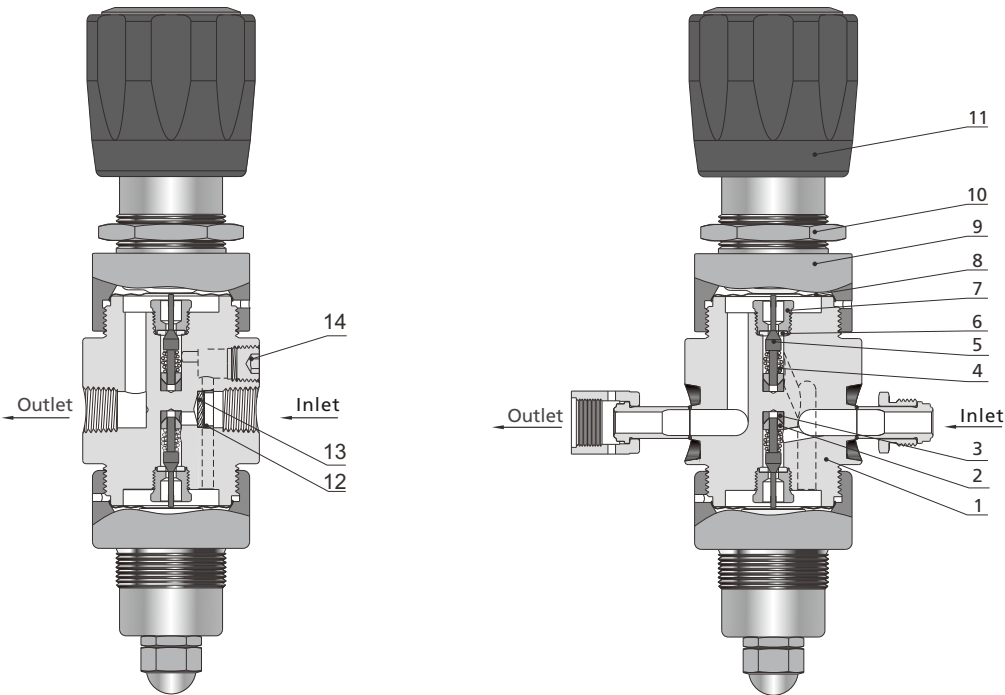


Item	Component	Material/Specification
1	Body	316L SS, 316L SS VAR, Brass (Nickle-Plated) or Alloy C-276
2	Poppet Damper	PTFE/ASTM D1710
3	Friction Sleeve	316L SS, 316L SS VAR or Alloy C-276
4	Poppet Spring	Alloy X-750
5	Lift Poppet	Alloy C-276
6	Seat	PCTFE/ASTM D1430 or Polyimide
7	Seat Retainer	316L SS, 316L SS VAR or Alloy C-276
8	Diaphragm	316L SS/ASTM A240
9	Bonnet	304 SS/ASTM A479 or Brass (Nickle-Plated)
10	Panel Nut	304 SS/ASTM A479
11	Handle	ABS
12	Retaining Ring ^①	PTFE
13	Filter ^①	316L SS
14	Interstage Hole Plug ^②	316L SS or Alloy C-276 (Including PTFE Sealing Tape)

Note: ① Models featuring HC material, metal gasket face seal fitting connections, or butt weld connections are not equipped with a filter element. All other models include a filter element with a particle removal rating of 40 µm at the inlet.

② Models with metal gasket face seal fitting connections or butt weld connections do not have interstage holes. In other models, interstage holes are present and plugged.

Porting Configurations

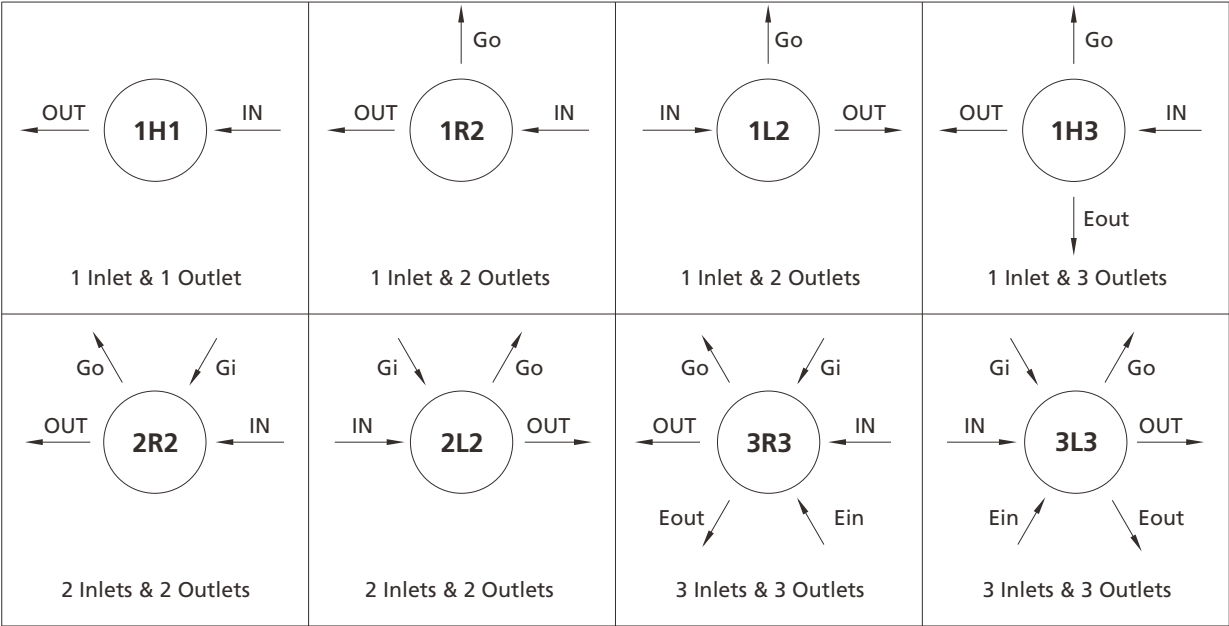


Porting Configuration Symbol

IN	OUT	Gi	Go	Ein	Eout
Inlet	Outlet	Inlet Pressure Gauge Port	Outlet Pressure Gauge Port	Auxiliary Inlet	Auxiliary Outlet

- Notes:
- 1. IN and OUT are the inlet and outlet ports for connecting the valve to the system. Ports other than IN and OUT should not be used for system connections.
 - 2. Porting configuration is viewed from the top.

Dimensions

Dimensions, in inches (millimeters), are for reference only.

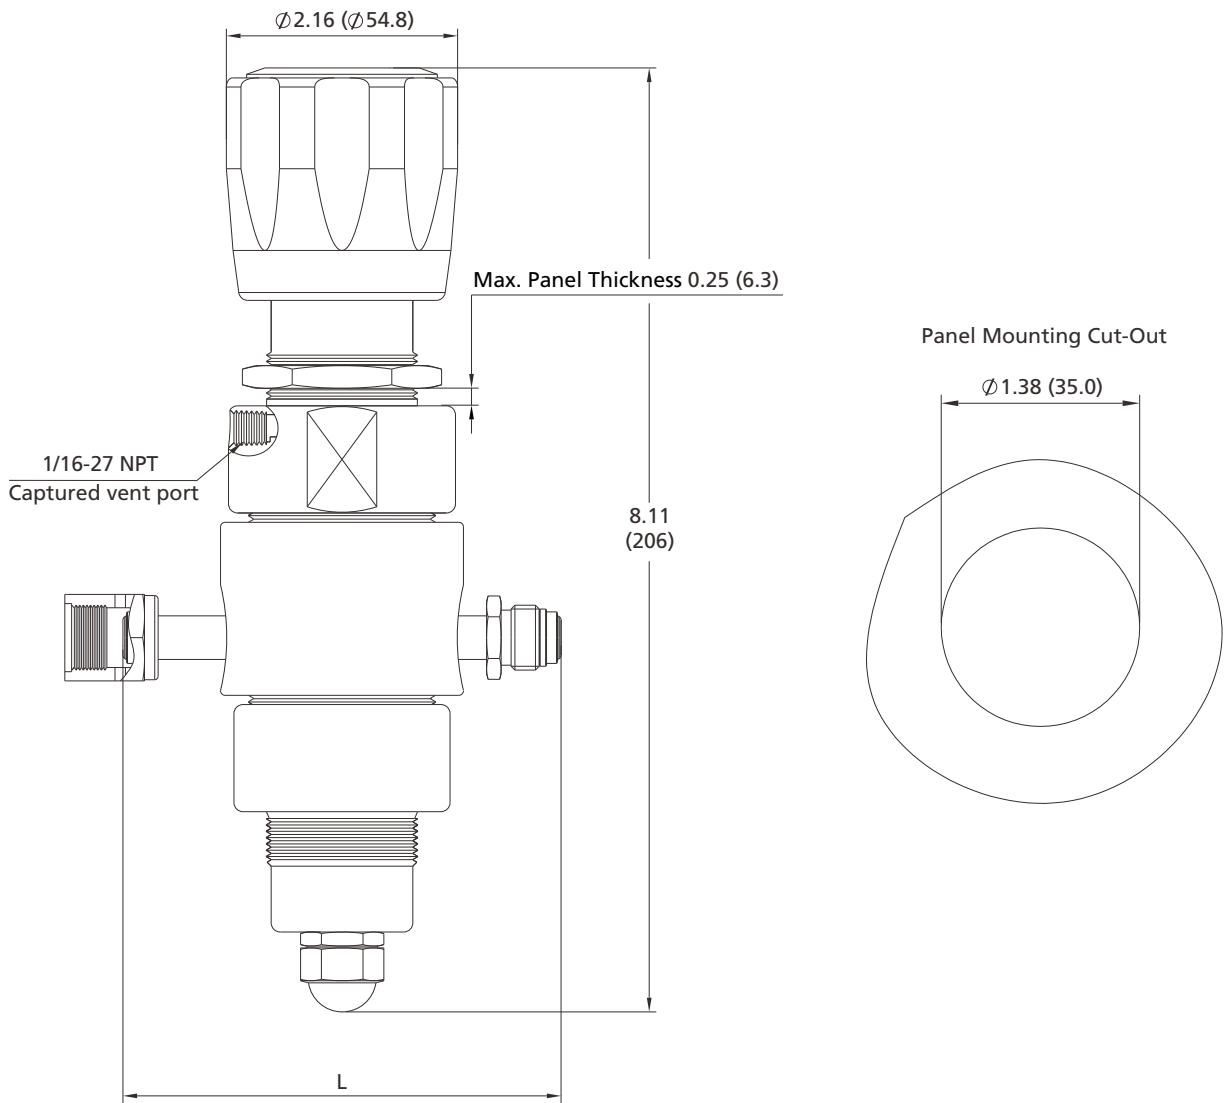

Connection Designator	Connection Type and Size	Dimension, in.(mm)
		L
FFR4	1/4" Rotatable Female FR Metal Gasket Face Seal Fitting	3.7 (94.0)
RFR4	1/4" Rotatable Male FR Metal Gasket Face Seal Fitting	3.7 (94.0)
FNS4	1/4" Female NPT	2.11 (53.5)
TB4	1/4"×0.035" Tube Butt Weld	2.96 (75.2)
TB6	3/8"×0.035" Tube Butt Weld	2.96 (75.2)
FL4	1/4" Tube Fitting	4.07 (103.5)
FL6	3/8" Tube Fitting	4.31 (109.6)
ML6	6 mm Tube Fitting	4.10 (104.2)
ML8	8 mm Tube Fitting	4.16 (105.7)

Ordering Number Description

RDDC – 6L – 35H – 1H – 3R3 – C580 – FNS4 – IBAP – OBRP – V – ATPM – F2	
Body Material	Porting
6L 316L SS	1H1 1 Inlet & 1 Outlet
6LV 316L SS VAR	1R2 1 Inlet & 2 Outlets
B Brass (Nickel Plated)	1L2 1 Inlet & 2 Outlets
HC Alloy C-276	1H3 1 Inlet & 3 Outlets
	2R2 2 Inlets & 2 Outlets
	2L2 2 Inlets & 2 Outlets
	3R3 3 Inlets & 3 Outlets
	3L3 3 Inlets & 3 Outlets
Max. Inlet Pressure	Inlet (IN)
35H 3500 psig (241 bar)	C_ CGA Cylinder Connection (For Inlet Only)
45H 4500 psig (310 bar)	DIN_ DIN Cylinder Connection (For Inlet Only)
	FFR4 1/4" Rotatable Female FR Metal Gasket Face Seal Fitting
	RFR4 1/4" Rotatable Male FR Metal Gasket Face Seal Fitting
	TB4 1/4"x0.035" Tube Butt Weld
	TB6 3/8"x0.035" Tube Butt Weld
	FNS4 1/4" Female NPT
	FL4 1/4" Tube Fitting
	FL6 3/8" Tube Fitting
	ML6 6 mm Tube Fitting
	ML8 8 mm Tube Fitting
Outlet Pressure Range	Outlet (OUT)
25 0~25 psig (0~1.7 bar)	Same as Inlet
50 0~50 psig (0~3.4 bar)	Specified in the same way as Inlet
1H 0~100 psig (0~6.9 bar)	
150 0~150 psig (0~10.3 bar)	Inlet Pressure Gauge Port (Gi)
250 0~250 psig (0~17.2 bar)	Without pressure gauge, refer to Note 6
	IB Gauge (psi/bar)
	IM Gauge (psi/MPa)
	IP Plug
	Auxiliary Inlet (Ein)
	Without plug, refer to Note 6
	AP Plug
	Outlet Pressure Gauge Port (Go)
	Without pressure gauge, refer to Note 6
	OB Gauge (psi/bar)
	OM Gauge (psi/MPa)
	OP Plug
	Seat Material
	PCTFE
	V Polyimide
	Auxiliary Outlet (Eout)
	Without plug, refer to Note 6
	RP Plug
	R With relief valve, refer to Note 7
	Handle
	Round Handle
	AT Lock Nut, refer to Note 8
	Installation Type
	Fixedly Mounted at Pipe Inlet or Outlet
	PM Installed with Panel Nut
	Process Specification
	F2 FC-02
	F3 FC-03

Notes:

- "Ordering Number Description" is a reference to understand the combination rules of FITOK product part number.
Not all combinations are available.
- For metal gasket face seal fitting connection or tube butt weld connection, the connection and body are orbital-welded integral structure by default.
- For NPT connection and Metric/Fractional Tube Fitting connection, the body connection is 1/4" Female NPT by default. Other options are adapted from Male NPT.
- Models involving HC material, metal gasket face seal fitting connection, or butt weld connection are not equipped with filter element. Other part numbers are equipped with filter element with a particle removal rating of 40 µm at inlet.
- Refer to Cylinder Connections catalog for connection details.
- When choosing Cylinder Connection, NPT, or Metric/Fractional Tube Fitting for inlet and outlet, gauge connection (Gi, Go) and auxiliary port (Ein, Eout) are 1/4" Female NPT.
When choosing Metal Gasket Face Seal Fitting or Tube Butt Weld for inlet and outlet, gauge connection (Gi, Go) is 1/4" Rotatable Male FR Metal Gasket Face Seal Fitting, without auxiliary connection (Ein, Eout) options.
- For outlet relief valve, the set pressure is established at 1.05-1.1 times the maximum outlet pressure upon shipping, FITOK can preset the specified set pressure according to customer requirements. Please specify the desired set pressure when placing your order.
- Lock nut (AT): The metal lock nut construction is designed to prevent accidental pressure adjustments. FITOK can set the specified outlet pressure based on customer requirements; simply include this information in the remarks when placing an order. If the outlet pressure is not specified, customers will need to adjust and fix it themselves.

Sensitive Diaphragm Regulators

RDSC Series

Introduction

RDSC Series Sensitive Diaphragm Regulators feature a single-stage pressure reduction design and a large-diameter diaphragm to enhance sensitivity to pressure fluctuations, making them ideal for low-flow, high-sensitivity applications.

Features


- ⦿ Lift poppet and diaphragm are made of Alloy C-276, offering excellent corrosion resistance.
- ⦿ Metal-to-metal seal between valve body and diaphragm provides ensured sealing performance.
- ⦿ Reinforced diaphragm design extends diaphragm service life.
- ⦿ The bonnet includes a captured vent port, allowing media to be vented to a designated location in the event of an accidental diaphragm rupture.

Technical Data

Port Size		1/4", 3/8", 6 mm or 8 mm	
Max. Working Pressure		4500 psig (310 bar)	
Outlet Pressure Range		0 ~ 25 psig (0 ~ 1.7 bar)	
		0 ~ 50 psig (0 ~ 3.4 bar)	
		0 ~ 100 psig (0 ~ 6.9 bar)	
		0 ~ 150 psig (0 ~ 10.3 bar)	
		0 ~ 200 psig (0 ~ 13.8 bar)	
Flow Coefficient (Cv)		0.06	
Working Temperature		-40 ~ 165 °F (-40 ~ 74 °C)	
SPE (Supply Pressure Effect)		0.5 psig per 100 psig source pressure change	
Leak Rate (Helium)	External	Inboard	≤2×10 ⁻¹⁰ std cm ³ /s
		Outboard	≤1×10 ⁻⁹ std cm ³ /s
	Internal		≤4×10 ⁻⁸ std cm ³ /s




Flow Data

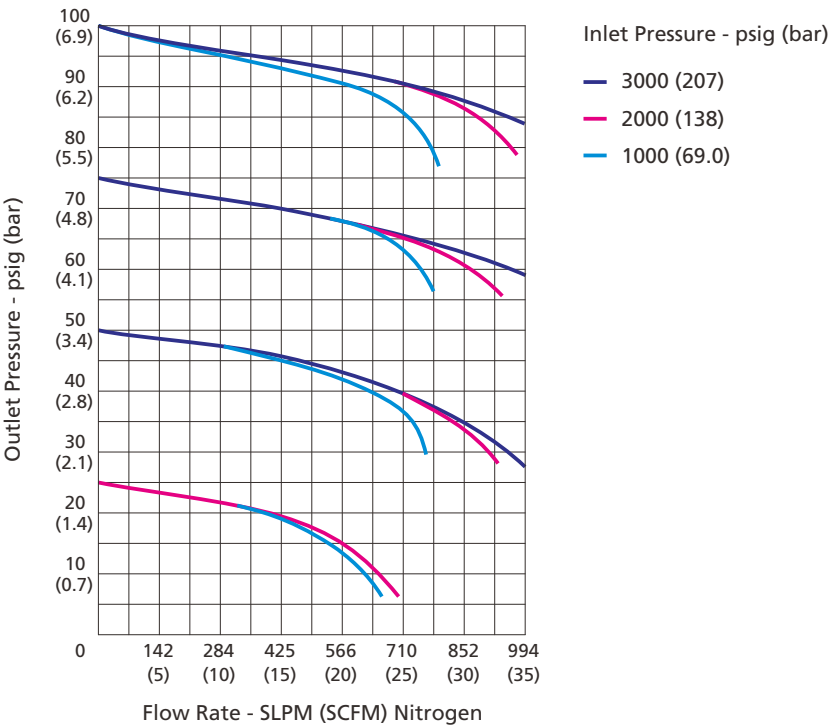


Process Specification	
Item	Special Cleaning and Packaging Process (FC-02)
Material	316L SS, 316L SS VAR, Brass
Wetted Surface Roughness	Ra 32 μin. (0.8 μm)
Polishing Process	Machine finished
Assembly Environment	In specially cleaned areas
Packaging	Double bagged

Major Materials of Construction

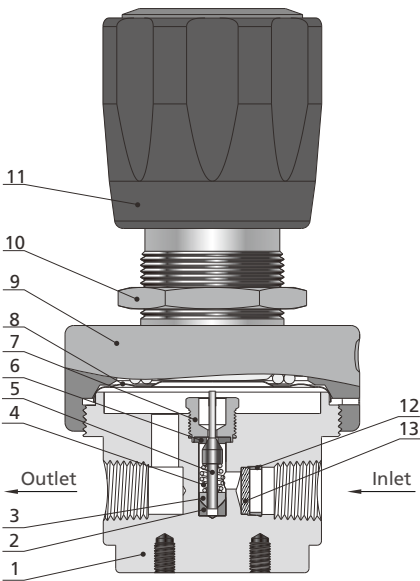

Item	Component	Material/Specification
1	Body	316L SS or 316L SS VAR or Brass
2	Friction Sleeve	316L SS or 316L SS VAR
3	Poppet Damper	PTFE/ASTM D1710
4	Poppet Spring	Alloy X-750
5	Lift Poppet	Alloy C-276/ASTM B574
6	Seat	PCTFE/ASTM D1430 or PTFE/ASTM D1710
7	Seat Retainer	316L SS or 316L SS VAR
8	Diaphragm	316L SS/ASTM A240
9	Bonnet	304 SS/ASTM A479 or Brass
10	Panel Nut	304 SS/ASTM A479
11	Handle	ABS
12	Retaining Ring	PTFE/ASTM D1710
13	Filter	316L SS

Porting Configurations

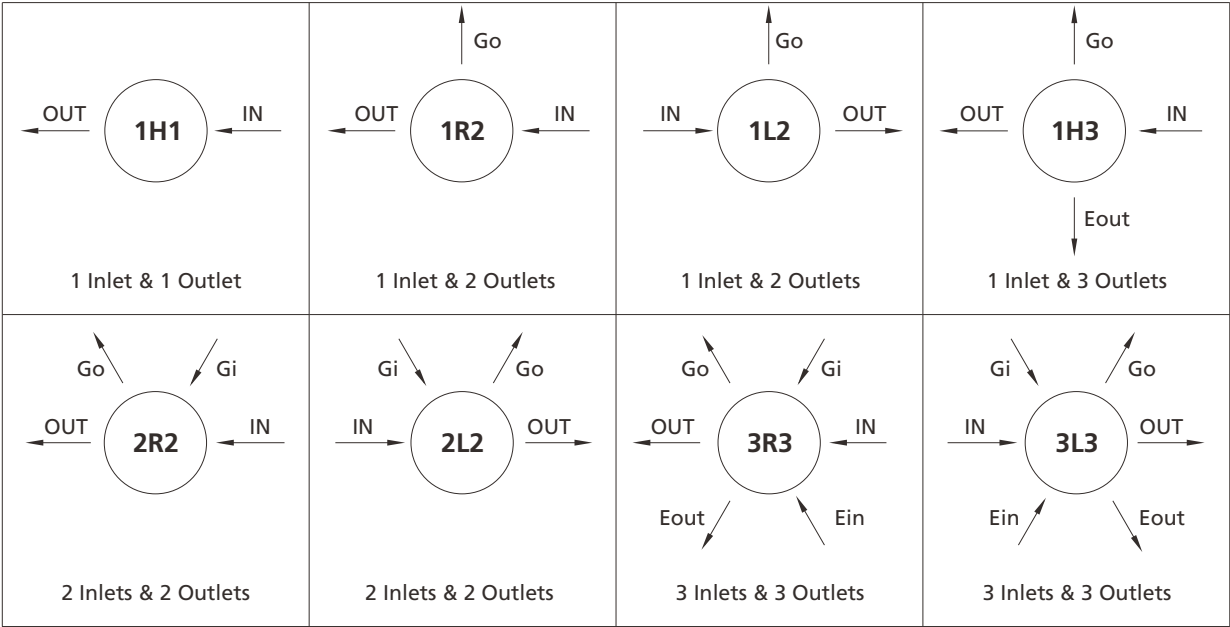



Porting Configuration Symbol

IN	OUT	Gi	Go	Ein	Eout
Inlet	Outlet	Inlet Pressure Gauge Port	Outlet Pressure Gauge Port	Auxiliary Inlet	Auxiliary Outlet


- Notes:
- 1. IN and OUT are the inlet and outlet ports for connecting the valve to the system. Ports other than IN and OUT should not be used for system connections.
 - 2. Porting configuration is viewed from the top.

Dimensions

Dimensions, in inches (millimeters), are for reference only.

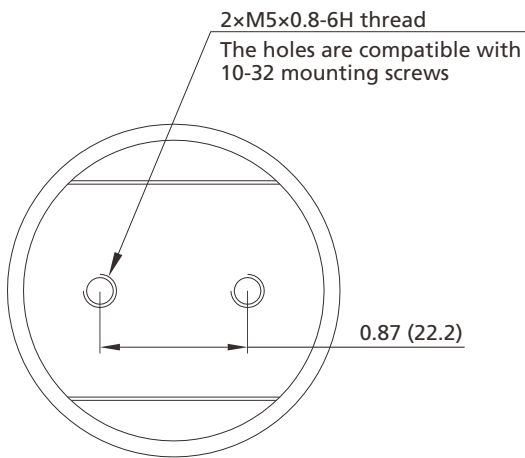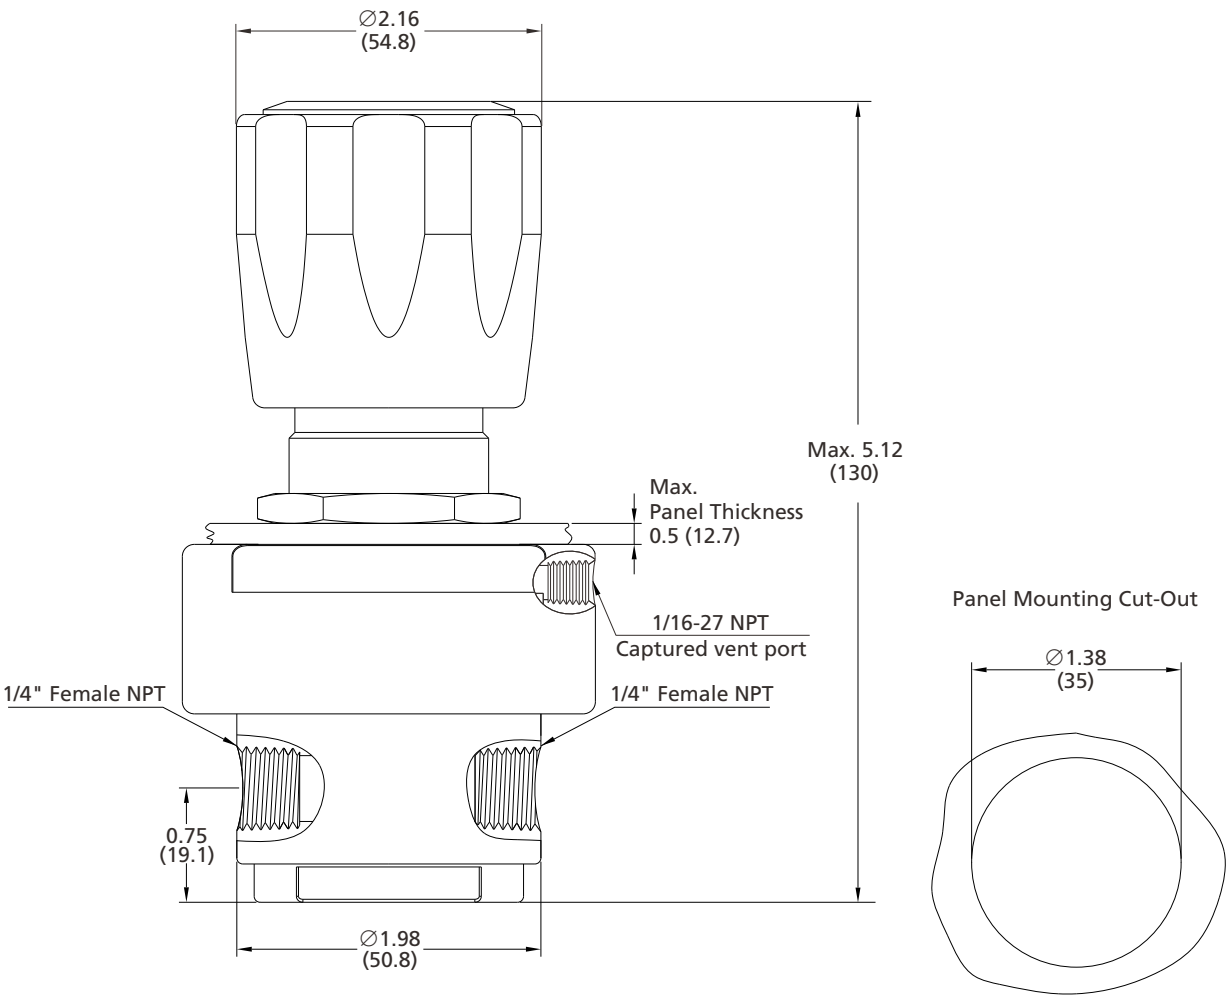


Bottom Mounting Screw Holes

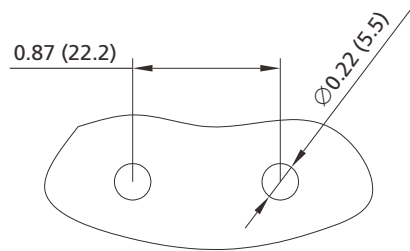

Bottom Mounting Cut-Outs

Ordering Number Description

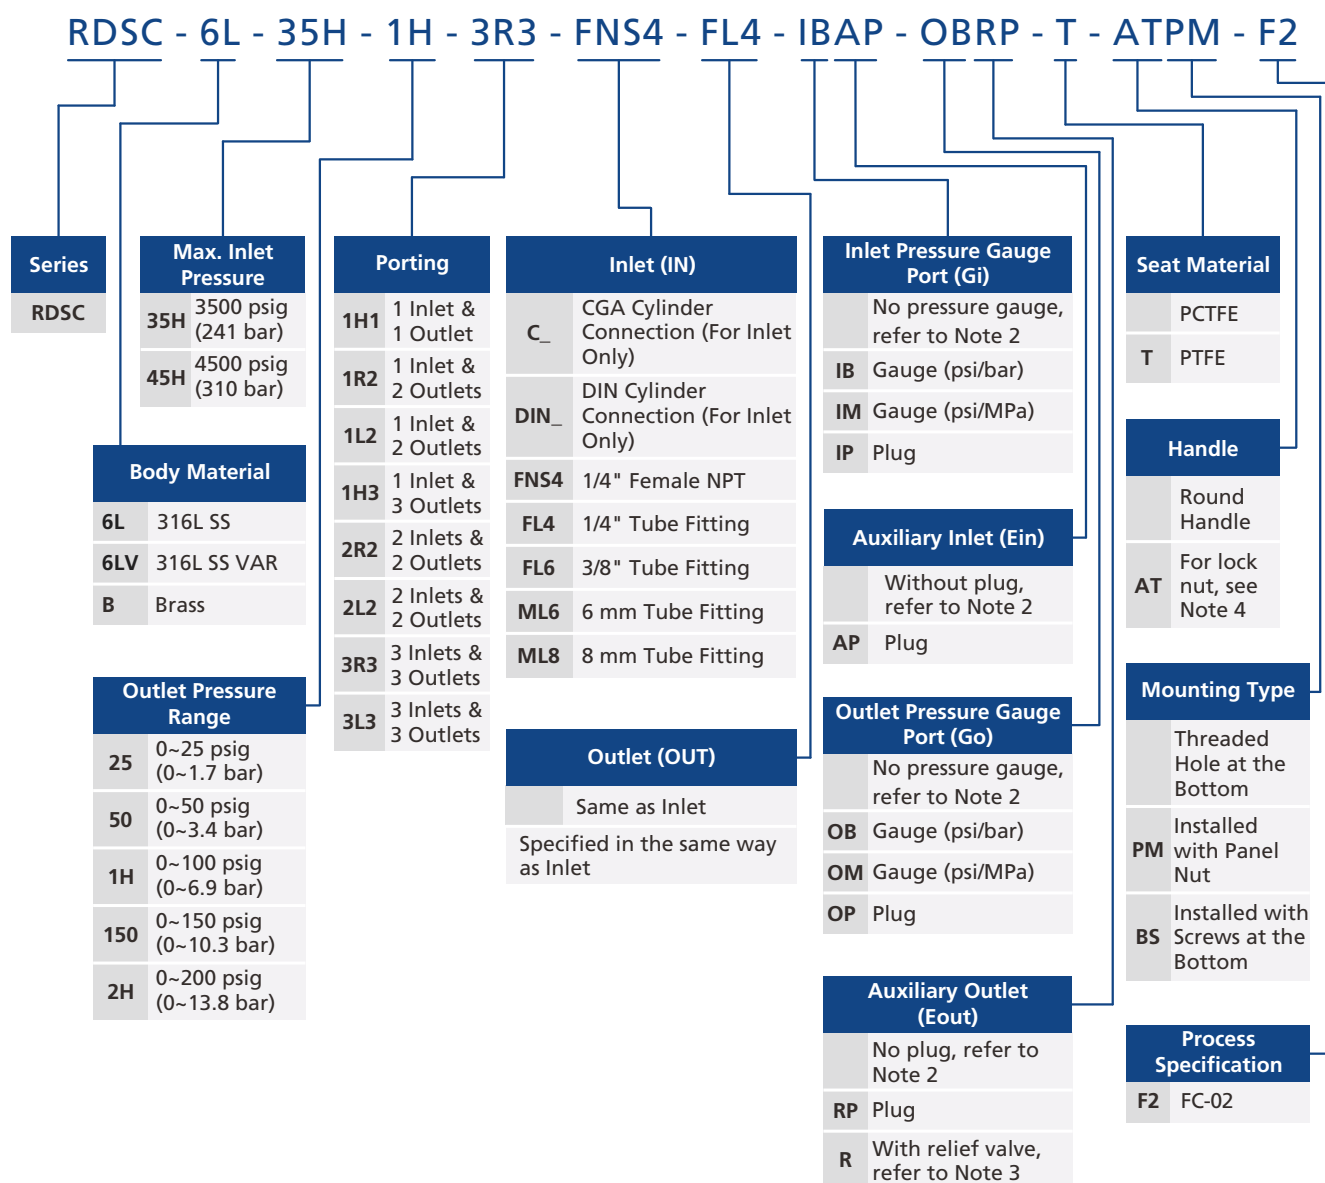

Notes:

- "Ordering Number Description" is a reference to understand the combination rules of FITOK product part number. Not all combinations are available.
- The body connection is 1/4" Female NPT by default. Other options are adapted from Male NPT.
- For the outlet relief valve, the set pressure is factory-set to 1.05-1.1 times the maximum outlet pressure by default, FITOK can preset the specified set pressure according to customer requirements. Please specify the desired set pressure when placing your order.
- Lock nut (AT): The metal lock nut construction is designed to prevent accidental pressure adjustments. FITOK can set the specified outlet pressure based on customer requirements; simply include this information in the remarks when placing an order. If the outlet pressure is not specified, customers will need to adjust and fix it themselves.

Medium Flow Diaphragm Regulators

RDGH Series

Introduction

RDGH Series Medium Flow Diaphragm Regulators feature a single-stage pressure reduction design with a combination of metal diaphragm and free poppet. This configuration ensures excellent sensitivity and stable outlet pressure, making these valves ideal for various gas media with medium to high flow.

Features


- Large diameter diaphragm offers enhanced pressure sensitivity.
- Metal-to-metal seal between valve body and diaphragm provides ensured sealing performance.
- Reinforced diaphragm design extends diaphragm service life.
- The bonnet includes a captured vent port, allowing media to be vented to a designated location in the event of accidental diaphragm rupture.



Technical Data

Port Size		3/8" to 3/4", 10 mm or 12 mm	
Max. Working Pressure		500 psig (34.5 bar)	
		3000 psig (207 bar)	
Outlet Pressure Range		0 ~ 25 psig (0 ~ 1.7 bar)	
		0 ~ 50 psig (0 ~ 3.4 bar)	
		0 ~ 100 psig (0 ~ 6.9 bar)	
		0 ~ 150 psig (0 ~ 10.3 bar)	
		0 ~ 200 psig (0 ~ 13.8 bar)	
Flow Coefficient (Cv)		1.0	
Working Temperature		PTFE, PCTFE: -40 ~ 165 °F (-40 ~ 74 °C) PEEK: -40 ~ 400 °F (-40 ~ 204 °C)	
SPE (Supply Pressure Effect)	Max. Inlet Pressure: 500 psig		2 psig per 100 psig source pressure change
	Max. Inlet Pressure: 3000 psig		0.5 psig per 100 psig source pressure change
Leak Rate	External	Inboard	≤2×10 ⁻¹⁰ std cm ³ /s (Helium)
		Outboard	≤1×10 ⁻⁹ std cm ³ /s (Helium)
	Internal		Max. Inlet Pressure 500 psig: ≤4×10 ⁻⁸ std cm ³ /s (Helium)
			Max. Inlet Pressure 3000 psig: Bubble tight

Flow Data

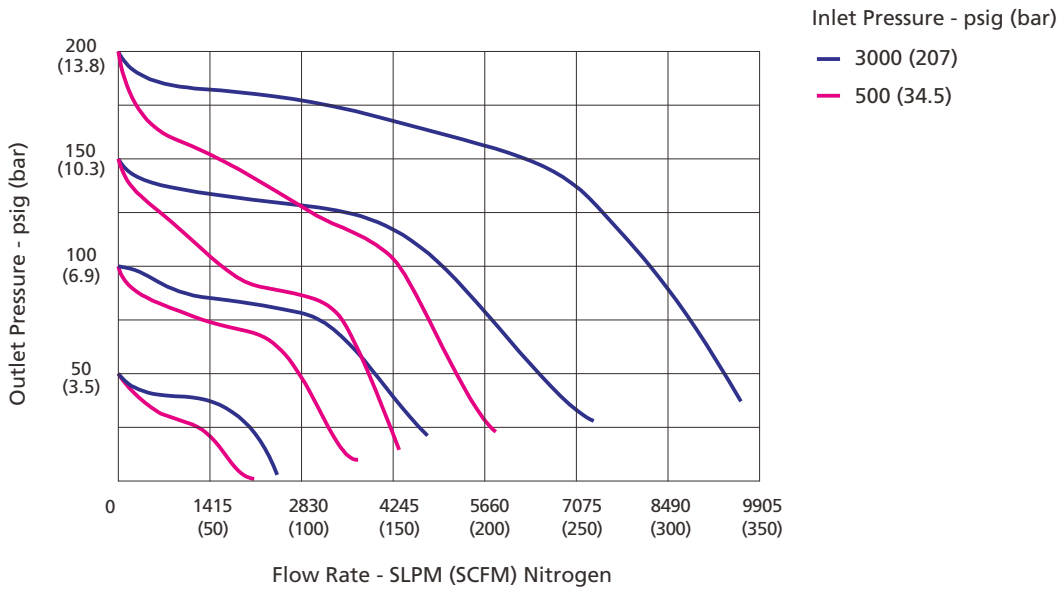


Process Specification

Item	Process Specification	Special Cleaning and Packaging Process (FC-02)	Ultra High Purity Process (FC-03)
Material		316L SS, 316L SS VAR, Brass	316L SS, 316L SS VAR
Wetted Surface Roughness		Face Seal Connection or Butt Weld Connection: Ra 20 μin. (0.5 μm) Threaded Connection or Tube Fitting Connection: Ra 32 μin. (0.8 μm)	Face Seal Connection or Butt Weld Connection: Ra 10 μin. (0.25 μm)
Polishing Process		Machine Finished	Electropolished
Assembly Environment		In specially cleaned areas	ISO Class 4 (FS 209E Class 10 equivalent) cleanroom
Packaging		Double bagged	Double bagged in cleanroom


Note: For products with higher surface finish, please contact FITOK.

Major Materials of Construction

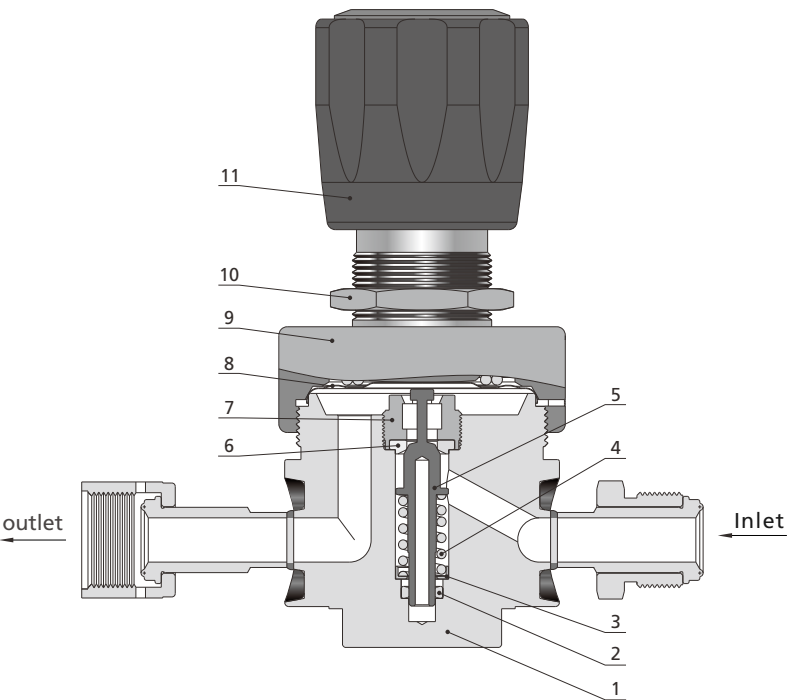

Item	Component	Material/Specification
1	Body	316L SS or 316L SS VAR or Brass
2	Guide Ring or Metal Spring Energized Seal	PTFE/ASTM D1710 or PTFE/ASTM D1710 and 316 SS/ASTM A479 or Cobalt Alloy/AMS 5876 or PEEK
3	Spring Seat	316L SS or 316L SS VAR
4	Poppet Spring	316 SS/ASTM A313 or Alloy X-750
5	Lift Poppet	316L SS or 316L SS VAR
6	Seat	PCTFE/ASTM D1430 or PTFE/ASTM D1710 or PEEK
7	Seat Retainer	316L SS or 316L SS VAR
8	Diaphragm	316L SS/ASTM A240
9	Bonnet	304 SS/ASTM A479 or Brass
10	Panel Nut	304 SS/ASTM A479
11	Handle	ABS or Aluminium alloy

Porting Configurations

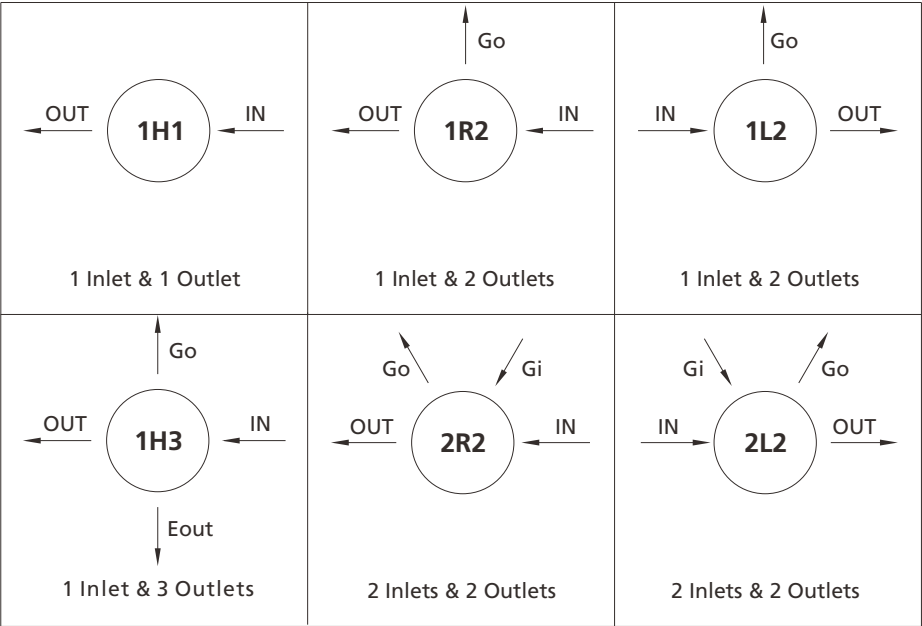


Porting Configuration Symbol

IN	OUT	Gi	Go	Eout
Inlet	Outlet	Inlet Pressure Gauge Port	Outlet Pressure Gauge Port	Auxiliary Outlet

- Notes:
- 1. IN and OUT are the inlet and outlet ports for connecting the valve to the system. Ports other than IN and OUT should not be used for system connections.
 - 2. Porting configuration is viewed from the top.

Dimensions

Dimensions, in inches (millimeters), are for reference only.

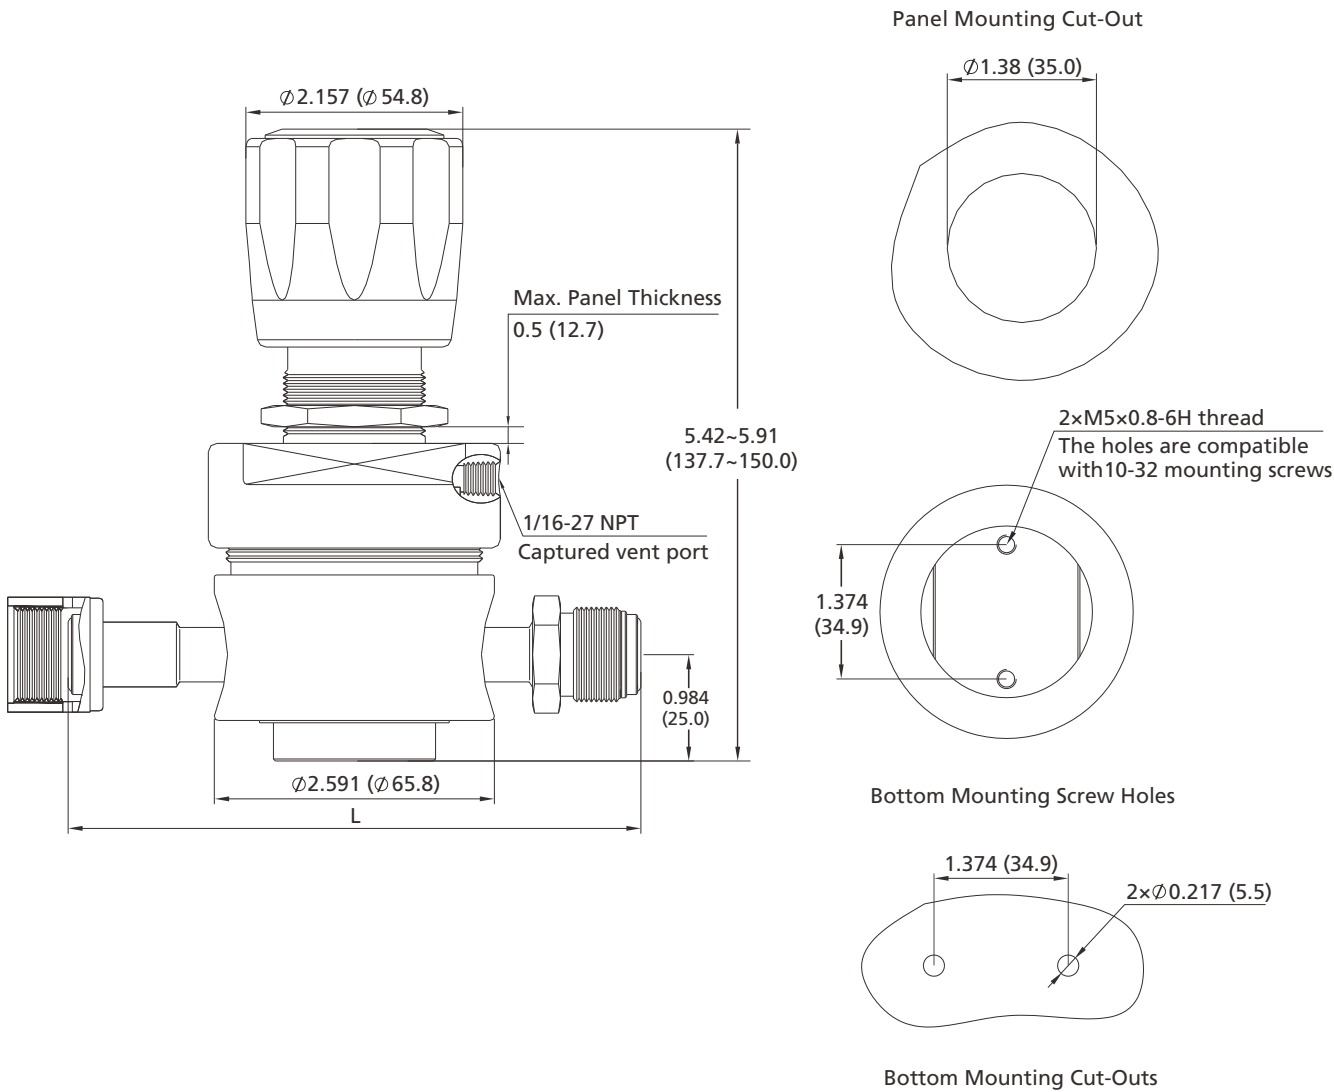

Connection Designator	Connection Type and Size	Dimension, in.(mm)
		L
FL6	3/8" Tube Fitting	5.43 (138.0)
FL8	1/2" Tube Fitting	5.16 (131.0)
FNS8	1/2" Female NPT	2.59 (65.8)
TB8	1/2" x 0.035" Tube Butt Weld	4.34 (110.2)
FFR8	1/2" Rotatable Female FR Metal Gasket Face Seal Fitting	5.28 (134.0)
RFR8	1/2" Rotatable Male FR Metal Gasket Face Seal Fitting	
ML10	10 mm Tube Fitting	5.39 (137.0)
ML12	12 mm Tube Fitting	5.59 (142.0)
FFR12	3/4" Rotatable Female FR Metal Gasket Face Seal Fitting	5.99 (152.2)
RFR12	3/4" Rotatable Male FR Metal Gasket Face Seal Fitting	

Ordering Number Description

RDGH - 6L - 3K - 1H - 2R2 - FNS8 - FL8 - IB - OB - T - ATPM - F2									
Series	Max. Inlet Pressure		Porting		Inlet (IN)		Inlet Pressure Gauge Port (Gi)		Seat Material
RDGH	5H	500 psig (34.5 bar)	1H1	1 Inlet & 1 Outlet	FL6	3/8" Tube Fitting		Without pressure gauge, refer to Note 4	PCTFE
	3K	3000 psig (207 bar)	1R2	1 Inlet & 2 Outlets	FL8	1/2" Tube Fitting	IB	Gauge psi/bar	T PTFE
Body Material			1L2	1 Inlet & 2 Outlets	FNS8	1/2" Female NPT	IM	Gauge psi/MPa	P PEEK
6L	316L SS		1H3	1 Inlet & 3 Outlets	TB8	1/2"x0.035"Tube Butt Weld	IP	Plug	
6LV	316L SS VAR		2R2	2 Inlets & 2 Outlets	FFR8	1/2" Rotatable Female FR Metal Gasket Face Seal Fitting	Outlet Pressure Gauge Port (Go)		Handle
B	Brass		2L2	2 Inlets & 2 Outlets	RFR8	1/2" Rotatable Male FR Metal Gasket Face Seal Fitting		Without pressure gauge, refer to Note 4	Round Handle
Outlet Pressure Range					ML10	10 mm Tube Fitting	OB	Gauge psi/bar	AT For lock nut, see Note 6
25	0~25 psig (0~1.7 bar)				ML12	12 mm Tube Fitting	OM	Gauge psi/MPa	
50	0~50 psig (0~3.4 bar)				FFR12	3/4" Rotatable Female FR Metal Gasket Face Seal Fitting	OP	Plug	Installation Type
1H	0~100 psig (0~6.9 bar)				RFR12	3/4" Rotatable Male FR Metal Gasket Face Seal Fitting	Auxiliary Outlet (Eout)		Threaded Hole at the Bottom
150	0~150 psig (0~10.3 bar)				Outlet (OUT)			Without plug, refer to Note 4	PM Installed with Panel Nut
2H	0~200 psig (0~13.8 bar)					Same as Inlet	RP	Plug	BS Installed with Screws at the Bottom
						Specified in the same way as Inlet	R	With relief valve, refer to Note 5	Process Specification
									F2 FC-02
									F3 FC-03

High Flow Diaphragm Regulators

RDGN Series

Introduction

RDGN Series High Flow Diaphragm Regulators feature a single-stage pressure reduction design with a combination of metal diaphragm and free poppet for excellent sensitivity and stable outlet pressure. The reset spring configuration maintains stable and low outlet pressure, even under high flow conditions, making these regulators ideal for various gas media with high flow.

Features


- ⦿ Large diameter diaphragm offers enhanced pressure sensitivity.
- ⦿ Metal-to-metal seal between valve body and diaphragm provides ensured sealing performance.
- ⦿ Reinforced diaphragm design extends diaphragm service life.
- ⦿ The bonnet includes a captured vent port, allowing media to be vented to a designated location in the event of accidental diaphragm rupture.

Technical Data

Port Size		3/4" or 1"	
Max. Working Pressure		500 psig (34.5 bar)	
Outlet Pressure Range		0 ~ 15 psig (0 ~ 1.0 bar)	
		0 ~ 30 psig (0 ~ 2.1 bar)	
		0 ~ 75 psig (0 ~ 5.2 bar)	
		0 ~150 psig (0 ~ 10.3 bar)	
Flow Coefficient (Cv)		1.8	
Working Temperature		-40 ~ 165 °F (-40 ~ 74 °C)	
SPE (Supply Pressure Effect)		4.5 psig per 100 psig source pressure change	
Leak Rate	External	Inboard	$\leq 2 \times 10^{-10}$ std cm ³ /s (Helium)
		Outboard	$\leq 1 \times 10^{-9}$ std cm ³ /s (Helium)
	Internal		Bubble tight



Flow Data

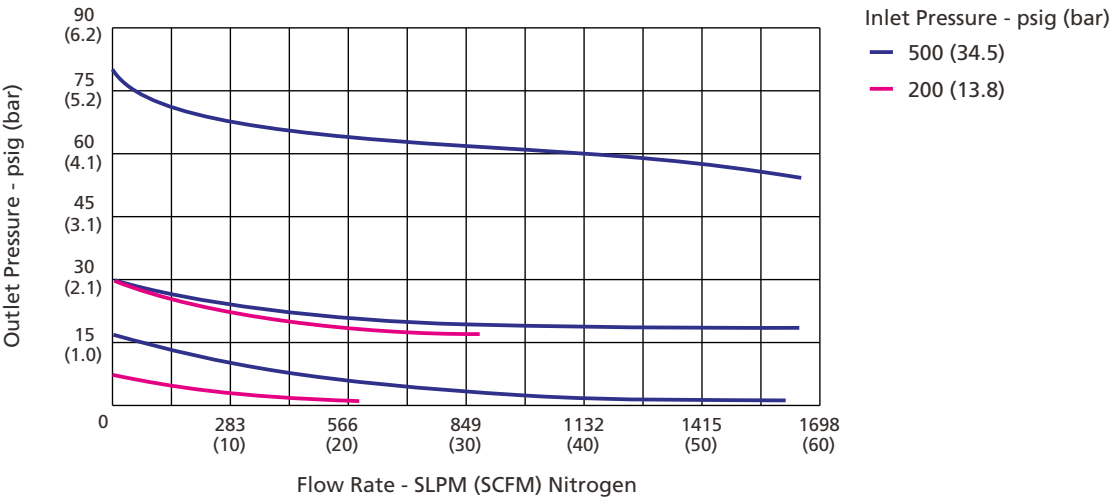


Process Specification

Item	Process Specification	
	Special Cleaning and Packaging Process (FC-02)	Ultra High Purity Process (FC-03)
Material	316L SS, Brass	316L SS
Wetted Surface Roughness	Face Seal Connection or Butt Weld Connection: Ra 20 μin. (0.5 μm) Threaded Connection or Tube Fitting Connection: Ra 32 μin. (0.8 μm)	Face Seal Connection and Butt Weld Connection: Ra 10 μin. (0.25 μm)
Polishing Process	Machine Finished	Electropolished
Assembly Environment	In specially cleaned areas	ISO Class 4 (FS 209E Class 10 equivalent) cleanroom
Packaging	Double bagged	Double bagged in cleanroom


Note: For products with higher surface finish, please contact FITOK.

Major Materials of Construction

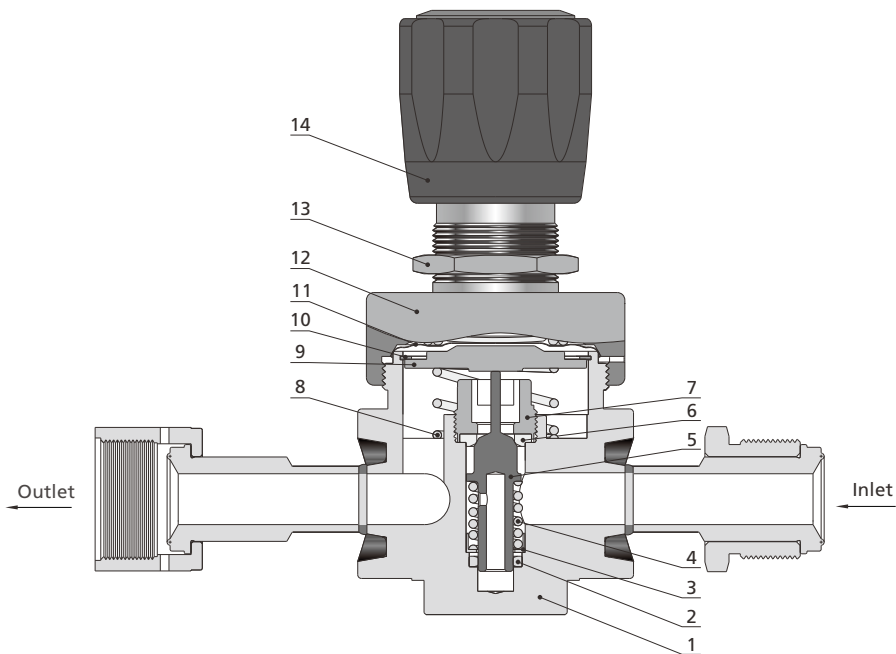

Item	Component	Material/Specification
1	Body	316L SS or Brass
2	Guide Ring	PTFE/ASTM D1710
3	Spring Seat	316L SS
4	Poppet Spring	316L SS or Alloy X-750
5	Lift Poppet	316L SS
6	Seat	PCTFE/ASTM D1430 or PTFE/ASTM D1710
7	Seat Retainer	316L SS
8	Reset Spring	316 SS
9	Buffer Plate	316L SS
10	Light-Duty Retainer	316L SS
11	Diaphragm	316L SS/ASTM A240
12	Bonnet	304 SS/ASTM A479 or Brass
13	Panel Nut	304 SS/ASTM A479
14	Handle	ABS

Porting Configurations

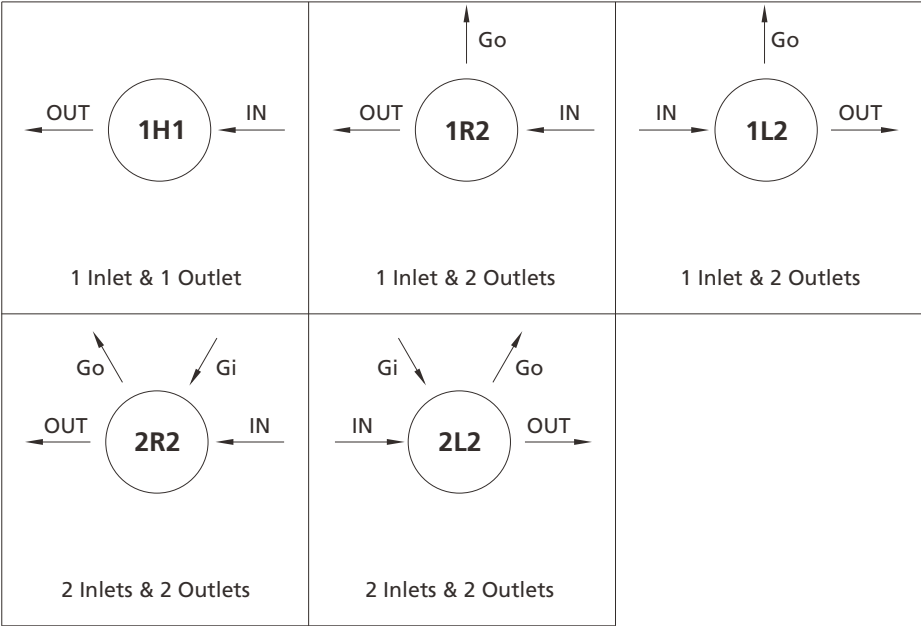


Porting Configuration Symbol

IN	OUT	Gi	Go
Inlet	Outlet	Inlet Pressure Gauge Port	Outlet Pressure Gauge Port



- Notes:
- 1. IN and OUT are the inlet and outlet ports for connecting the valve to the system. Ports other than IN and OUT should not be used for system connections.
 - 2. Porting configuration is viewed from the top.

Dimensions


Dimensions, in inches (millimeters), are for reference only.

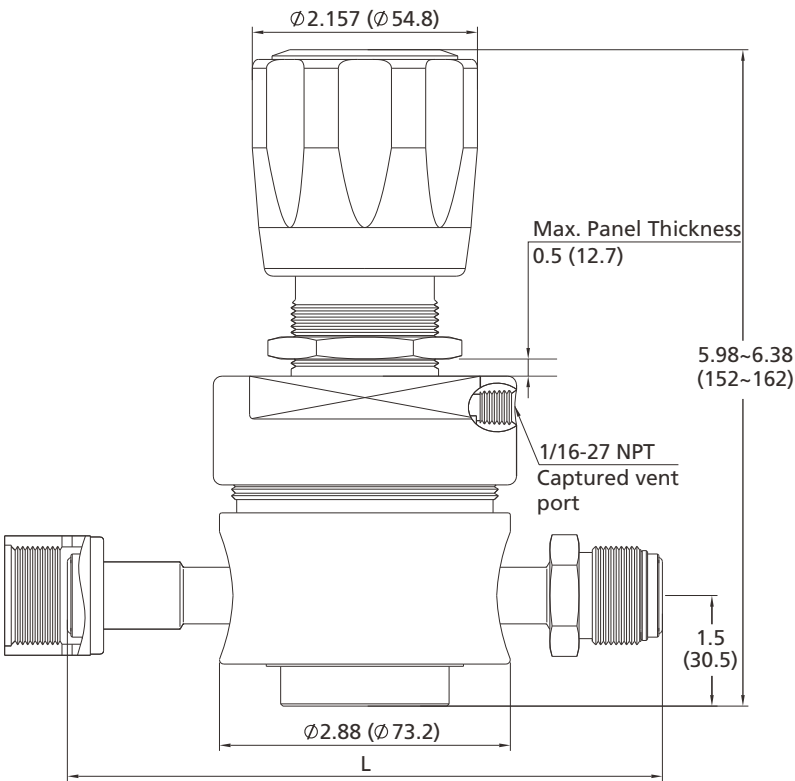

Panel Mounting Cut-Out

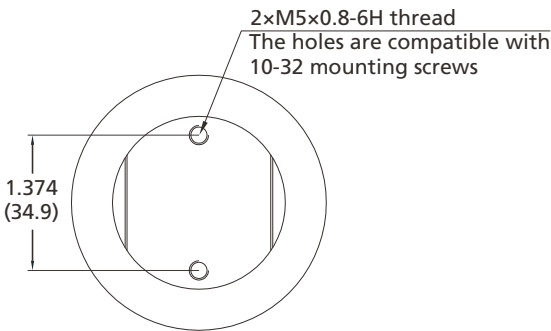


Bottom Mounting Screw Holes

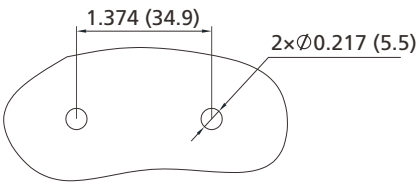

Bottom Mounting Cut-Outs

Connection Designator	Connection Type and Size	Dimension, in.(mm)
		L
FL12	3/4" Tube Fitting	5.98 (152)
FNS12	3/4" Female NPT	2.88 (73.2)
FFR12	3/4" Rotatable Female FR Metal Gasket Face Seal Fitting	6.81 (173)
RFR12	3/4" Rotatable Male FR Metal Gasket Face Seal Fitting	
FL16	1" Tube Fitting	6.42 (163)
FFR16	1" Rotatable Female FR Metal Gasket Face Seal Fitting	7.21 (183)
RFR16	1" Rotatable Male FR Metal Gasket Face Seal Fitting	

Ordering Number Description

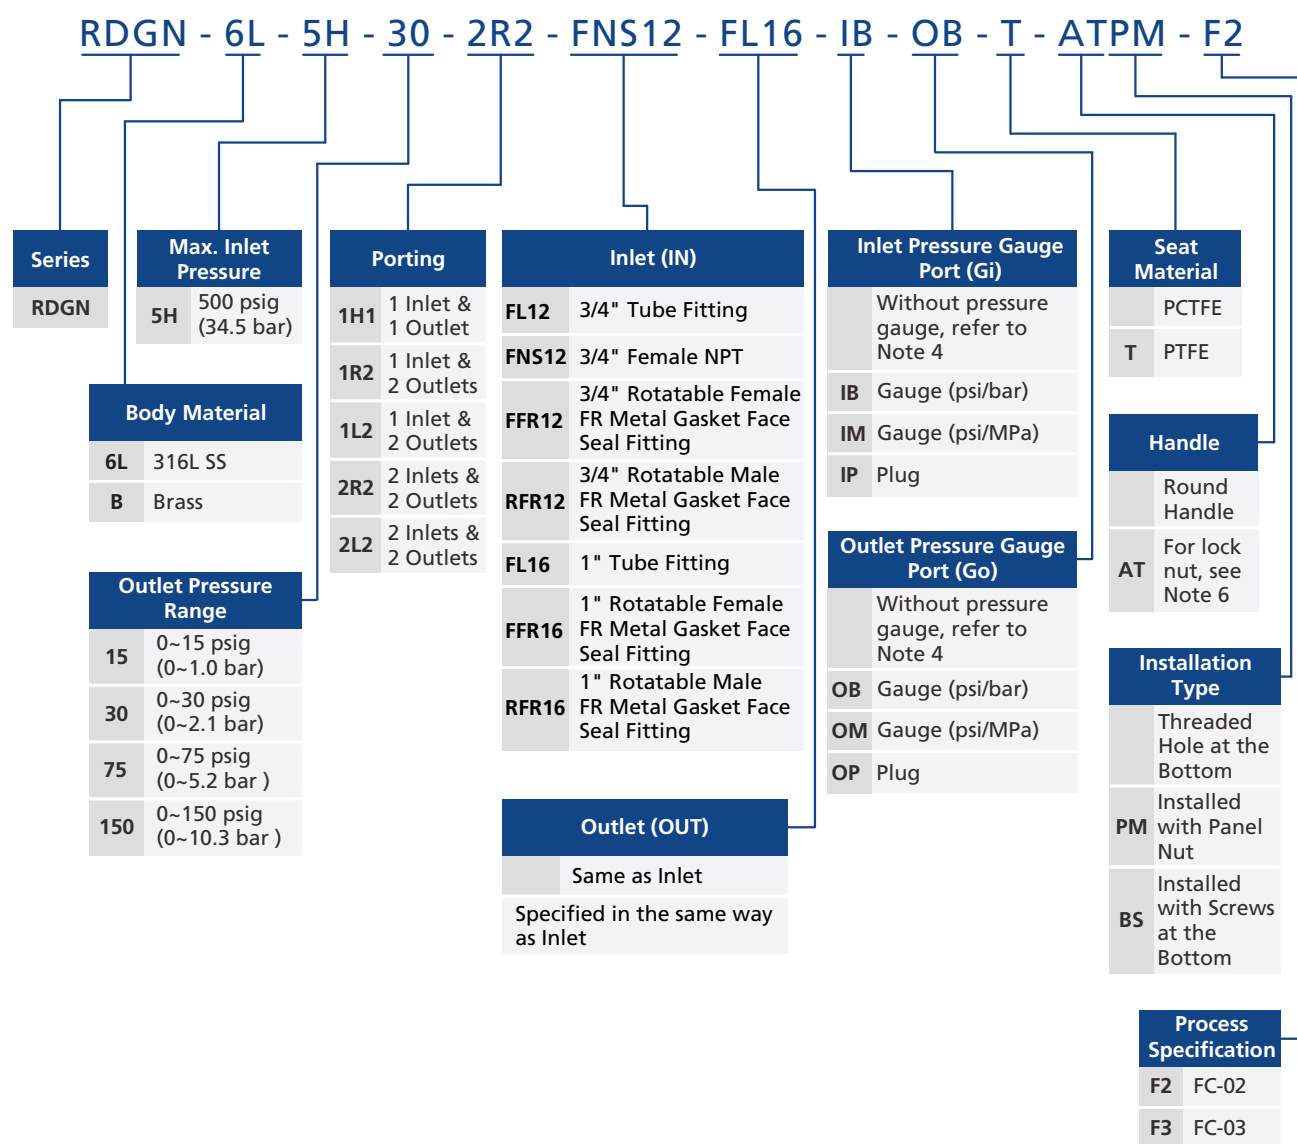

Notes:

- "Ordering Number Description" is a reference to understand the combination rules of FITOK product part number. Not all combinations are available.
- For Metal Gasket Face Seal Fitting ports, the port and body are orbital-welded integral structure by default.
- For NPT or Fractional Tube Fitting ports, the body port is 3/4" Female NPT by default. Other options are adapted from Male NPT.
- When choosing NPT or Fractional Tube Fitting for inlet and outlet, gauge ports (Gi, Go) are 1/4" Female NPT. When choosing Metal Gasket Face Seal Fitting for inlet and outlet, gauge ports (Gi, Go) are 1/4" Rotatable Male FR Metal Gasket Face Seal Fitting.
- For the outlet relief valve, the set pressure is factory-set to 1.05-1.1 times the maximum outlet pressure by default, FITOK can preset the specified set pressure according to customer requirements. Please specify the desired set pressure when placing your order.
- Lock nut (AT): The metal lock nut construction is designed to prevent accidental pressure adjustments. FITOK can set the specified outlet pressure based on customer requirements; simply include this information in the remarks when placing an order. If the outlet pressure is not specified, customers will need to adjust and fix it themselves.

Steam Heated Regulators

RDVC Series

Introduction

RDVC Series Steam Heated Regulators are designed to heat fluids for analyzer systems, primarily to preheat fluids and prevent gas condensation or liquid evaporation. The unique design allows for easy disassembly, cleaning, and replacement of heat transfer components, reducing maintenance time and costs.

Features


- Low internal volume and high flow rate.
- Convoluted diaphragm for improved regulation precision and extended service life.
- Reinforced diaphragm improves sealing performance and extends service life.
- Wetted metal components comply with NACE MR0175.

Technical Data

Port Size	Media Inlet and Outlet	1/8" to 3/8", 6 mm or 8 mm
	Steam Supply Port	3/8"
Max. Working Pressure	Media	3600 psig (248 bar)
	Steam	600 psig (41.4 bar)
Outlet Pressure Range		0 ~ 25 psig (0 ~ 1.7 bar)
		0 ~ 50 psig (0 ~ 3.4 bar)
		0 ~ 100 psig (0 ~ 6.9 bar)
		0 ~ 250 psig (0 ~ 17.2 bar)
		0 ~ 500 psig (0 ~ 34.4 bar)
Flow Coefficient (Cv)		0.06
Working Temperature	Media	-40 ~ 500 °F (-40 ~ 260 °C)
	Steam	Max. 500 °F (260 °C)
Leak Rate (Helium)	Internal	≤1×10 ⁻⁷ std cm ³ /s
	External	≤1×10 ⁻⁷ std cm ³ /s



Flow Data

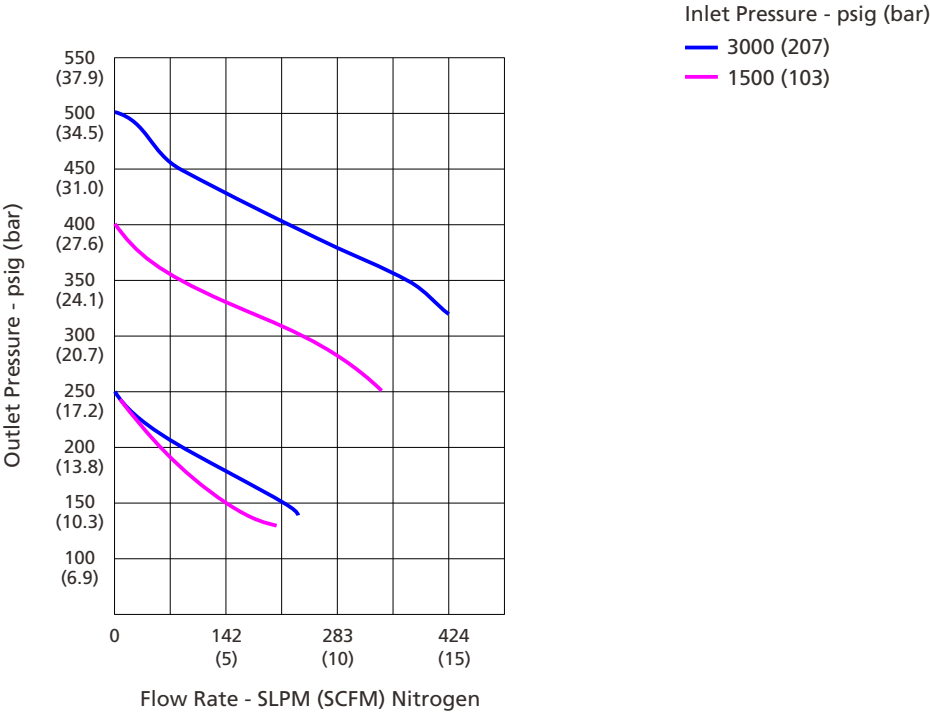


Process Specification


Item	Process Specification	Special Cleaning and Packaging Process (FC-02)
Material		316L SS, Alloy 400
Wetted Surface Roughness		Ra 32 μin. (0.8 μm)
Polishing Process		Machine Finished
Assembly Environment		In specially cleaned areas
Packaging		Double bagged

Major Materials of Construction

Item	Component	Material/Specification
1	Diaphragm	Alloy C-22
2	Seat Retainer	316L SS or Alloy 400
3	Lift Poppet	Alloy C-276/ASTM B574
4	Seat	Polyimide
5	Poppet Spring	Alloy X-750
6	Shutoff Bolt	316L SS/ASTM A479 or Alloy 400
7	Body	316L SS/ASTM A479 or Alloy 400
8	Stream Heater	316L SS/ASTM A479 or Alloy 400

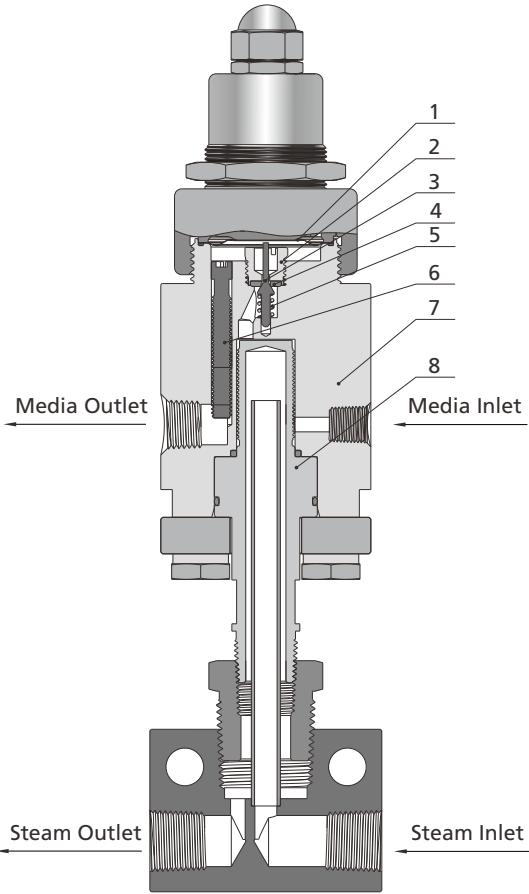

Porting Configurations

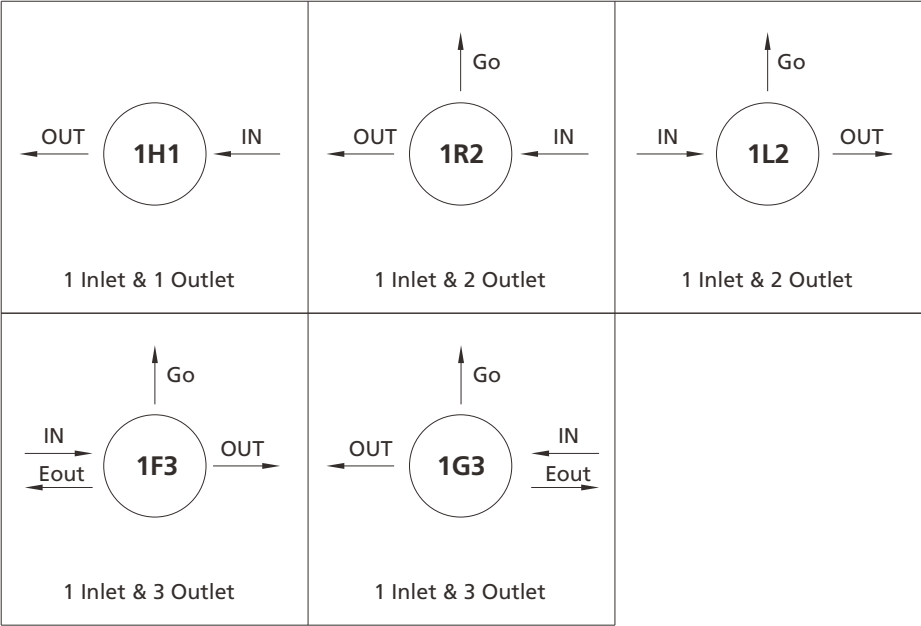

Porting Configuration Symbol


IN	OUT	Go	Eout
Inlet	Outlet	Outlet Pressure Gauge Port	Auxiliary Outlet

- Notes:
1. IN and OUT are the inlet and outlet ports for connecting the valve to the system. Ports other than IN and OUT should not be used for system connections.
 2. Porting configuration is viewed from the top.


Dimensions

Dimensions, in inches (millimeters), are for reference only.

Pressure Regulator with 1 Inlet & 3 Outlets (1F3)

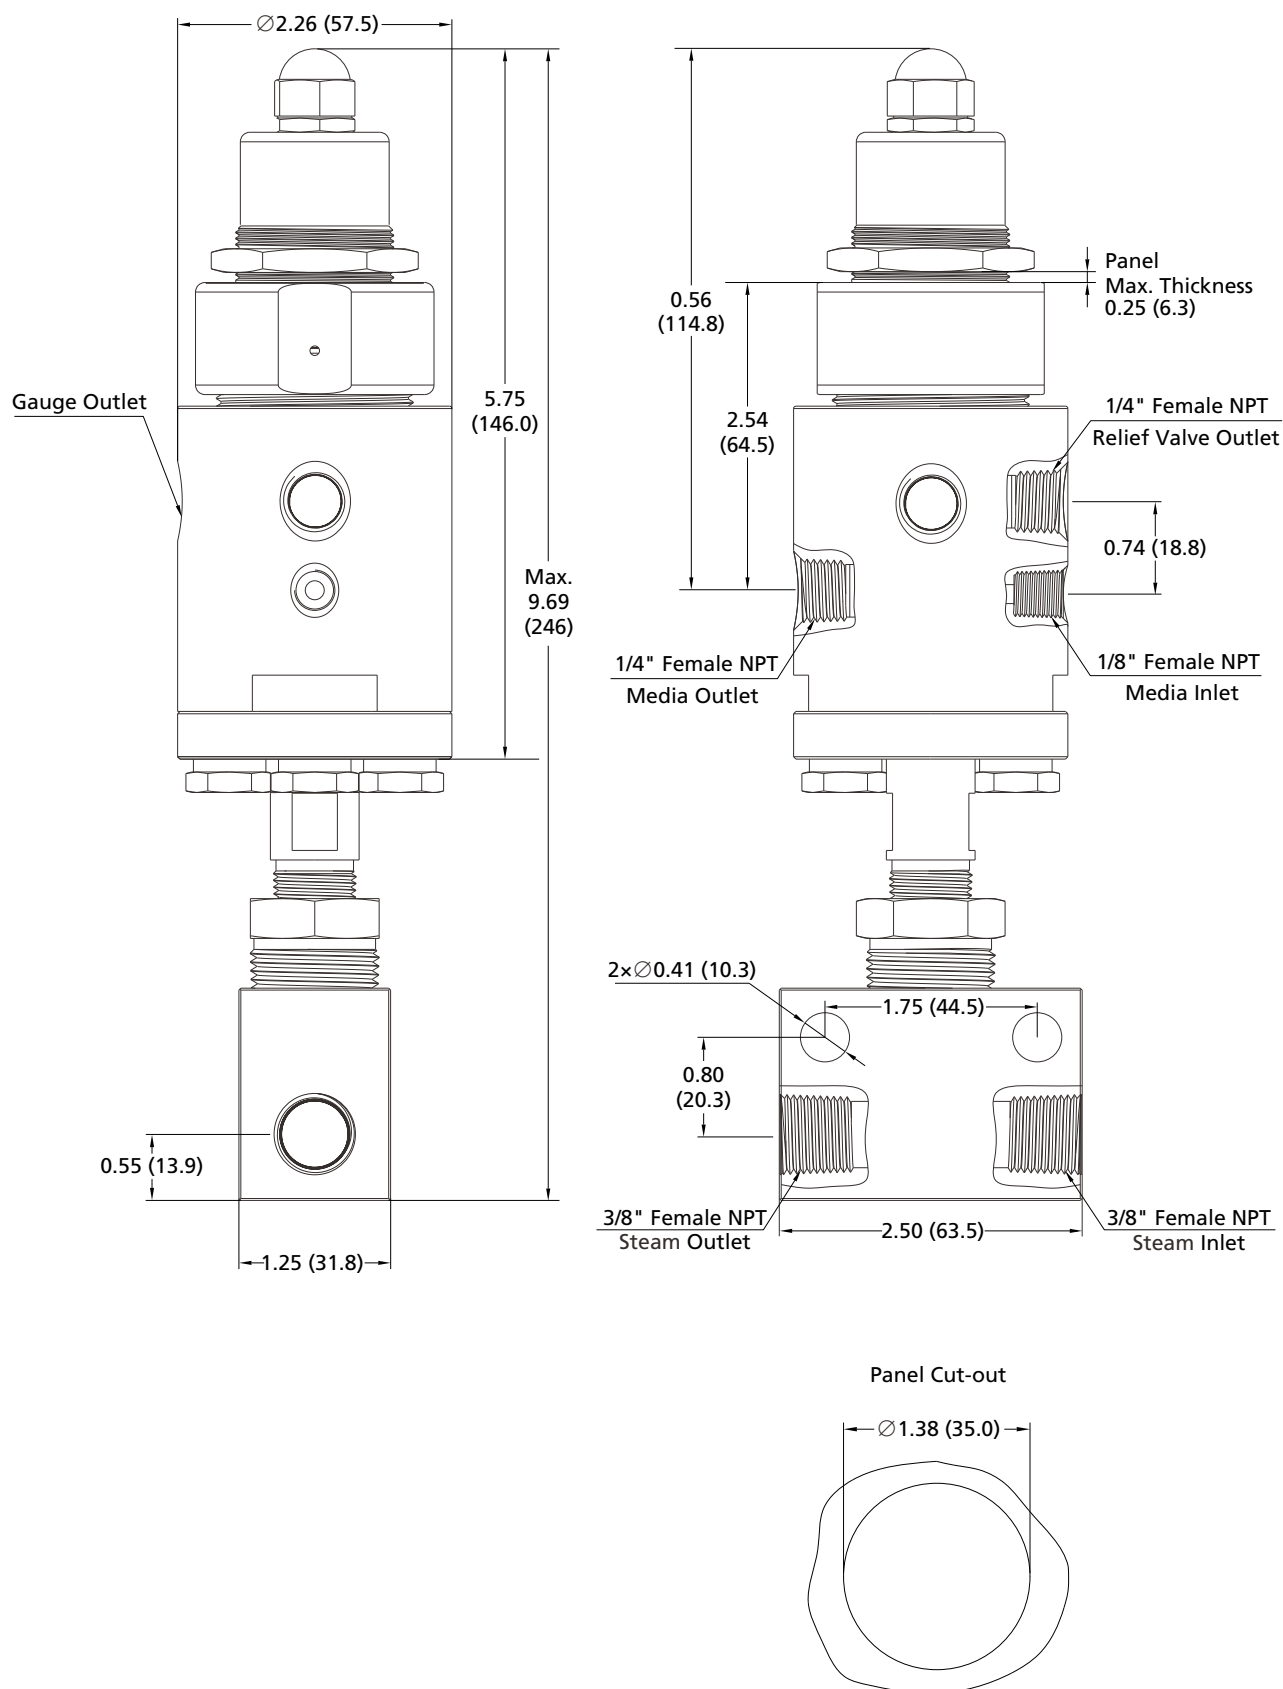

Ordering Number Description

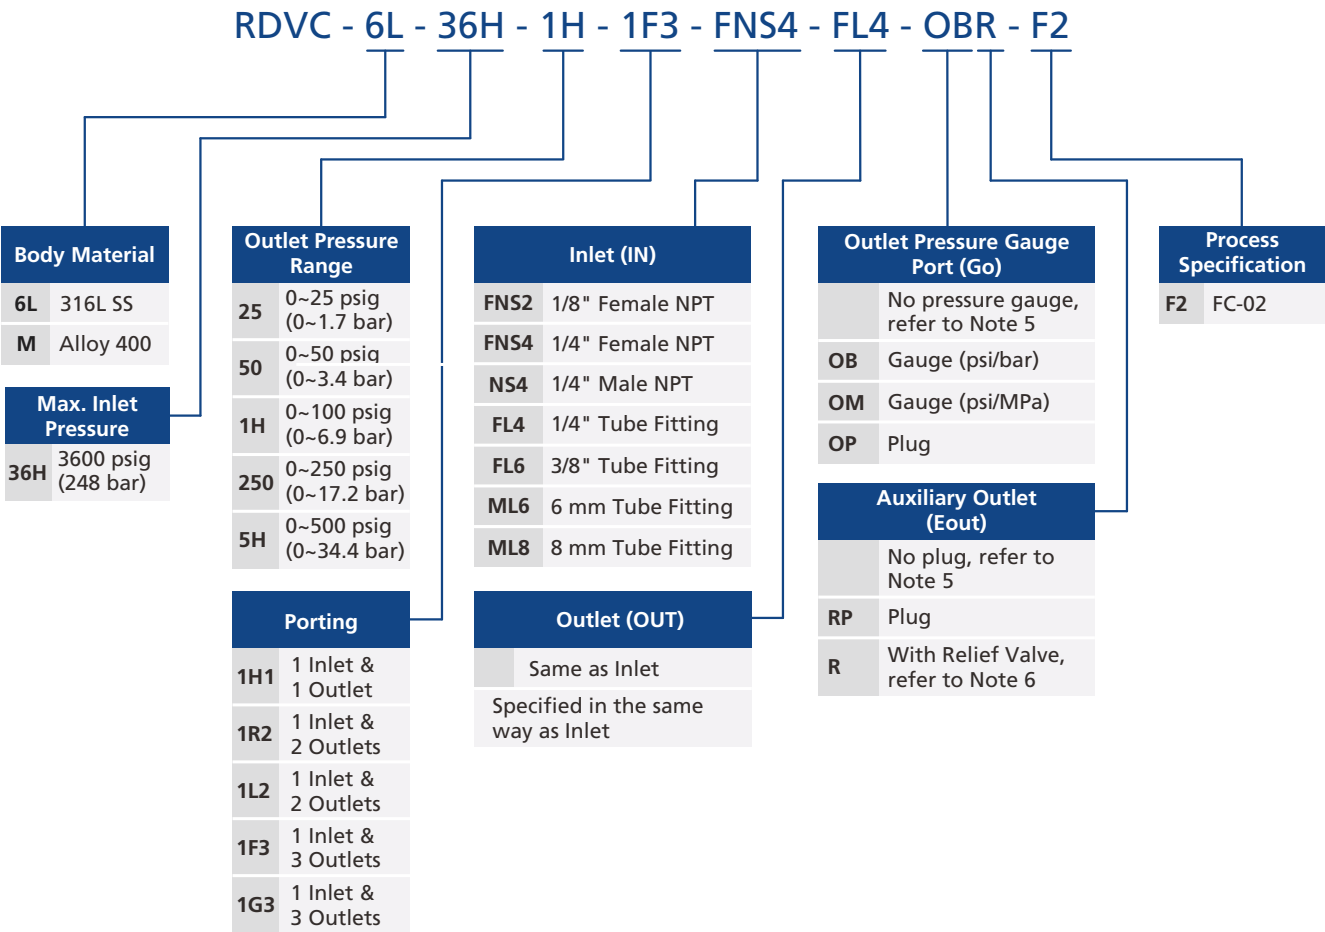

- Notes:
- 1. "Ordering Number Description" is a reference to understanding the combination rules of FITOK product part numbers. Not all combinations are available. Should you have any questions, please contact FITOK Group or our authorized distributors.
 - 2. When selecting pressure gauge and relief valve accessories, the medium working temperature must not exceed the temperature range of the accessories.
 - 3. For "1F3" or "1G3" port configurations, the inlet must be 1/8" female NPT only.
 - 4. FITOK can set the specified outlet pressure based on customer requirements; simply include this information in the remarks when placing an order. If the outlet pressure is not specified, customers will need to adjust and fix it themselves.
 - 5. When choosing NPT or Metric/Fractional Tube Fitting connection for the inlet and outlet, the body inlet port is 1/8" Female NPT by default, the body outlet port is 1/4" Female NPT by default, and the gauge port (Go) and auxiliary outlet (Eout) are also 1/4" Female NPT. Other options are adapted from Male NPT.
 - 6. For the outlet relief valve, the set pressure is factory-set to 1.05-1.1 times the maximum outlet pressure by default, FITOK can preset the specified set pressure according to customer requirements. Please specify the desired set pressure when placing your order.

General Piston Regulators

RPGC Series

Introduction

RPGC Series General Piston Regulators feature a single-stage pressure reduction design with a piston sensing mechanism that is more resistant to damage caused by pressure spikes and offers a broad outlet pressure range. With eight port configuration options, these regulators accommodate a variety of gas and liquid applications.

Features


- Built-in 40 µm inlet filter for cleanliness and extended service life.
- Optional self-venting feature.
- The bonnet includes a captured vent port, allowing media to be vented to a designated location in the event of accidental O-ring failure.

Technical Data

Port Size		1/4", 3/8", 6 mm or 8 mm	
Max. Working Pressure		6000 psig (414 bar)	
Outlet Pressure Range		0 ~ 250 psig (0 ~ 17.2 bar)	
		0 ~ 500 psig (0 ~ 34.5 bar)	
		0 ~ 750 psig (0 ~ 51.7 bar)	
		0 ~ 1000 psig (0 ~ 69.0 bar)	
		0 ~ 1500 psig (0 ~ 103 bar)	
		0 ~ 2500 psig (0 ~ 172 bar)	
Flow Coefficient (Cv)		Non-self-venting	0.06
		Self-venting	0.1
Working Temperature		FKM	-4 ~ 165 °F (-20 ~ 74 °C)
		FFKM	1.4 ~ 165 °F (-17 ~ 74 °C)
SPE (Supply Pressure Effect)	Max. Outlet Pressure: 250, 500 psig	1.3 psig per 100 psig source pressure change	
	Max. Outlet Pressure: 750, 1000 psig	1.9 psig per 100 psig source pressure change	
	Max. Outlet Pressure: 1500, 2000 psig	4.5 psig per 100 psig source pressure change	
Leak Rate		External	Bubble tight
		Internal	Bubble tight




Flow Data

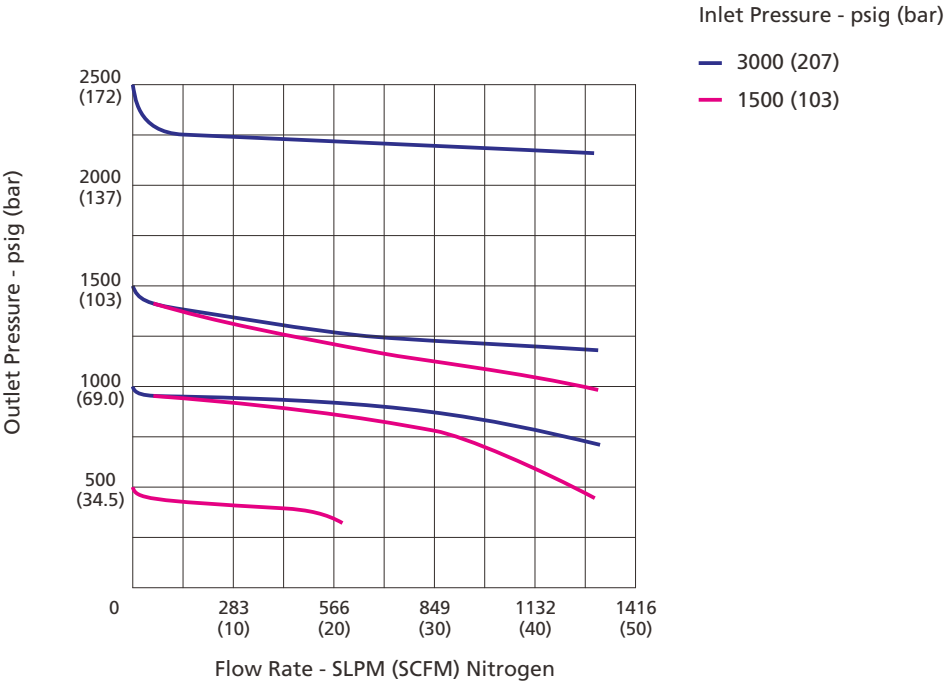

Process Specification

Process Specification	
Item	Special Cleaning and Packaging Process (FC-02)
Material	316L SS, Brass (Nickle-Plated)
Wetted Surface Roughness	Ra 32 μin. (0.8 μm)
Polishing Process	Machine Finished
Assembly Environment	In specially cleaned areas
Packaging	Double bagged




Major Materials of Construction

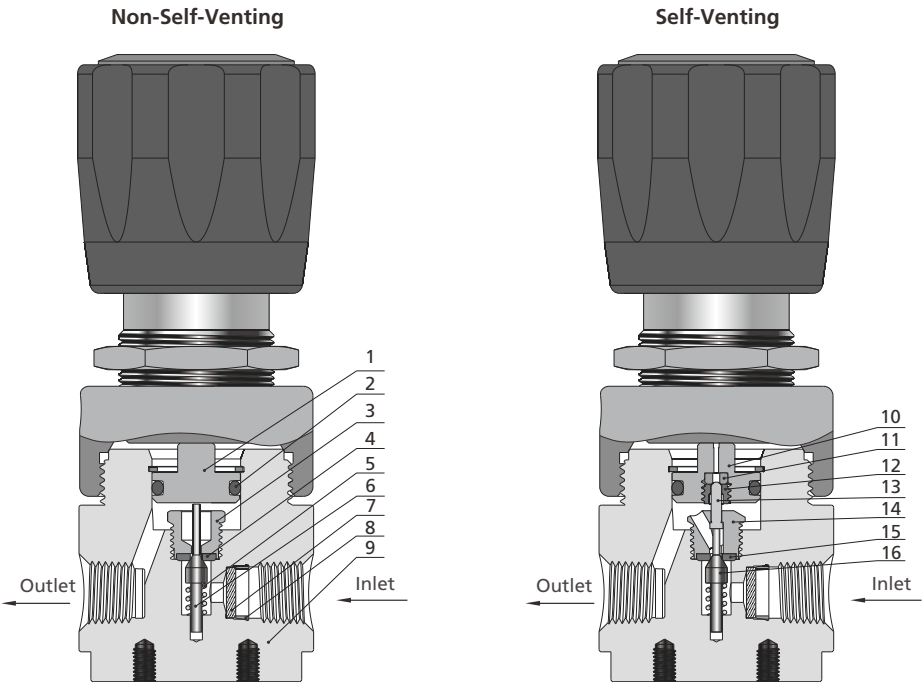



Item	Component	Material/Specification
1	Piston	316L SS/ASTM A276
2	O-Ring	FKM or FFKM
3	Seat Retainer	316L SS/ASTM A479
4	Seat	PCTFE/ASTM D1430
5	Poppet Spring	Alloy
6	Lift Poppet	Alloy C-276/ASTM B574
7	Filter	316L SS
8	Retaining Ring	PTFE/ASTM D1710
9	Body	316L SS/ASTM A479 or Brass (Nickle-Plated)
10	Vent Piston	316L SS/ASTM A479
11	Vent Seat	PEEK
12	Vent Bushing	316L SS/ASTM A479
13	Vent Rod	Alloy C-276/ASTM B574
14	Vent Seat Retainer	316L SS/ASTM A479
15	Seat	PEEK
16	Vent Poppet	Alloy C-276/ASTM B574

Dimensions


Dimensions, in inches (millimeters), are for reference only.

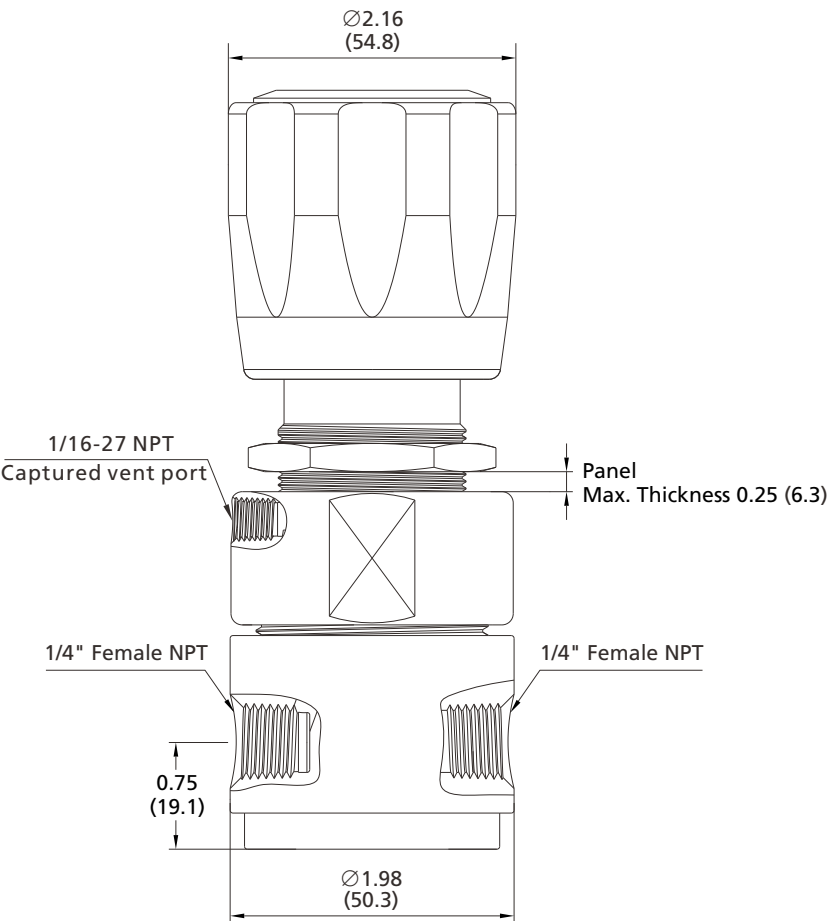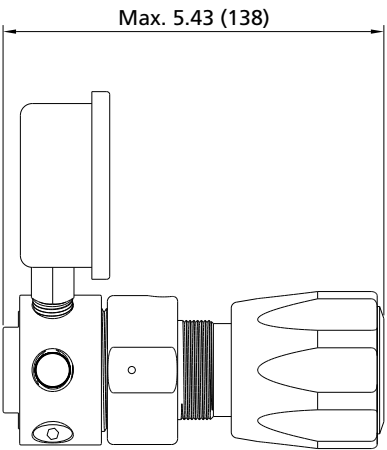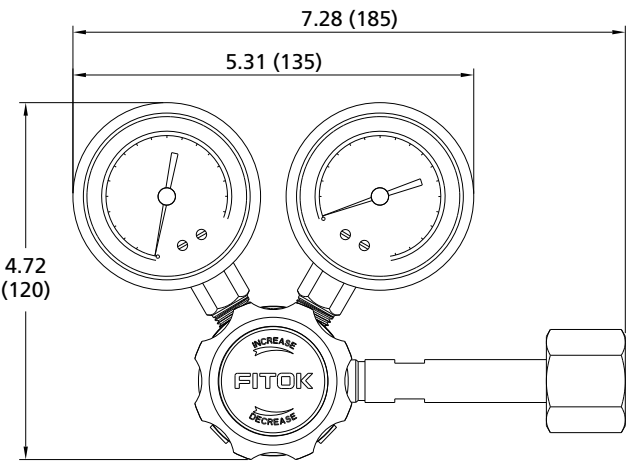


Panel Mounting Cut-Out

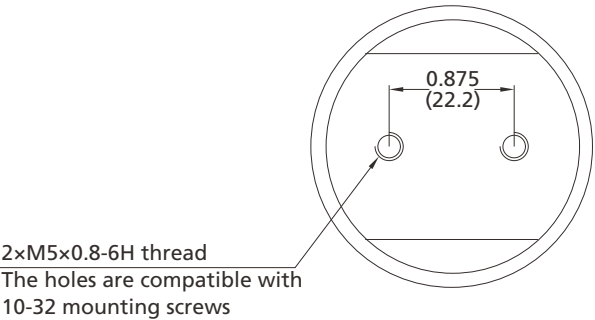

Bottom Mounting Cut-Outs

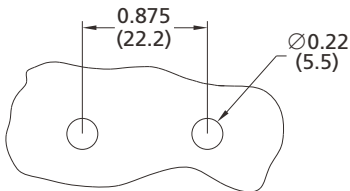

Porting Configurations

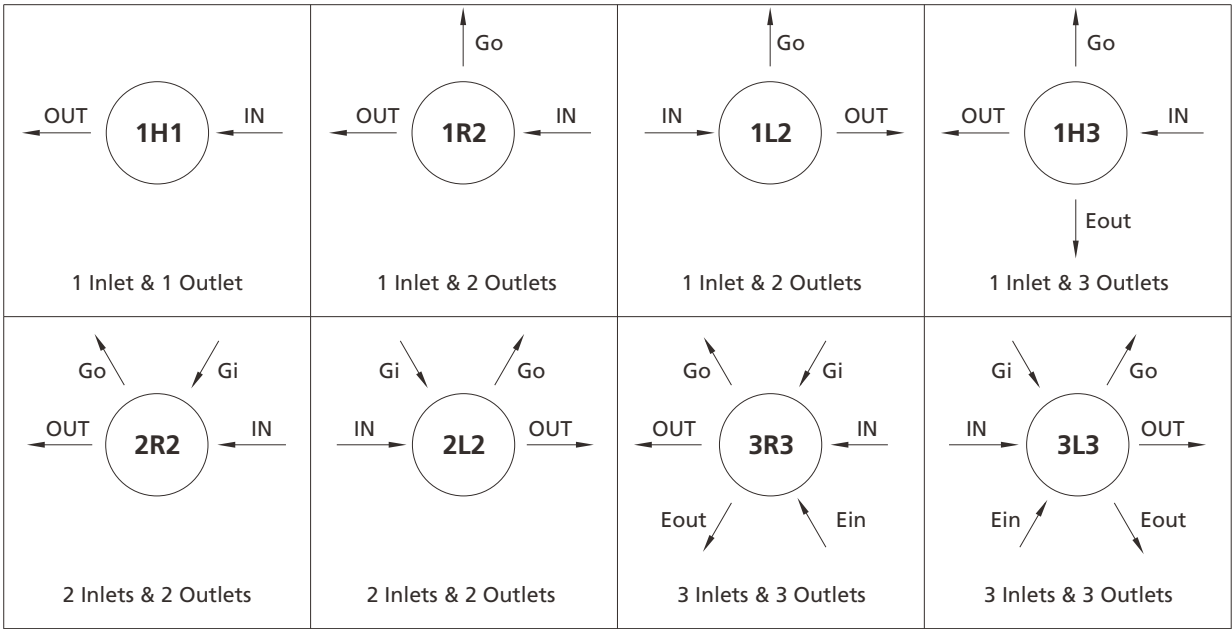


Porting Configuration Symbol

IN	OUT	Gi	Go	Ein	Eout
Inlet	Outlet	Inlet Pressure Gauge Port	Outlet Pressure Gauge Port	Auxiliary Inlet	Auxiliary Outlet

- Notes:
- 1. IN and OUT are the inlet and outlet ports for connecting the valve to the system. Ports other than IN and OUT should not be used for system connections.
 - 2. Porting configuration is viewed from the top.

Ordering Number Description

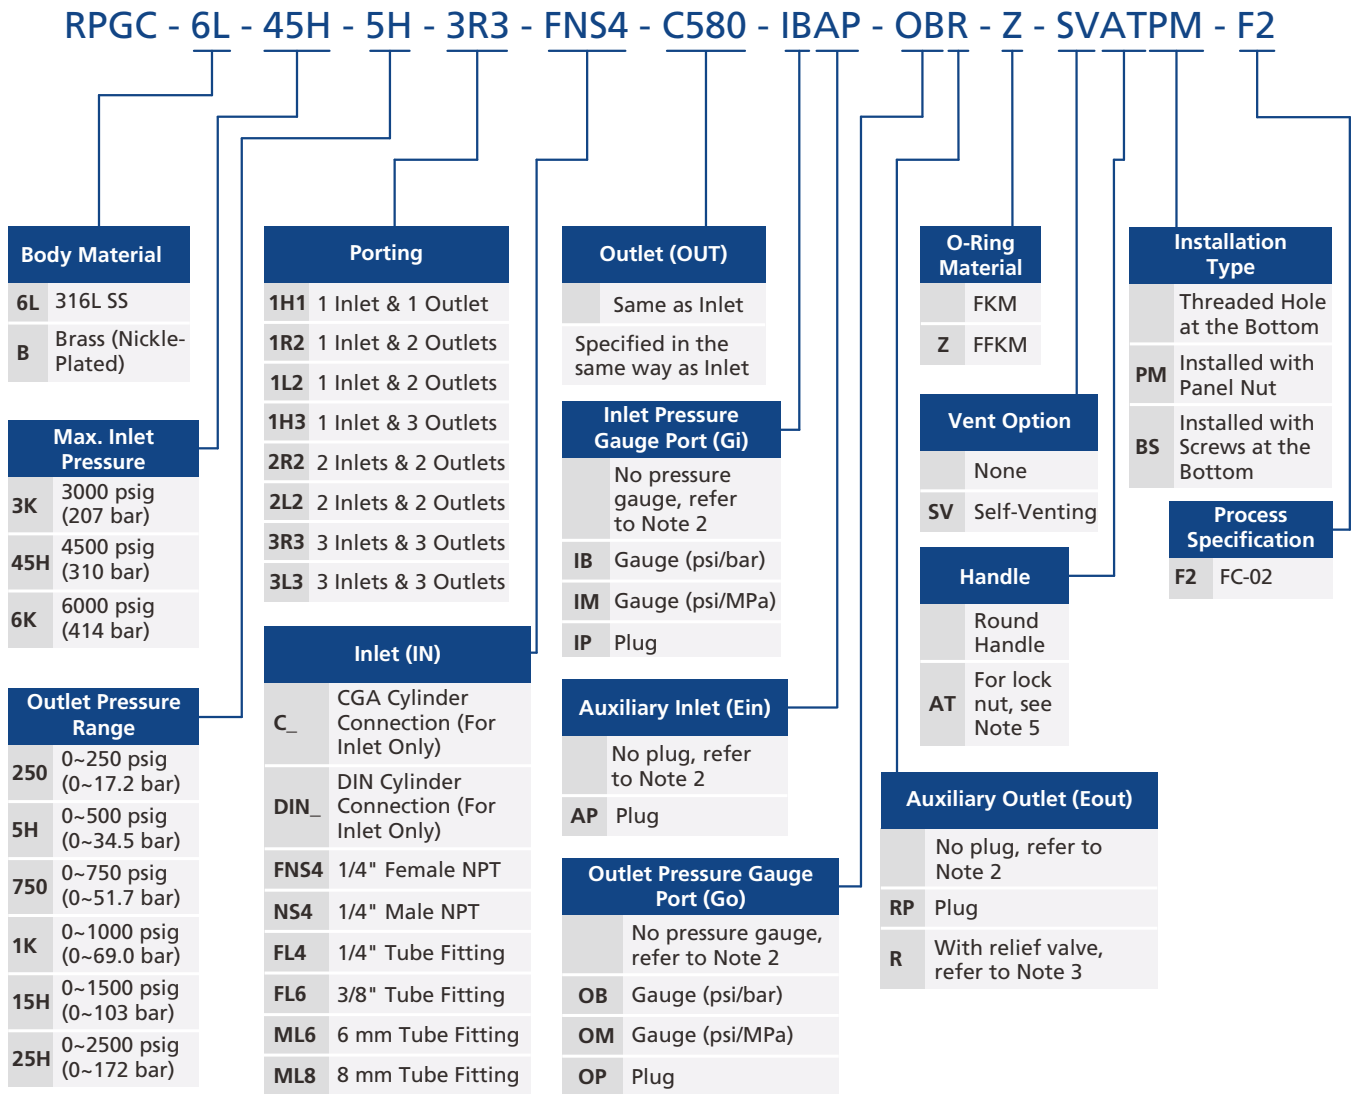

Notes:

- "Ordering Number Description" is a reference to understanding the combination rules of FITOK product part numbers. Not all combinations are available. Should you have any questions, please contact FITOK Group or our authorized distributors.
- When selecting Cylinder Connection, NPT, or Fractional/Metric Tube Fitting for the inlet and outlet, the valve body comes with 1/4" Female NPT inlet and outlet ports by default. The gauge ports (Go, Gi), auxiliary inlet (Ein), and auxiliary outlet (Eout) are also 1/4" Female NPT.
- For the outlet relief valve, the set pressure is factory-set to 1.05-1.1 times the maximum outlet pressure by default, FITOK can preset the specified set pressure according to customer requirements. Please specify the desired set pressure when placing your order.
- For pressure ratings of cylinder connection ports, refer to the Cylinder Connections Catalog.
- Lock nut (AT): The metal lock nut construction is designed to prevent accidental pressure adjustments. FITOK can set the specified outlet pressure based on customer requirements; simply include this information in the remarks when placing an order. If the outlet pressure is not specified, customers will need to adjust and fix it themselves.

Compact Piston Regulators

RPCC Series

Introduction

RPCC Series Compact Piston Regulators feature a single-stage pressure reduction design with a piston sensing mechanism that is more resistant to damage caused by pressure spikes and offers a broad outlet pressure range. These regulators are ideal for high-pressure, low-flow applications.

Features


- Compact and small size design.
- Integrated 40 µm inlet filter for cleanliness and extended service life.
- A variety of O-ring material options for broad media compatibility and temperature ranges.

Technical Data

Port Size			1/4", 3/8", 6 mm or 8 mm
Max. Working Pressure			6000 psig (414 bar)
Outlet Pressure Range			0 ~ 80 psig (0 ~ 5.5 bar)
			0 ~ 140 psig (0 ~ 9.7 bar)
			0 ~ 220 psig (0 ~ 15.2 bar)
			0 ~ 700 psig (0 ~ 48.3 bar)
			0 ~ 1200 psig (0 ~ 82.8 bar)
			0 ~ 1800 psig (0 ~ 124 bar)
Flow Coefficient (Cv)			0.06
Working Temperature		O-Ring	NBR: -30 ~ 165°F (-34 ~ 74°C)
			FKM: -4 ~ 165°F (-20 ~ 74°C)
			FFKM: 1.4 ~ 400°F (-17 ~ 204°C)
			EPDM: -30 ~ 300°F (-34 ~ 149°C)
		Seat	PCTFE: -30 ~ 165°F (-34 ~ 74°C)
			PEEK: -30 ~ 400°F (-34 ~ 204°C)
SPE (Supply Pressure Effect)	Outlet Pressure ≤ 220 psig	0.6 psig per 100 psig source pressure change	
	Outlet Pressure > 220 psig	4 psig per 100 psig source pressure change	
Leak Rate	External	Bubble tight	
	Internal	Bubble tight	



Flow Data

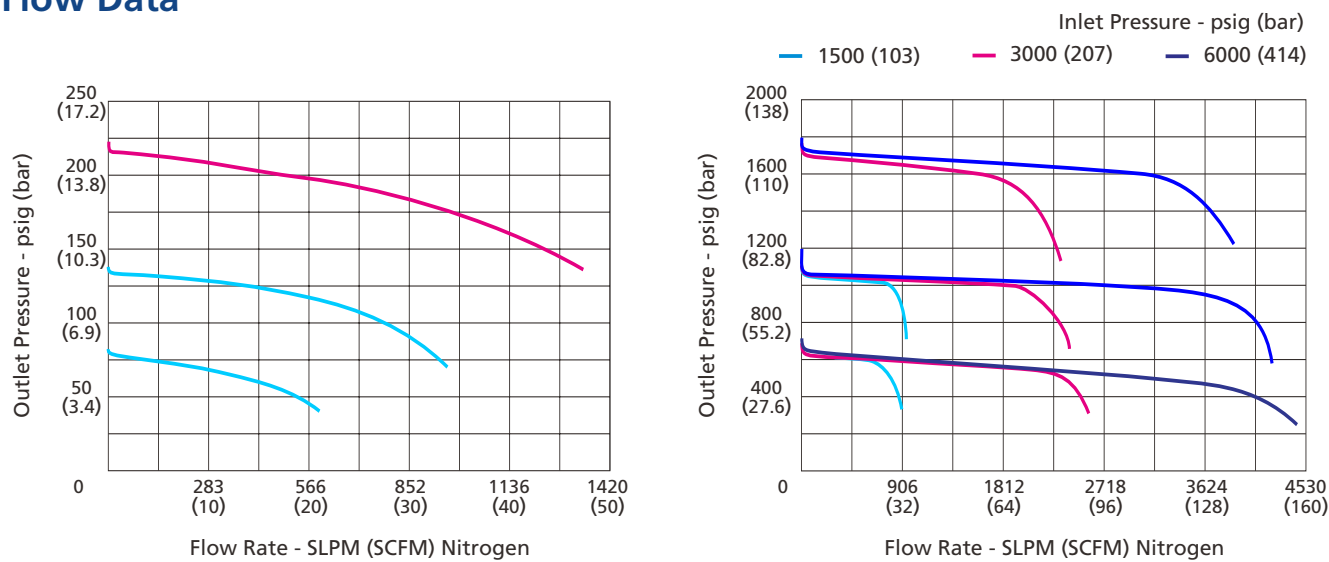


Process Specification

Process Specification	
Item	Special Cleaning and Packaging Process (FC-02)
Material	316L SS, Brass (Nickel-Plated)
Wetted Surface Roughness	Ra 32 μin. (0.8 μm)
Polishing Process	Machine Finished
Assembly Environment	In specially cleaned areas
Packaging	Double bagged


Major Materials of Construction

Large piston configuration: Max. outlet pressure ≤ 220 psig
Small piston configuration: Max. outlet pressure > 220 psig

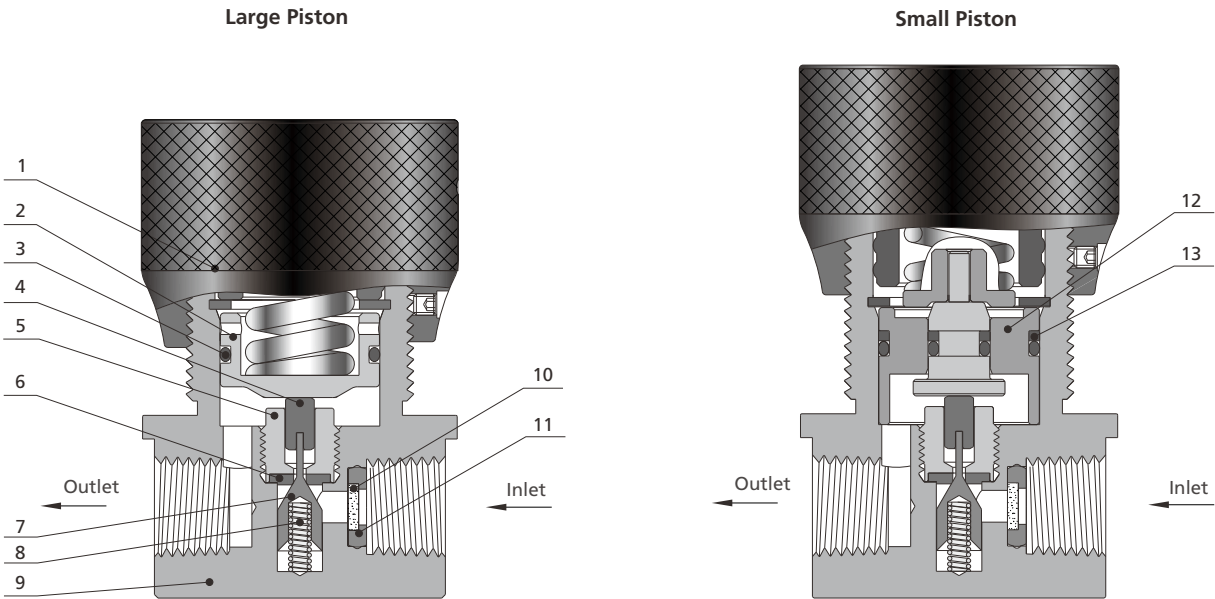

Item	Component	Material/Specification
1	Knob Handle	Aluminium Alloy
2	Piston	316L SS
3	O-Ring	NBR or FKM or FFKM or EPDM
4	Poppet Button	316L SS
5	Seat Retainer	316L SS
6	Seat	PCTFE/ASTM D1430 or PEEK
7	Lift Poppet	316L SS
8	Poppet Spring	316 SS
9	Body	316L SS or Brass (Nickle-Plated)
10	Filter	316L SS
11	Retaining Ring	PTFE/ASTM D1710
12	Piston Ring	316L SS
13	Retaining Ring	PTFE/ASTM D1710 or PEEK

Porting Configurations

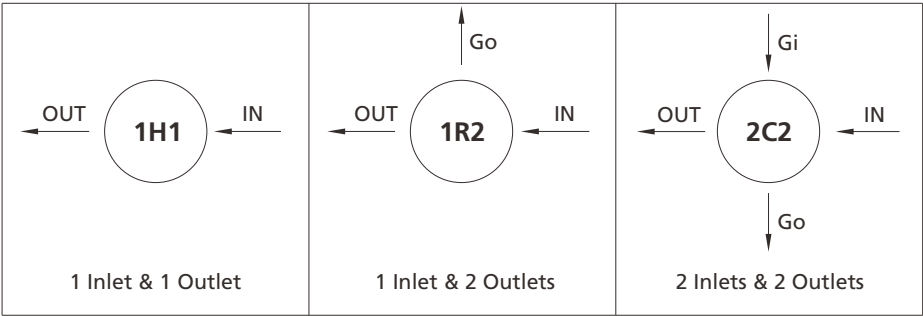


Porting Configuration Symbols

IN	OUT	Gi	Go
Inlet	Outlet	Auxiliary Inlet	Auxiliary Outlet


Notes: 1. IN and OUT are the inlet and outlet ports for connecting the valve to the system.
Ports other than IN and OUT should not be used for system connections.
2. Porting configuration is viewed from the top.

Dimensions

Dimensions, in inches (millimeters), are for reference only.

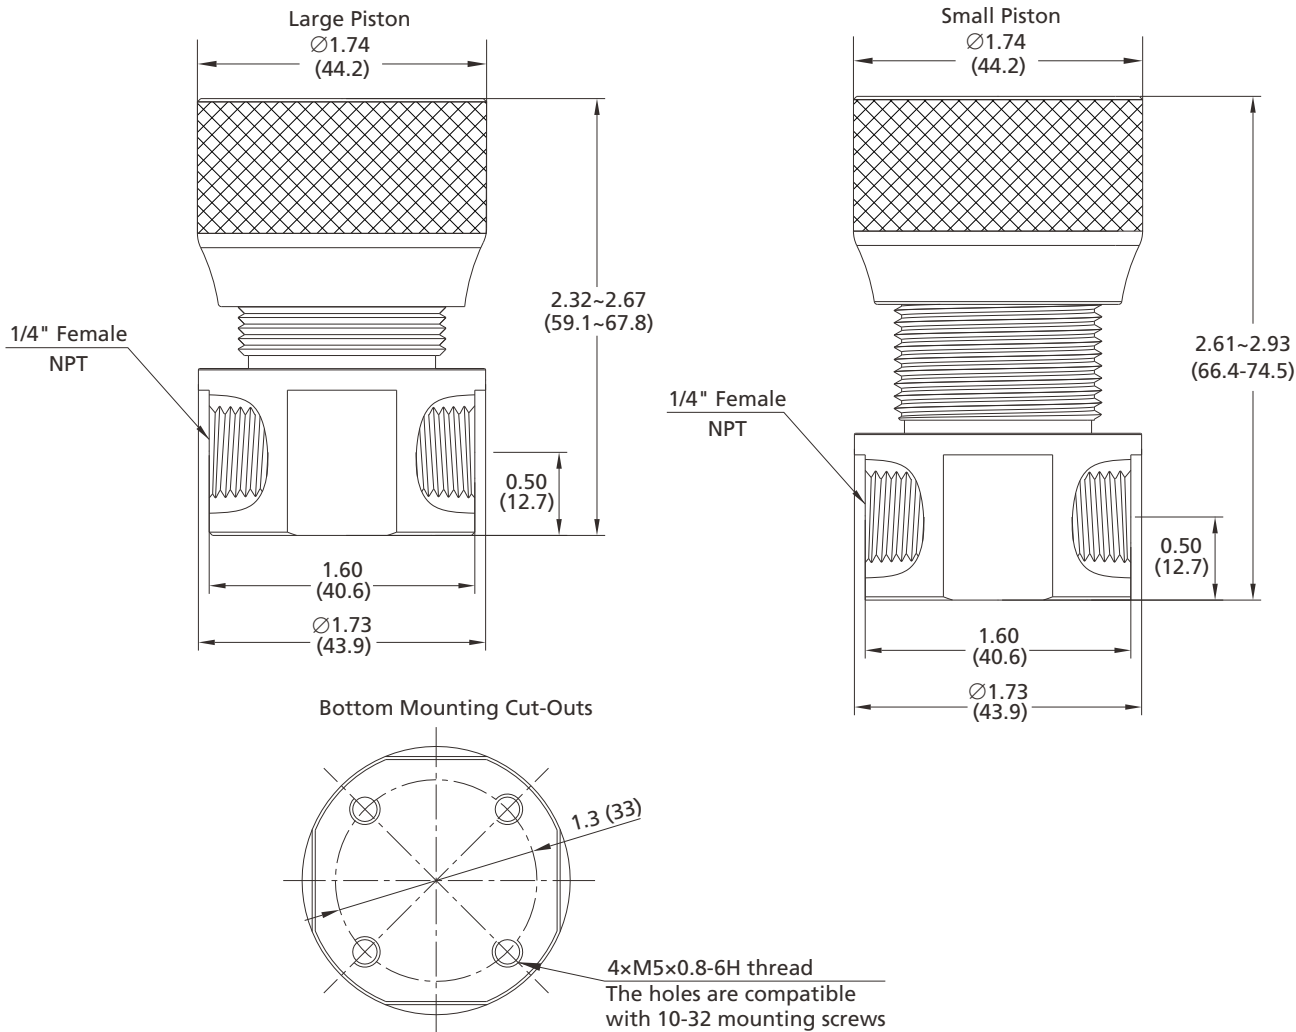

Ordering Number Description

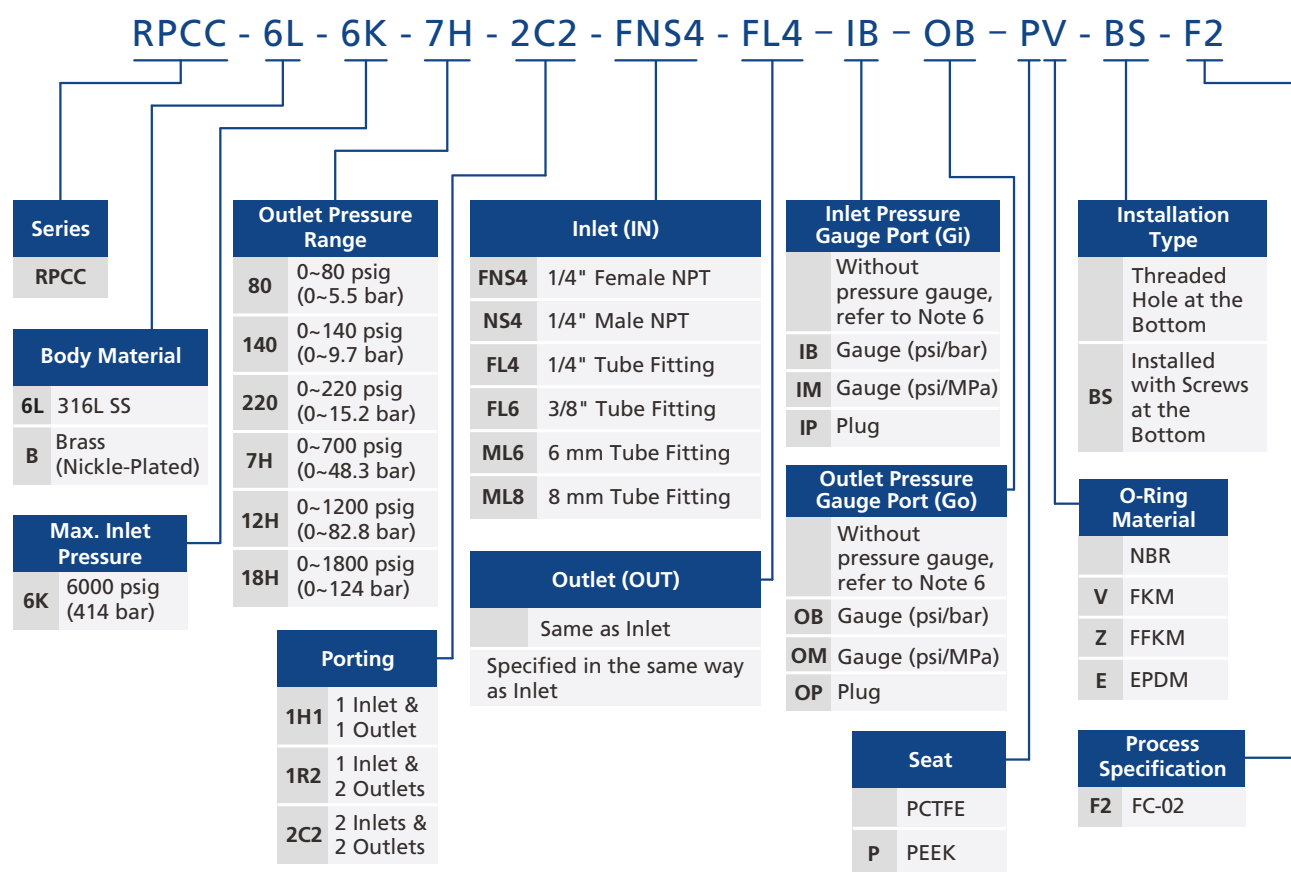

Notes:

- "Ordering Number Description" is a reference to understand the combination rules of FITOK product part number.
Not all combinations are available. Should you have any questions, please contact FITOK Group or our authorized distributors.
- For NPT connection and Metric/Fractional Tube Fitting connection, the body connection is 1/4" Female NPT by default.
Other options are adapted from Male NPT.
- Auxiliary (Gi, Go) are 1/4" Female NPT by default.

High Pressure Piston Regulators

RPGX Series

Introduction

RPGX Series High Pressure Piston Regulators feature a single-stage pressure reduction design with a piston sensing mechanism that is more resistant to damage caused by pressure spikes. These regulators offer a wide outlet pressure range, with a maximum inlet and outlet pressure of up to 10,000 psig. With eight port configuration options, these regulators are ideal for high pressure, low flow applications.

Features


- Built-in 40 µm inlet filter for cleanliness and extended service life.
- Optional self-venting feature.
- Drain port design allows residual liquid media in the downstream pipeline to be vented to a designated location.

Technical Data

Port Size			1/4", 3/8", 6 mm or 8 mm
Max. Working Pressure	316 SS	10000 psig (690 bar)	
	Brass	6000 psig (414 bar)	
Outlet Pressure Range			10 ~ 500 psig (0.69 ~ 34.4 bar)
			15 ~ 800 psig (1.03 ~ 55.2 bar)
			15 ~ 1500 psig (1.03 ~ 103 bar)
			30 ~ 2500 psig (2.1 ~ 172 bar)
			50 ~ 4000 psig (3.4 ~ 276 bar)
			60 ~ 6000 psig (4.1 ~ 414 bar)
			200 ~ 10000 psig (13.8 ~ 690 bar)
Flow Coefficient (Cv)			0.06
Working Temperature	FKM	-4 ~ 165 °F (-20 ~ 74 °C)	
	NBR	-20 ~ 165 °F (-29 ~ 74 °C)	
SPE (Supply Pressure Effect)	Max. Outlet Pressure: 500, 800 psig	1.1 psig per 100 psig source pressure change	
	Max. Outlet Pressure: 1500, 2500 psig	3 psig per 100 psig source pressure change	
	Max. Outlet Pressure: 4000, 6000 psig	9 psig per 100 psig source pressure change	
	Max. Outlet Pressure: 10000 psig	13 psig per 100 psig source pressure change	
Leak Rate		External	Bubble tight
		Internal	Bubble tight



Flow Data

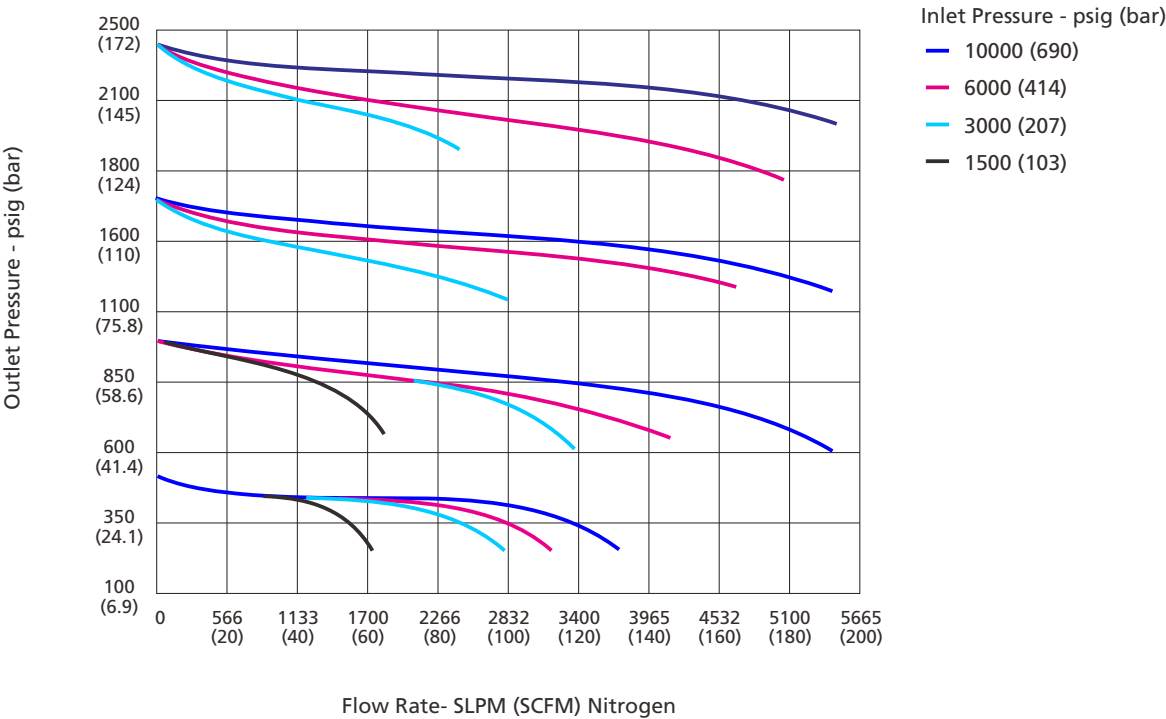

Process Specification


Item	Process Specification	Standard Cleaning and Packaging Process (FC-01)	Special Cleaning and Packaging Process (FC-02)
Material		316 SS, Brass	
Wetted Surface Roughness		Ra 32 μin. (0.8 μm)	
Polishing Process		Machine Finished	
Assembly Environment		At atmosphere	In specially cleaned areas
Packaging		Single bagged	Double bagged

Major Materials of Construction

Gas Control Equipment


Related Products

Technical References

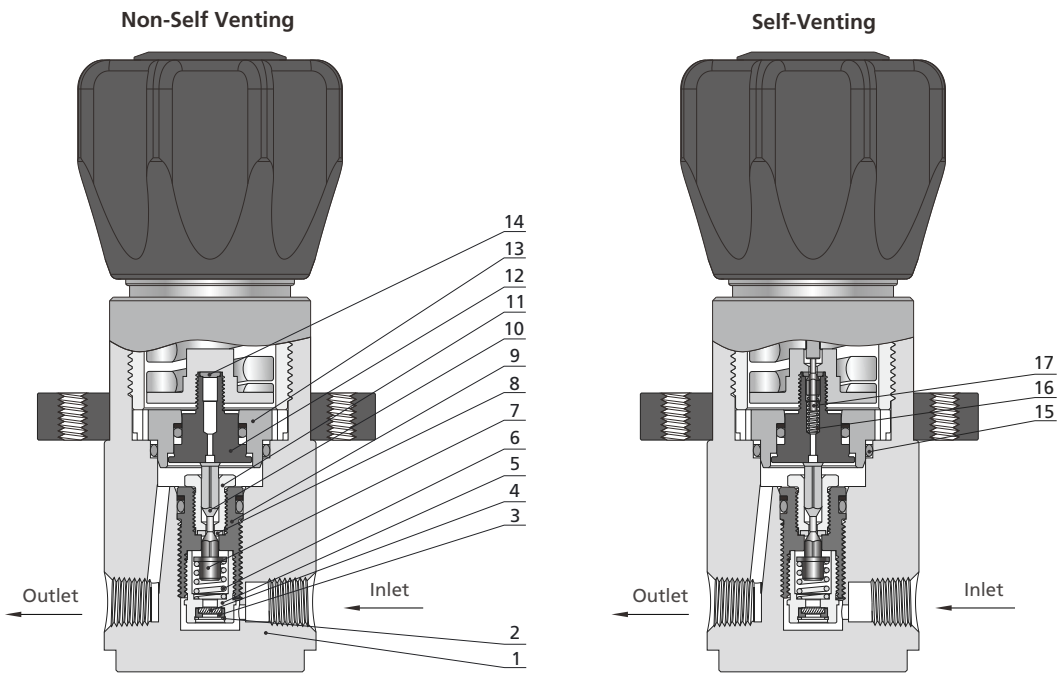

Item	Component	Material/Specification
1	Body	316 SS/A479 or Brass
2	Circlips for Bores	304 SS
3	Retaining Ring	PTFE/ASTM D1710
4	Filter	316L SS
5	Main Poppet Cap	316 SS/ASTM A479
6	Poppet Spring	316 SS/ASTM A313
7	Lift Poppet	S17400/ASTM A564
8	Seat	PEEK
9	Main Poppet	S17400/ASTM A564
10	Poppet Button	S17400/ASTM A564
11	Seat Retainer	S17400/ASTM A564
12	Piston	316 SS/ASTM A479
13	Piston Ring	316 SS/ASTM A479
14	Auxiliary Seat	PEEK
15	O-Ring	FKM or NBR
16	Poppet Spring	316L SS/ASTM A313
17	Auxiliary Poppet	S17400/ASTM A564

Porting Configurations

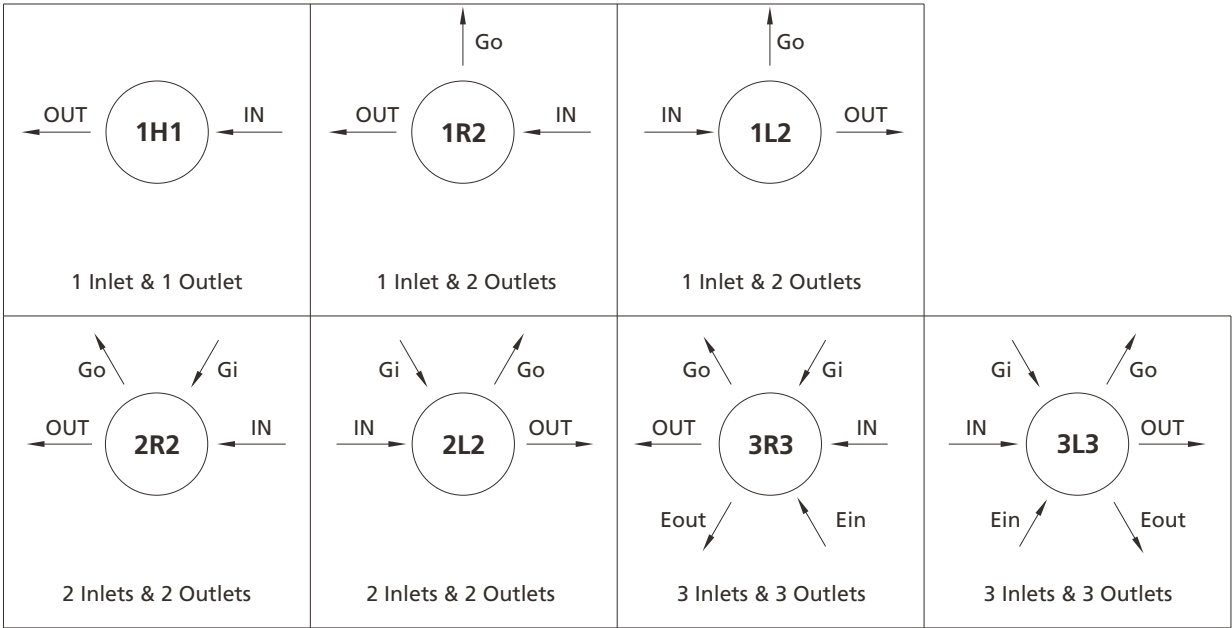


Porting Configuration Symbol

IN	OUT	Gi	Go	Ein	Eout
Inlet	Outlet	Inlet Pressure Gauge Port	Outlet Pressure Gauge Port	Auxiliary Inlet	Auxiliary Outlet


- Notes:
1. IN and OUT are the inlet and outlet ports for connecting the valve to the system. Ports other than IN and OUT should not be used for system connections.
 2. Porting configuration is viewed from the top.

Dimensions


Dimensions, in inches (millimeters), are for reference only.

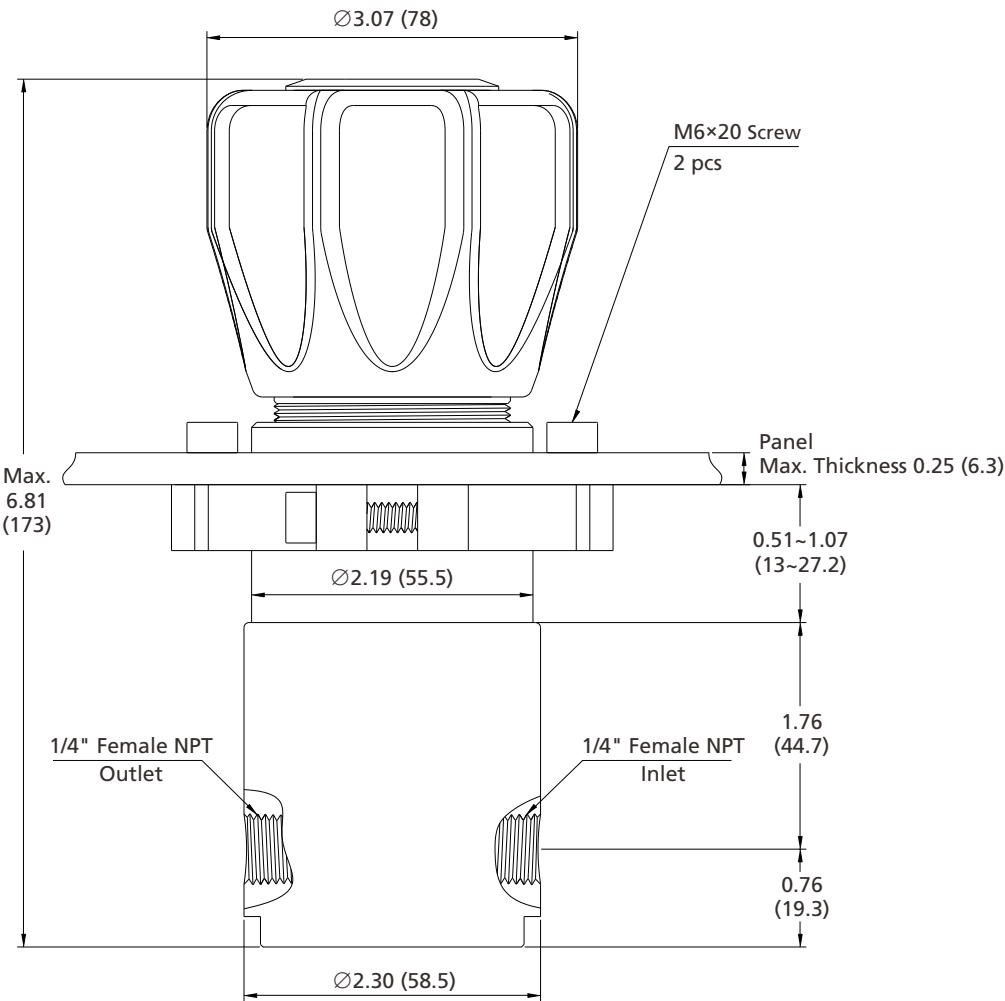

Panel Mounting Cut-Out

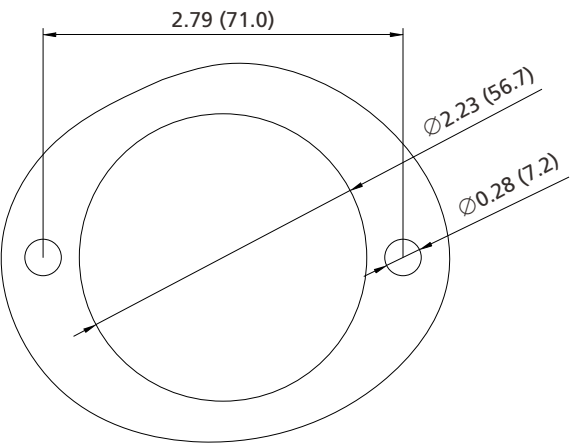

Bottom View

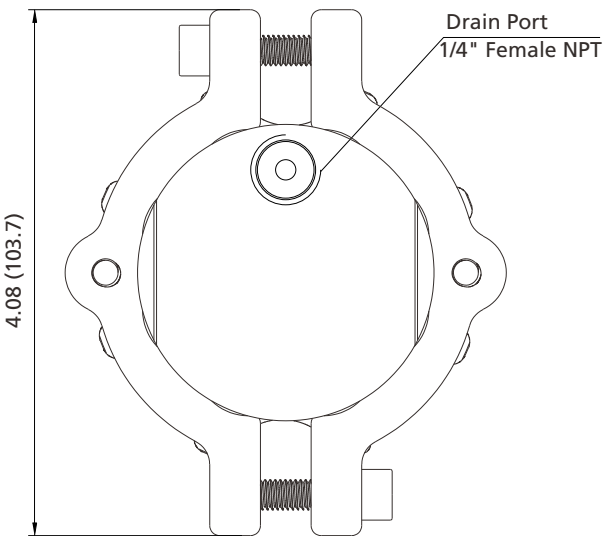

Ordering Number Description

RPGX - SS - 10K - 6K - 3R3 - FNS4 - NS4 - IBAP - OBR - N - SVATPM - F2

<table><tr><th colspan="2">Body Material</th></tr><tr><td>SS</td><td>316 SS</td></tr><tr><td>B</td><td>Brass</td></tr></table>	Body Material		SS	316 SS	B	Brass	<table><tr><th colspan="2">Porting</th></tr><tr><td>1H1</td><td>1 Inlet & 1 Outlet</td></tr><tr><td>1R2</td><td>1 Inlet & 2 Outlets</td></tr><tr><td>1L2</td><td>1 Inlet & 2 Outlets</td></tr><tr><td>2R2</td><td>2 Inlets & 2 Outlets</td></tr><tr><td>2L2</td><td>2 Inlets & 2 Outlets</td></tr><tr><td>3R3</td><td>3 Inlets & 3 Outlets</td></tr><tr><td>3L3</td><td>3 Inlets & 3 Outlets</td></tr></table>	Porting		1H1	1 Inlet & 1 Outlet	1R2	1 Inlet & 2 Outlets	1L2	1 Inlet & 2 Outlets	2R2	2 Inlets & 2 Outlets	2L2	2 Inlets & 2 Outlets	3R3	3 Inlets & 3 Outlets	3L3	3 Inlets & 3 Outlets	<table><tr><th colspan="2">Inlet Pressure Gauge Port (Gi)</th></tr><tr><td></td><td>Without pressure gauge, refer to Note 5</td></tr><tr><td>IB</td><td>Gauge (psi/bar)</td></tr><tr><td>IM</td><td>Gauge (psi/MPa)</td></tr><tr><td>IP</td><td>Plug</td></tr></table>	Inlet Pressure Gauge Port (Gi)			Without pressure gauge, refer to Note 5	IB	Gauge (psi/bar)	IM	Gauge (psi/MPa)	IP	Plug	<table><tr><th colspan="2">O-Ring Material</th></tr><tr><td></td><td>FKM</td></tr><tr><td>N</td><td>NBR</td></tr></table>	O-Ring Material			FKM	N	NBR	<table><tr><th colspan="2">Process Specification</th></tr><tr><td>F1</td><td>FC-01</td></tr><tr><td>F2</td><td>FC-02</td></tr></table>	Process Specification		F1	FC-01	F2	FC-02
Body Material																																																
SS	316 SS																																															
B	Brass																																															
Porting																																																
1H1	1 Inlet & 1 Outlet																																															
1R2	1 Inlet & 2 Outlets																																															
1L2	1 Inlet & 2 Outlets																																															
2R2	2 Inlets & 2 Outlets																																															
2L2	2 Inlets & 2 Outlets																																															
3R3	3 Inlets & 3 Outlets																																															
3L3	3 Inlets & 3 Outlets																																															
Inlet Pressure Gauge Port (Gi)																																																
	Without pressure gauge, refer to Note 5																																															
IB	Gauge (psi/bar)																																															
IM	Gauge (psi/MPa)																																															
IP	Plug																																															
O-Ring Material																																																
	FKM																																															
N	NBR																																															
Process Specification																																																
F1	FC-01																																															
F2	FC-02																																															
<table><tr><th colspan="2">Max. Inlet Pressure</th></tr><tr><td>6K</td><td>6000 psig (414 bar)</td></tr><tr><td>10K</td><td>10000 psig (690 bar)</td></tr></table>	Max. Inlet Pressure		6K	6000 psig (414 bar)	10K	10000 psig (690 bar)	<table><tr><th colspan="2">Inlet (IN)</th></tr><tr><td>FNS4</td><td>1/4" Female NPT</td></tr><tr><td>NS4</td><td>1/4" Male NPT</td></tr><tr><td>FL4</td><td>1/4" Tube Fitting</td></tr><tr><td>FL6</td><td>3/8" Tube Fitting</td></tr><tr><td>ML6</td><td>6 mm Tube Fitting</td></tr><tr><td>ML8</td><td>8 mm Tube Fitting</td></tr></table>	Inlet (IN)		FNS4	1/4" Female NPT	NS4	1/4" Male NPT	FL4	1/4" Tube Fitting	FL6	3/8" Tube Fitting	ML6	6 mm Tube Fitting	ML8	8 mm Tube Fitting	<table><tr><th colspan="2">Auxiliary Inlet (Ein)</th></tr><tr><td></td><td>Without plug, refer to Note 5</td></tr><tr><td>AP</td><td>Plug</td></tr></table>	Auxiliary Inlet (Ein)			Without plug, refer to Note 5	AP	Plug	<table><tr><th colspan="2">Vent Option</th></tr><tr><td></td><td>None</td></tr><tr><td>SV</td><td>Self-Venting</td></tr></table>	Vent Option			None	SV	Self-Venting	<table><tr><th colspan="2">Panel Mounting</th></tr><tr><td></td><td>Fixedly Mounted at Pipe Inlet or Outlet</td></tr><tr><td>PM</td><td>Panel Mounting Clamp</td></tr></table>	Panel Mounting			Fixedly Mounted at Pipe Inlet or Outlet	PM	Panel Mounting Clamp						
Max. Inlet Pressure																																																
6K	6000 psig (414 bar)																																															
10K	10000 psig (690 bar)																																															
Inlet (IN)																																																
FNS4	1/4" Female NPT																																															
NS4	1/4" Male NPT																																															
FL4	1/4" Tube Fitting																																															
FL6	3/8" Tube Fitting																																															
ML6	6 mm Tube Fitting																																															
ML8	8 mm Tube Fitting																																															
Auxiliary Inlet (Ein)																																																
	Without plug, refer to Note 5																																															
AP	Plug																																															
Vent Option																																																
	None																																															
SV	Self-Venting																																															
Panel Mounting																																																
	Fixedly Mounted at Pipe Inlet or Outlet																																															
PM	Panel Mounting Clamp																																															
<table><tr><th colspan="2">Outlet Pressure Range</th></tr><tr><td>5H</td><td>10~500 psig (0.69~34.4 bar)</td></tr><tr><td>8H</td><td>15~800 psig (1.03~55.2 bar)</td></tr><tr><td>15H</td><td>15~1500 psig (1.03~103 bar)</td></tr><tr><td>25H</td><td>30~2500 psig (2.1~172 bar)</td></tr><tr><td>4K</td><td>50~4000 psig (3.4~276 bar)</td></tr><tr><td>6K</td><td>60~6000 psig (4.1~414 bar)</td></tr><tr><td>10K</td><td>200~10000 psig (13.8~690 bar)</td></tr></table>	Outlet Pressure Range		5H	10~500 psig (0.69~34.4 bar)	8H	15~800 psig (1.03~55.2 bar)	15H	15~1500 psig (1.03~103 bar)	25H	30~2500 psig (2.1~172 bar)	4K	50~4000 psig (3.4~276 bar)	6K	60~6000 psig (4.1~414 bar)	10K	200~10000 psig (13.8~690 bar)	<table><tr><th colspan="2">Outlet (OUT)</th></tr><tr><td></td><td>Same as Inlet</td></tr><tr><td colspan="2">Specified in the same way as Inlet</td></tr></table>	Outlet (OUT)			Same as Inlet	Specified in the same way as Inlet		<table><tr><th colspan="2">Outlet Pressure Gauge Port (Go)</th></tr><tr><td></td><td>Without pressure gauge, refer to Note 5</td></tr><tr><td>OB</td><td>Gauge (psi/bar)</td></tr><tr><td>OM</td><td>Gauge (psi/MPa)</td></tr><tr><td>OP</td><td>Plug</td></tr></table>	Outlet Pressure Gauge Port (Go)			Without pressure gauge, refer to Note 5	OB	Gauge (psi/bar)	OM	Gauge (psi/MPa)	OP	Plug	<table><tr><th colspan="2">Handle</th></tr><tr><td></td><td>Round Handle</td></tr><tr><td>AT</td><td>For lock nut, see Note 7</td></tr></table>	Handle			Round Handle	AT	For lock nut, see Note 7							
Outlet Pressure Range																																																
5H	10~500 psig (0.69~34.4 bar)																																															
8H	15~800 psig (1.03~55.2 bar)																																															
15H	15~1500 psig (1.03~103 bar)																																															
25H	30~2500 psig (2.1~172 bar)																																															
4K	50~4000 psig (3.4~276 bar)																																															
6K	60~6000 psig (4.1~414 bar)																																															
10K	200~10000 psig (13.8~690 bar)																																															
Outlet (OUT)																																																
	Same as Inlet																																															
Specified in the same way as Inlet																																																
Outlet Pressure Gauge Port (Go)																																																
	Without pressure gauge, refer to Note 5																																															
OB	Gauge (psi/bar)																																															
OM	Gauge (psi/MPa)																																															
OP	Plug																																															
Handle																																																
	Round Handle																																															
AT	For lock nut, see Note 7																																															
		<table><tr><th colspan="2">Auxiliary Outlet (Eout)</th></tr><tr><td></td><td>Without plug, refer to Note 5</td></tr><tr><td>RP</td><td>Plug</td></tr><tr><td>R</td><td>With relief valve, refer to Note 6</td></tr></table>	Auxiliary Outlet (Eout)			Without plug, refer to Note 5	RP	Plug	R	With relief valve, refer to Note 6																																						
Auxiliary Outlet (Eout)																																																
	Without plug, refer to Note 5																																															
RP	Plug																																															
R	With relief valve, refer to Note 6																																															

Notes:

1. "Ordering Number Description" is a reference to understand the combination rules of FITOK product part number.
Not all combinations are available.
2. Drain port at the bottom of the regulator can not be blocked.
3. Differentiating media status when selecting the vent option:
 - (1) Liquid Services: For downstream pipelines with minimal residual media, install the regulator with the drain port facing vertically downward. This configuration allows liquid to drain effectively from the bottom port when the self-venting feature is selected.
 - (2) Gas Services: With the self-venting feature, gas can be vented directly to the atmosphere from below the handle.
 - (3) Fully captured-vent option is available upon request. Contact FITOK Group or our authorized distributors for more information.
4. When choosing NPT or Metric/Fractional Tube Fitting ports, the regulator body comes with 1/4" Female NPT inlet and outlet by default. Other options are adapted from 1/4" Male NPT.
5. When choosing NPT or Metric/Fractional Tube Fitting for inlet and outlet, gauge ports (Gi, Go) and auxiliary ports (Ein, Eout) are 1/4" Female NPT.
6. For the outlet relief valve, the set pressure is factory-set to 1.05-1.1 times the maximum outlet pressure by default, FITOK can preset the specified set pressure according to customer requirements. Please specify the desired set pressure when placing your order.
7. Lock nut (AT): The metal lock nut construction is designed to prevent accidental pressure adjustments. FITOK can set the specified outlet pressure based on customer requirements; simply include this information in the remarks when placing an order.
If the outlet pressure is not specified, customers will need to adjust and fix it themselves.

High Flow Piston Regulators

RPGN Series

Introduction

RPGN Series High Flow Piston Regulators feature a single-stage pressure reduction design with a piston sensing mechanism that is more resistant to damage caused by pressure spikes and offers a broad outlet pressure range, making them ideal for high flow applications.

Features


- ⦿ Large diameter piston improves pressure sensitivity.
- ⦿ Optional self-venting feature.

Technical Data

Port Size			1/2", 3/4", 16 mm or 18 mm
Max. Working Pressure	F316 SS, F316L SS		4500 psig (310 bar)
	Brass		3800 psig (262 bar)
Outlet Pressure Range			0 ~ 300 psig (0 ~ 20.7 bar)
			0 ~ 600 psig (0 ~ 41.4 bar)
			0 ~ 1000 psig (0 ~ 69.0 bar)
			0 ~ 1500 psig (0 ~ 103 bar)
Flow Coefficient (Cv)			2.0
Working Temperature	FKM		-4 ~ 220 °F (-20 ~ 104 °C)
	FFKM		1.4 ~ 220 °F (-17 ~ 104 °C)
SPE (Supply Pressure Effect)	Max. Outlet Pressure: 300, 600 psig		1.5 psig per 100 psig source pressure change
	Max. Outlet Pressure: 1000, 1500 psig		4 psig per 100 psig source pressure change
Leak Rate		External	Bubble tight
		Internal	Bubble tight



Flow Data

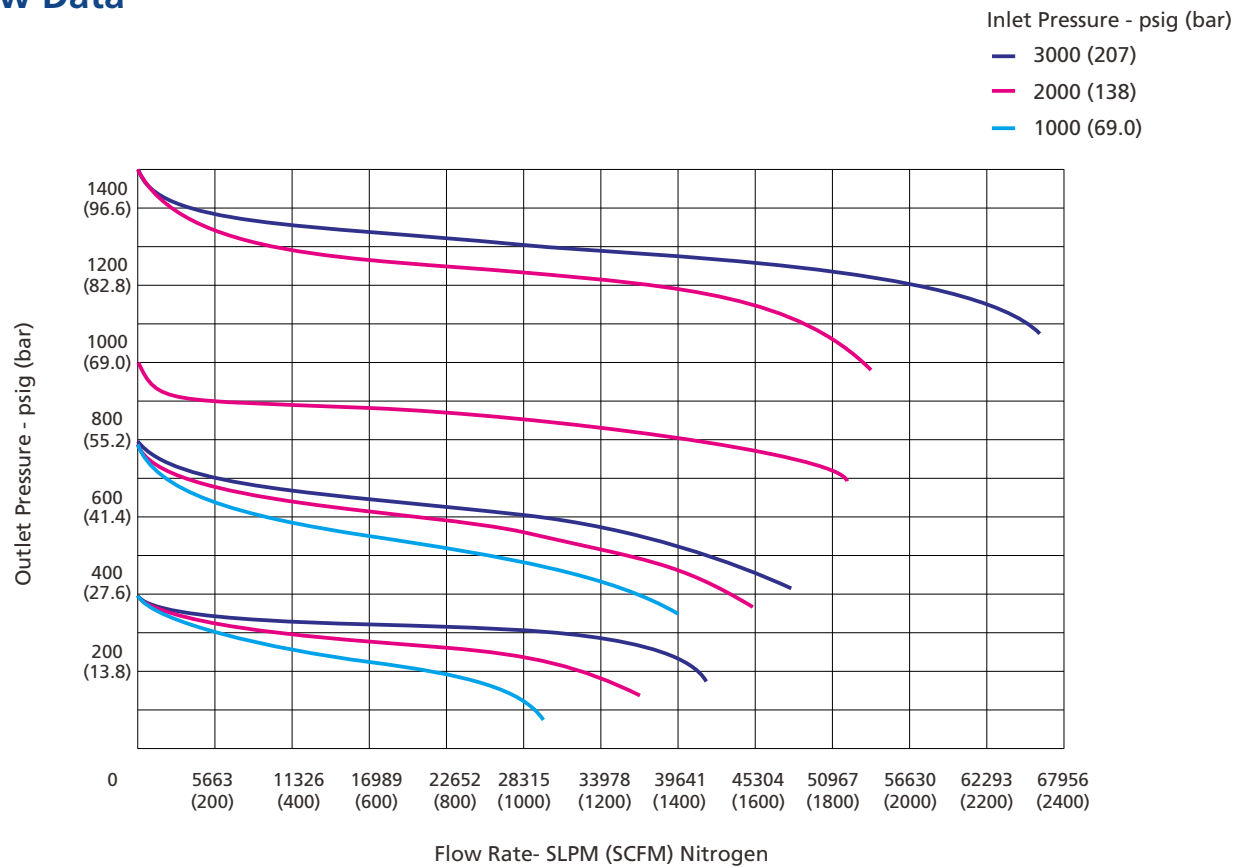

Process Specification


Process Specification	
Item	Special Cleaning and Packaging Process (FC-02)
Material	F316 SS, F316L SS, Brass
Wetted Surface Roughness	Ra 32 μin. (0.8 μm)
Polishing Process	Machine Finished
Assembly Environment	In specially cleaned areas
Packaging	Double bagged

Major Materials of Construction

Gas Control Equipment


Related Products

Technical References

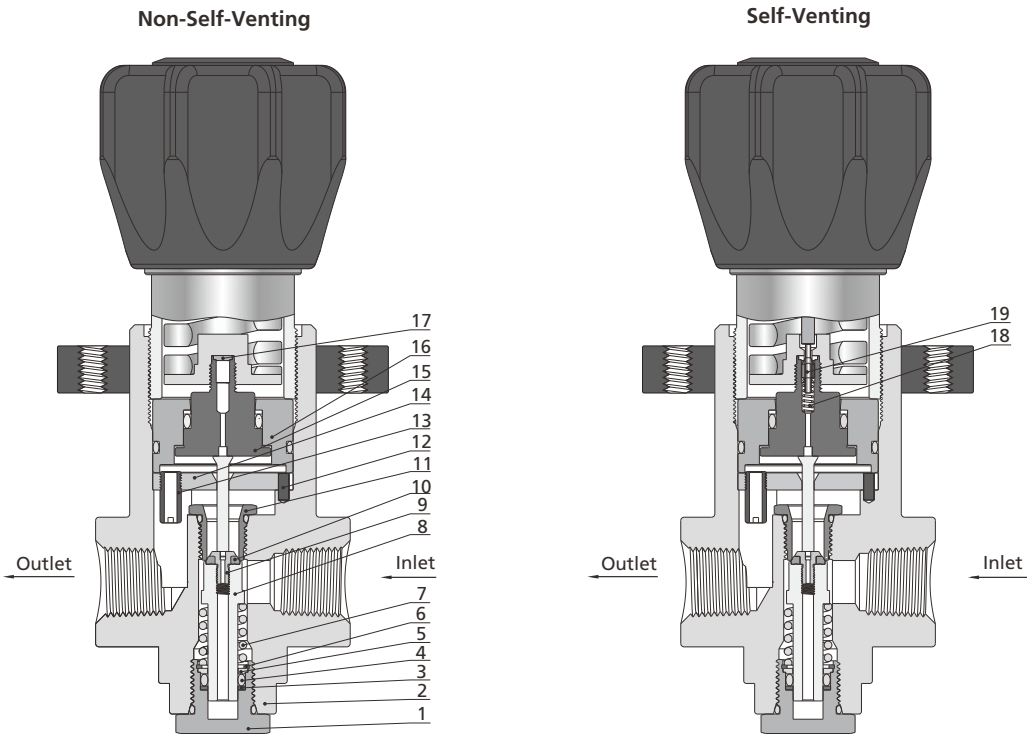

Item	Component	Material/Specification
1	Plug	316 SS/ASTM A479 or Brass
2	Body	F316 SS/ASTM A182 or F316L SS/ASTM A182 or Brass
3	Circlip	PEEK
4	O-Ring	FKM or FFKM
5	Gland	316 SS/ASTM A479
6	Circlip for Bores	304 SS
7	Poppet Spring	316 SS/ASTM A313
8	Lift Poppet	316 SS/ASTM A479
9	Screw	S17400/ASTM A564
10	Seat	PCTFE/ASTM D1430
11	Seat Retainer	316 SS/ASTM A479
12	Pin	316 SS/ASTM A479
13	Cylinder	316 SS/ASTM A479
14	Guide Block	316 SS/ASTM A479
15	Piston	316 SS/ASTM A479
16	Piston Ring	316 SS/ASTM A479
17	Auxiliary Seat	PCTFE/ASTM D1430
18	Poppet Spring	316L SS/ASTM A313
19	Auxiliary Poppet	S17400/ASTM A564

Porting Configurations

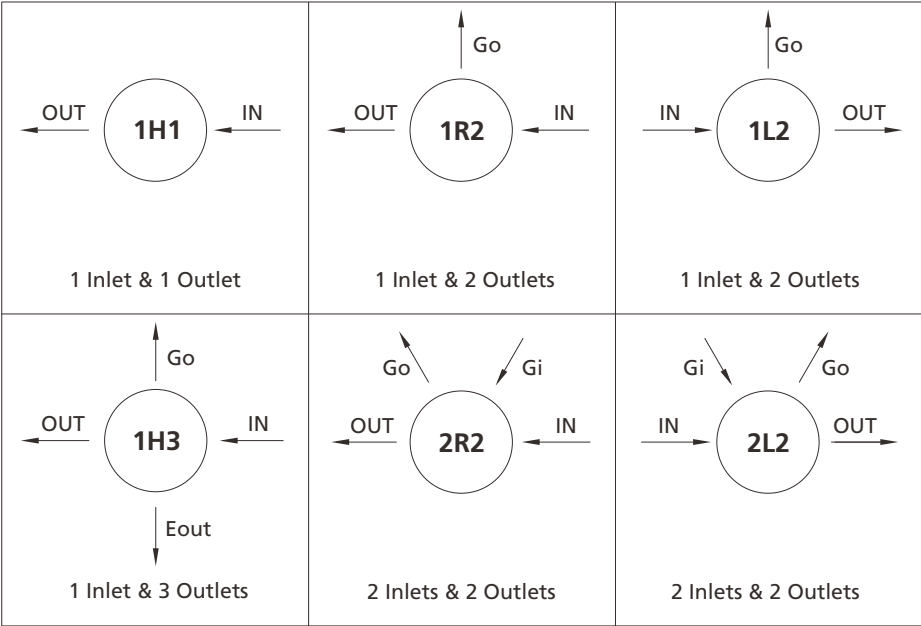




Porting Configuration Symbol

IN	OUT	Gi	Go	Eout
Inlet	Outlet	Inlet Pressure Gauge Port	Outlet Pressure Gauge Port	Auxiliary Outlet


- Notes:
- 1. IN and OUT are the inlet and outlet ports for connecting the valve to the system. Ports other than IN and OUT should not be used for system connections.
 - 2. Porting configuration is viewed from the top.

Dimensions

Dimensions, in inches (millimeters), are for reference only.

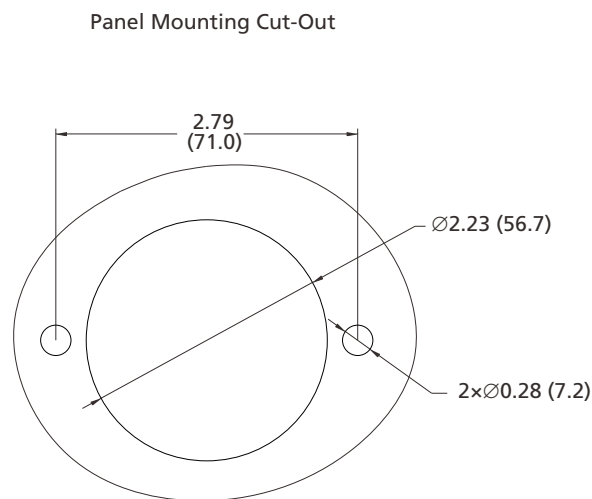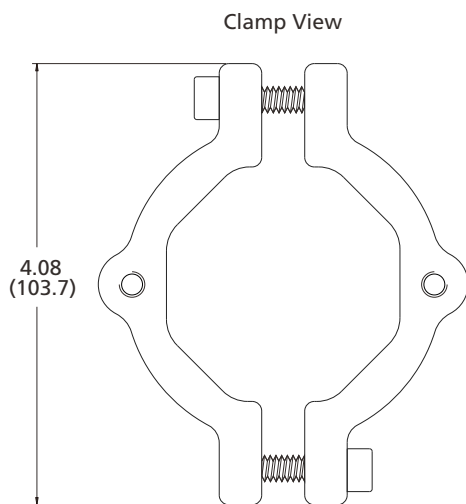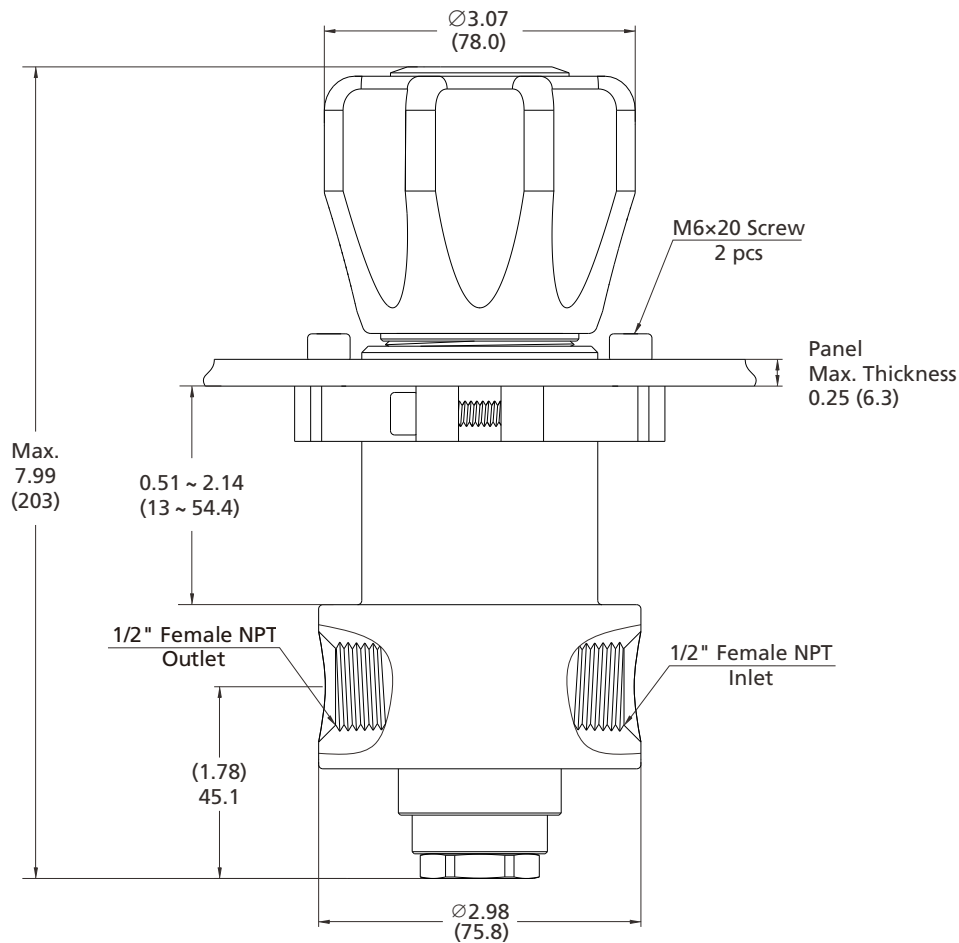

Ordering Number Description

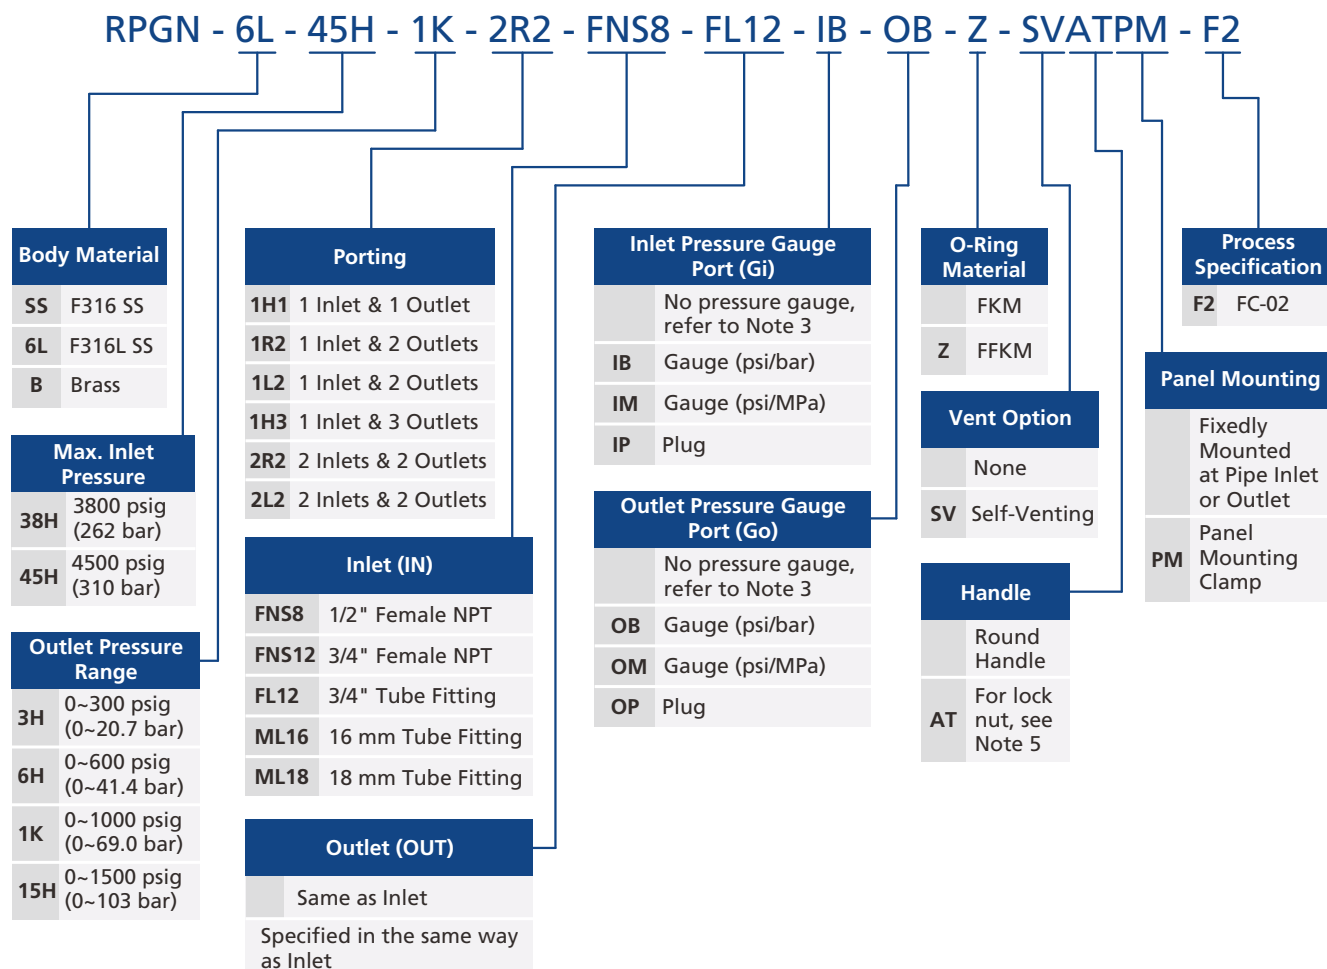

Notes:

- "Ordering Number Description" is a reference to understanding the combination rules of FITOK product part numbers. Not all combinations are available. Should you have any questions, please contact FITOK Group or our authorized distributors.
- When choosing NPT or Metric/Fractional Tube Fitting ports, the regulator body comes with 1/2" Female NPT inlet and outlet by default. Other options are adapted from 1/2" Male NPT.
- When choosing NPT or Metric/Fractional Tube Fitting for inlet and outlet, gauge ports (Gi, Go) and auxiliary outlet (Eout) are 1/4" Female NPT.
- When using the vent function, media will be discharged into the atmosphere from beneath the handle.
- Lock nut (AT): The metal lock nut construction is designed to prevent accidental pressure adjustments. FITOK can set the specified outlet pressure based on customer requirements; simply include this information in the remarks when placing an order. If the outlet pressure is not specified, customers will need to adjust and fix it themselves.

Back Pressure Regulators



Contents

General Diaphragm Back Pressure Regulators	
BDGC Series	A-75
General Piston Back Pressure Regulators	
BPGC Series	A-80
High Pressure Piston Back Pressure Regulators	
BPGX Series	A-85

Gas Control Equipment
Related Products
Technical References

General Diaphragm Back Pressure Regulators

BDGC Series

Introduction

BDGC Series General Diaphragm Back Pressure Regulators feature a metal diaphragm design, ensuring excellent sensitivity and set point pressure stability. These regulators are ideal for handling various gas and low viscosity liquid media with small to medium flow.

Features


- ⦿ Lightweight, compact design.
- ⦿ Metal-to-metal seal between valve body and diaphragm provides ensured sealing performance.

Technical Data

Port Size	1/4", 3/8", 6 mm or 8 mm	
Max. Control Pressure	250 psig (17.2 bar)	
Pressure Control Range	0 ~ 25 psig (0 ~ 1.7 bar)	
	0 ~ 50 psig (0 ~ 3.4 bar)	
	0 ~ 100 psig (0 ~ 6.9 bar)	
	0 ~ 250 psig (0 ~ 17.2 bar)	
Flow Coefficient (Cv)	0.3	
Working Temperature	-40 ~ 165 °F (-40 ~ 74 °C)	
Leak Rate	External	≤1×10 ⁻⁹ std cm ³ /s (helium)
	Internal	Bubble tight



Flow Data

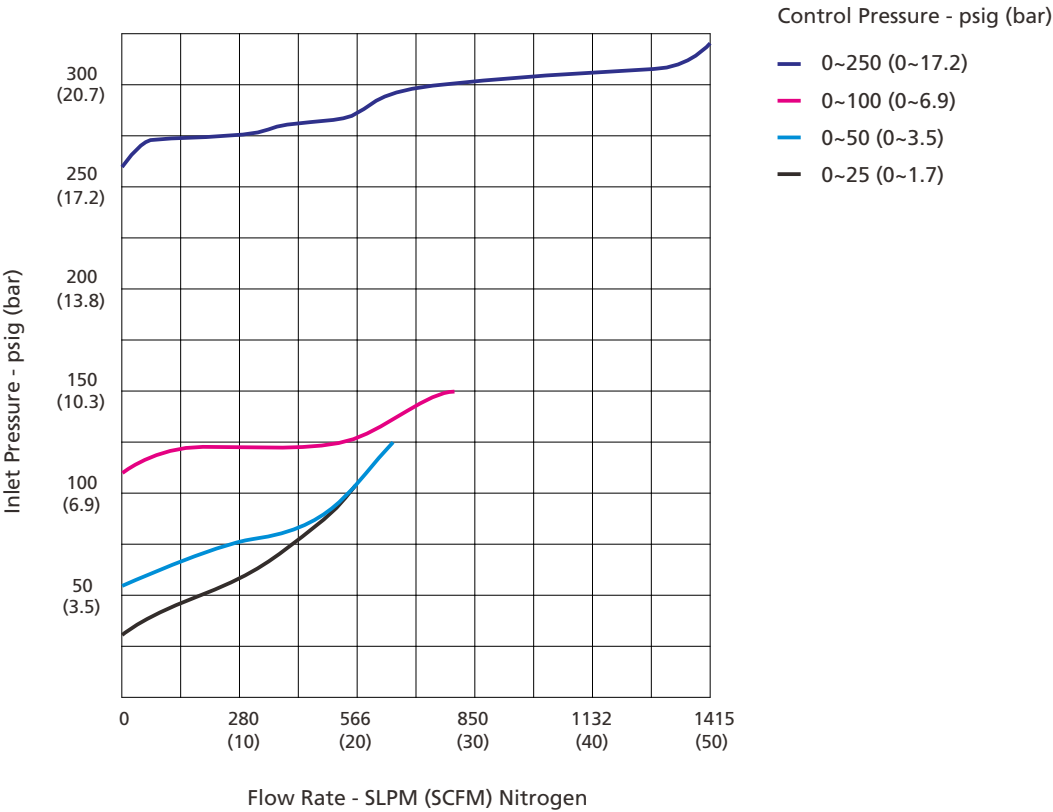


Process Specification

Process Specification	
Item	Special Cleaning and Packaging Process (FC-02)
Material	316L SS, Brass (Nickle-Plated)
Wetted Surface Roughness	Face Seal Connection or Butt Weld Connection: Ra 20 μin. (0.5 μm) Threaded Connection or Tube Fitting Connection: Ra 32 μin. (0.8 μm)
Polishing Process	Machine Finished
Assembly Environment	In specially cleaned areas
Packaging	Double bagged


Note: For products with higher surface finish, please contact FITOK.

Major Materials of Construction

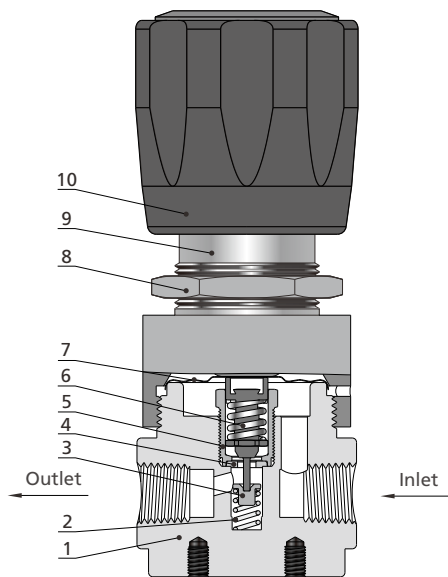

Item	Component	Material/Specification
1	Body	316L SS or Brass (Nickle-Plated)
2	Poppet Spring	316 SS/ASTM A313
3	Friction Sleeve	316L SS/ASTM A479
4	Seat	PCTFE/ASTM D1430 or PTFE/ASTM D1710
5	Seat Retainer	316L SS/ASTM A479
6	Lift Poppet Assembly	316L SS and 316 SS
7	Diaphragm	316L SS/ASTM A240
8	Panel Nut	304 SS/ASTM A479
9	Bonnet	304 SS/ASTM A479 or Brass (Nickle-Plated)
10	Handle	ABS

Porting Configurations

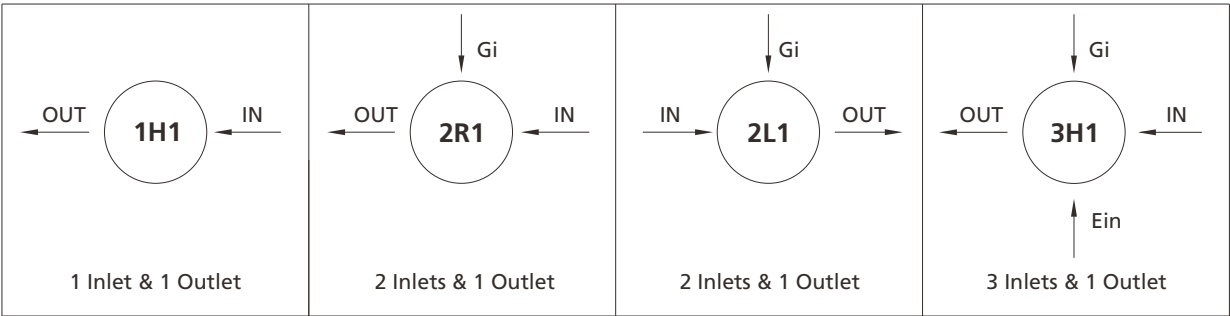


Porting Configuration Symbol

IN	OUT	Gi	Ein
Inlet	Outlet	Inlet Pressure Gauge Port	Auxiliary Inlet


- Notes:
- 1. IN and OUT are the inlet and outlet ports for connecting the valve to the system. Ports other than IN and OUT should not be used for system connections.
 - 2. Porting configuration is viewed from the top.

Dimensions


Dimensions, in inches (millimeters), are for reference only.

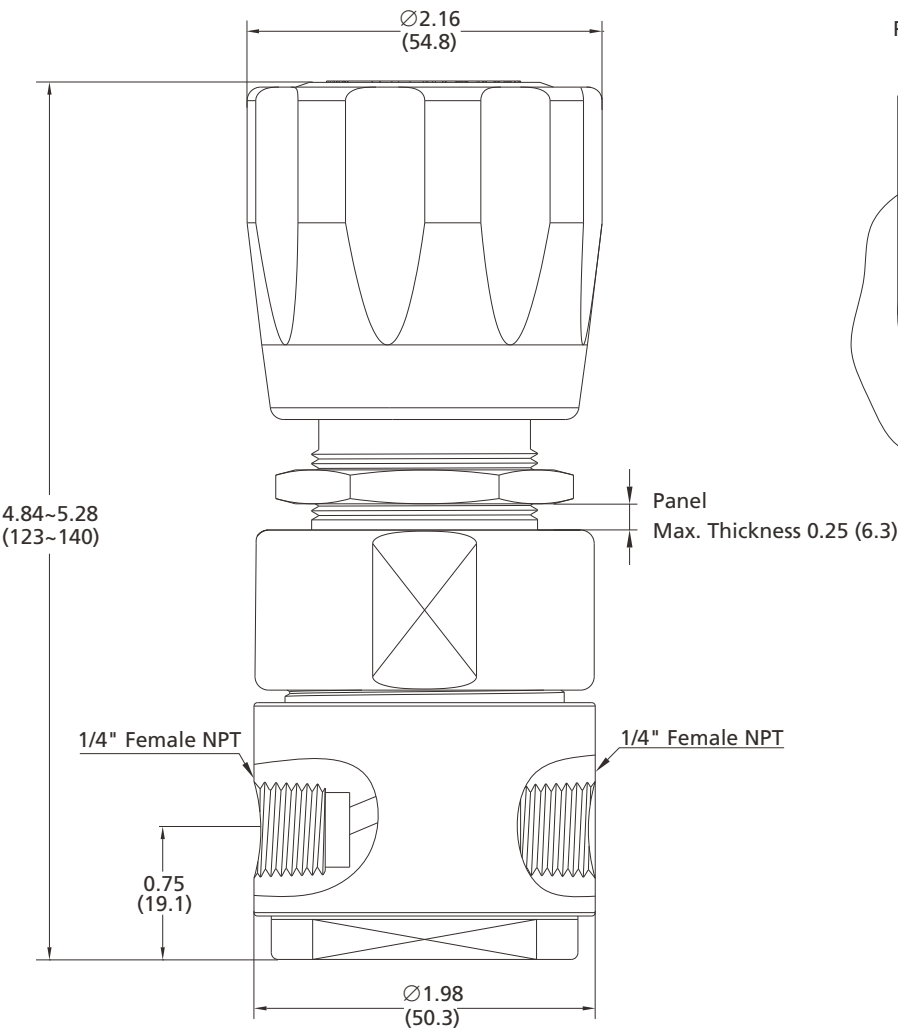


Panel Mounting Cut-Out

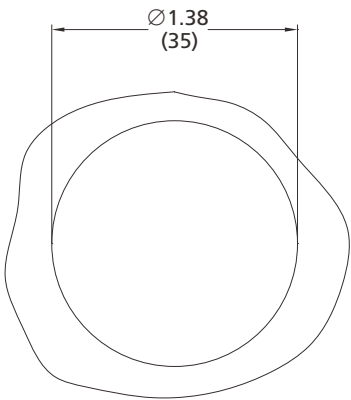


Bottom View

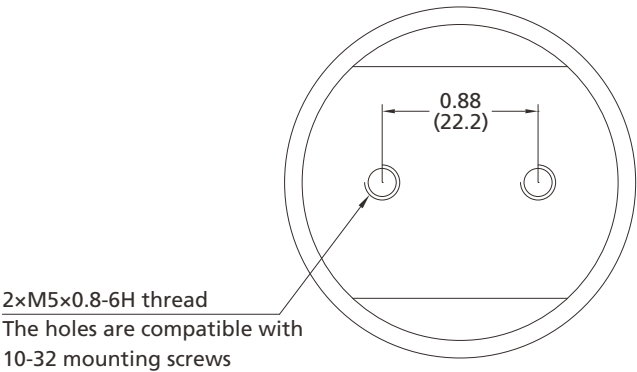

Bottom Mounting Cut-Outs

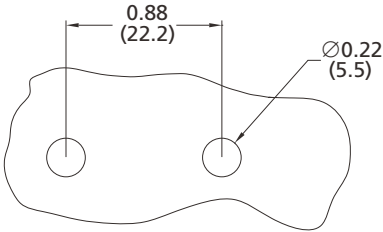

Ordering Number Description

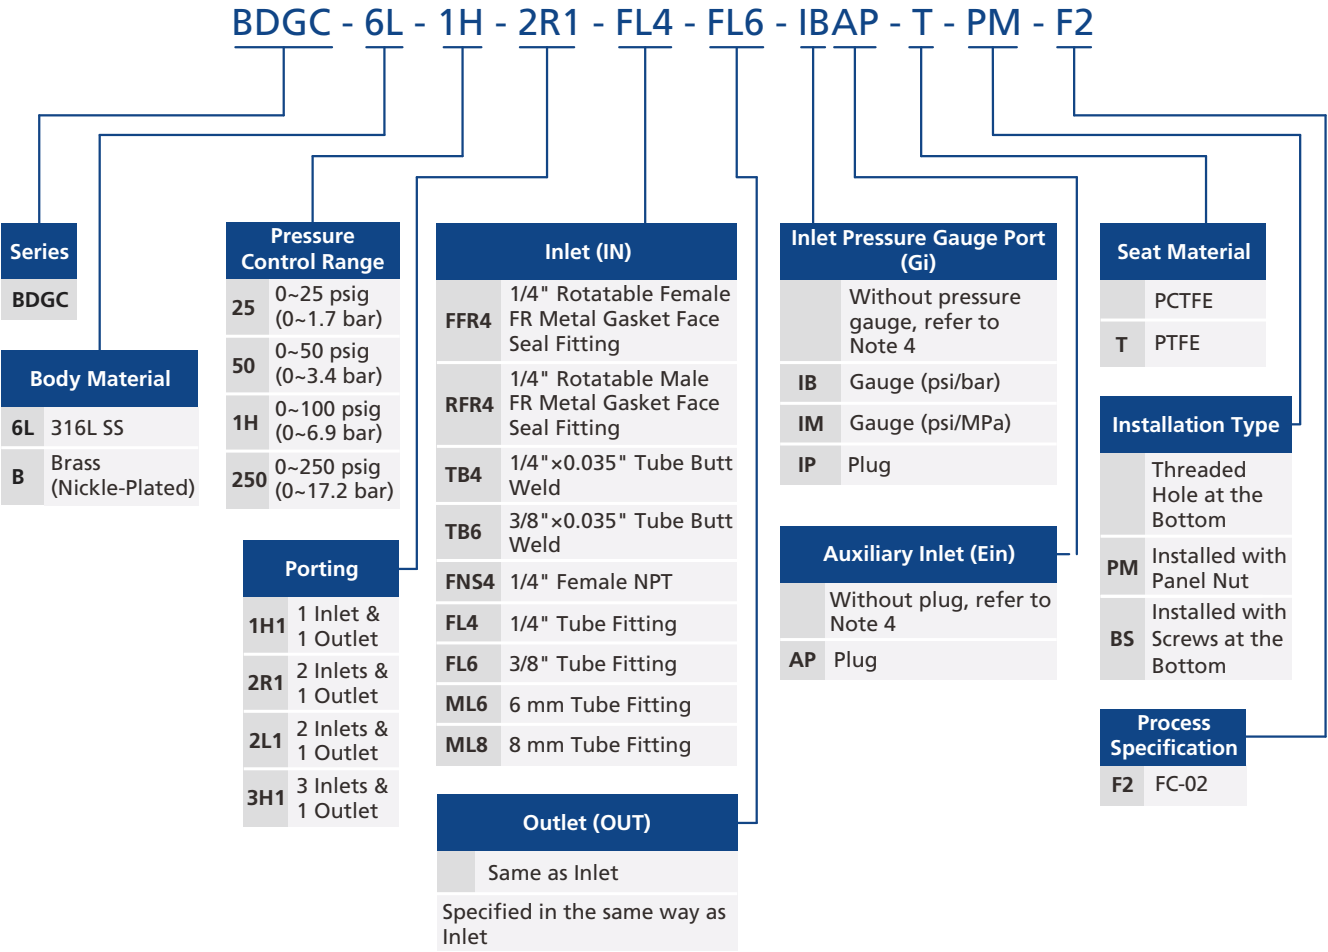

- Notes:
- 1. "Ordering Number Description" is a reference to understand the combination rules of FITOK product part number. Not all combinations are available.
 - 2. For metal gasket face seal fitting connection or tube butt weld connection, the connection and body are orbital-welded integral structure by default.
 - 3. For NPT connection and Metric/Fractional Tube Fitting connection, the body connection is 1/4" Female NPT by default. Other options are adapted from Male NPT.
 - 4. When choosing NPT or Metric/Fractional Tube Fitting for inlet and outlet, gauge connection (Gi) and auxiliary inlet (Ein) are 1/4" Female NPT. When choosing Metal Gasket Face Seal Fitting or Tube Butt Weld for inlet and outlet, gauge connection (Gi) and auxiliary inlet (Ein) are 1/4" Rotatable Male FR Metal Gasket Face Seal Fitting.

General Piston Back Pressure Regulators

BPGC Series

Introduction

BPGC Series General Piston Back Pressure Regulators feature a piston sensing mechanism, offering robust resistance to damage caused by pressure spikes. These regulators are ideal for regulating medium to high pressure settings.

Features


- ⦿ Piston sensing mechanism offers a wider pressure control range.
- ⦿ The bonnet includes a captured vent port, allowing media to be vented to a designated location in the event of accidental O-ring failure.

Technical Data

Port Size		1/4", 3/8", 6 mm or 8 mm
Max. Control Pressure		1000 psig (68.9 bar)
Pressure Control Range		10 ~ 300 psig (0.69 ~ 20.7 bar)
		10 ~ 500 psig (0.69 ~ 34.5 bar)
		10 ~ 1000 psig (0.69 ~ 68.9 bar)
Flow Coefficient (Cv)		0.3
Working Temperature	FKM	-4 ~ 165 °F (-20 ~ 74 °C)
	FFKM	1.4 ~ 165 °F (-17 ~ 74 °C)
	NBR	-20 ~ 165 °F (-29 ~ 74 °C)
Leak Rate	External	Bubble tight
	Internal	Bubble tight




Flow Data

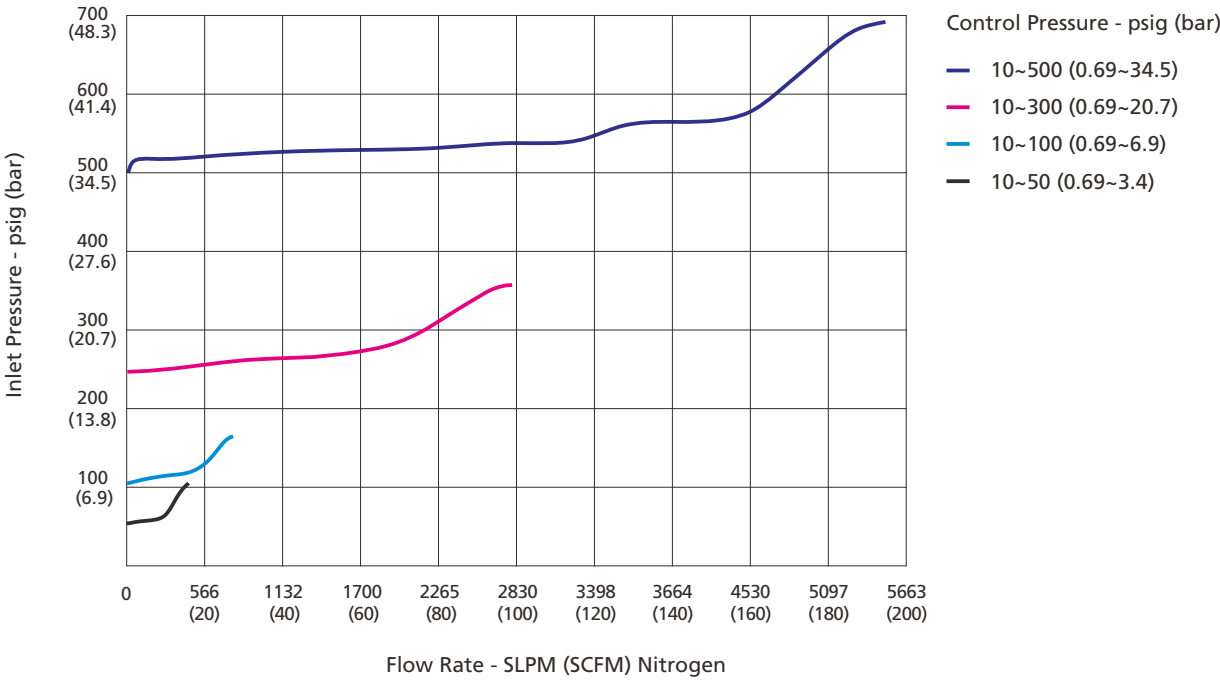

Process Specification


Process Specification	
Item	Special Cleaning and Packaging Process (FC-02)
Material	316L SS, Brass (Nickle-Plated)
Wetted Surface Roughness	Ra 32 μin. (0.8 μm)
Polishing Process	Machine Finished
Assembly Environment	In specially cleaned areas
Packaging	Double bagged

Major Materials of Construction

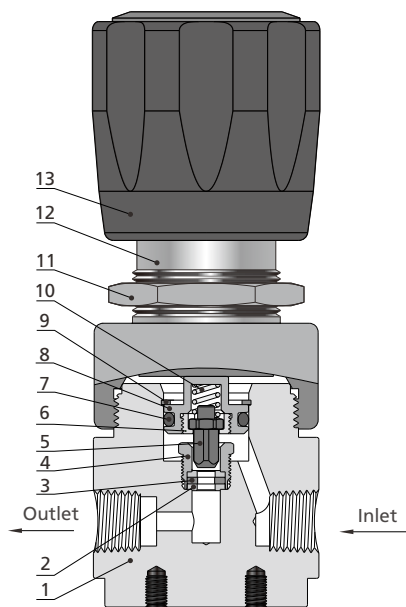

Item	Component	Material/Specification
1	Body	316L SS or Brass (Nickle-Plated)
2	Seat	PCTFE/ASTM D1430
3	Seat Gasket	316L SS/ASTM A479
4	Seat Retainer	316L SS/ASTM A479
5	Lift Poppet	316L SS/ASTM A479
6	Piston Nut	316L SS/ASTM A479
7	O-Ring	FKM or FFKM or NBR
8	Piston	316L SS/ASTM A479
9	Circlip	304 SS
10	Poppet Spring	316 SS/ASTM A313
11	Panel Nut	304 SS/ASTM A479
12	Bonnet	304 SS/ASTM A479 or Brass (Nickle-Plated)
13	Handle	ABS

Porting Configurations

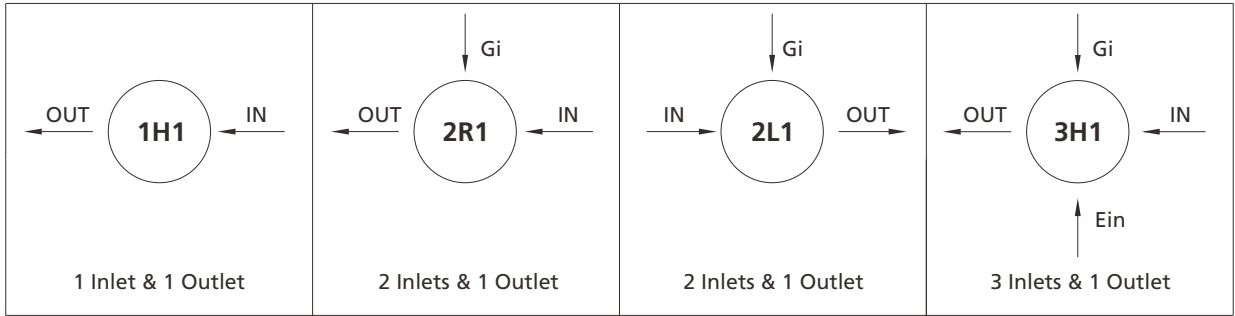


Porting Configuration Symbol

IN	OUT	Gi	Ein
Inlet	Outlet	Inlet Pressure Gauge Port	Auxiliary Inlet


- Notes:
1. IN and OUT are the inlet and outlet ports for connecting the valve to the system. Ports other than IN and OUT should not be used for system connections.
 2. Porting configuration is viewed from the top.

Dimensions

Dimensions, in inches (millimeters), are for reference only.

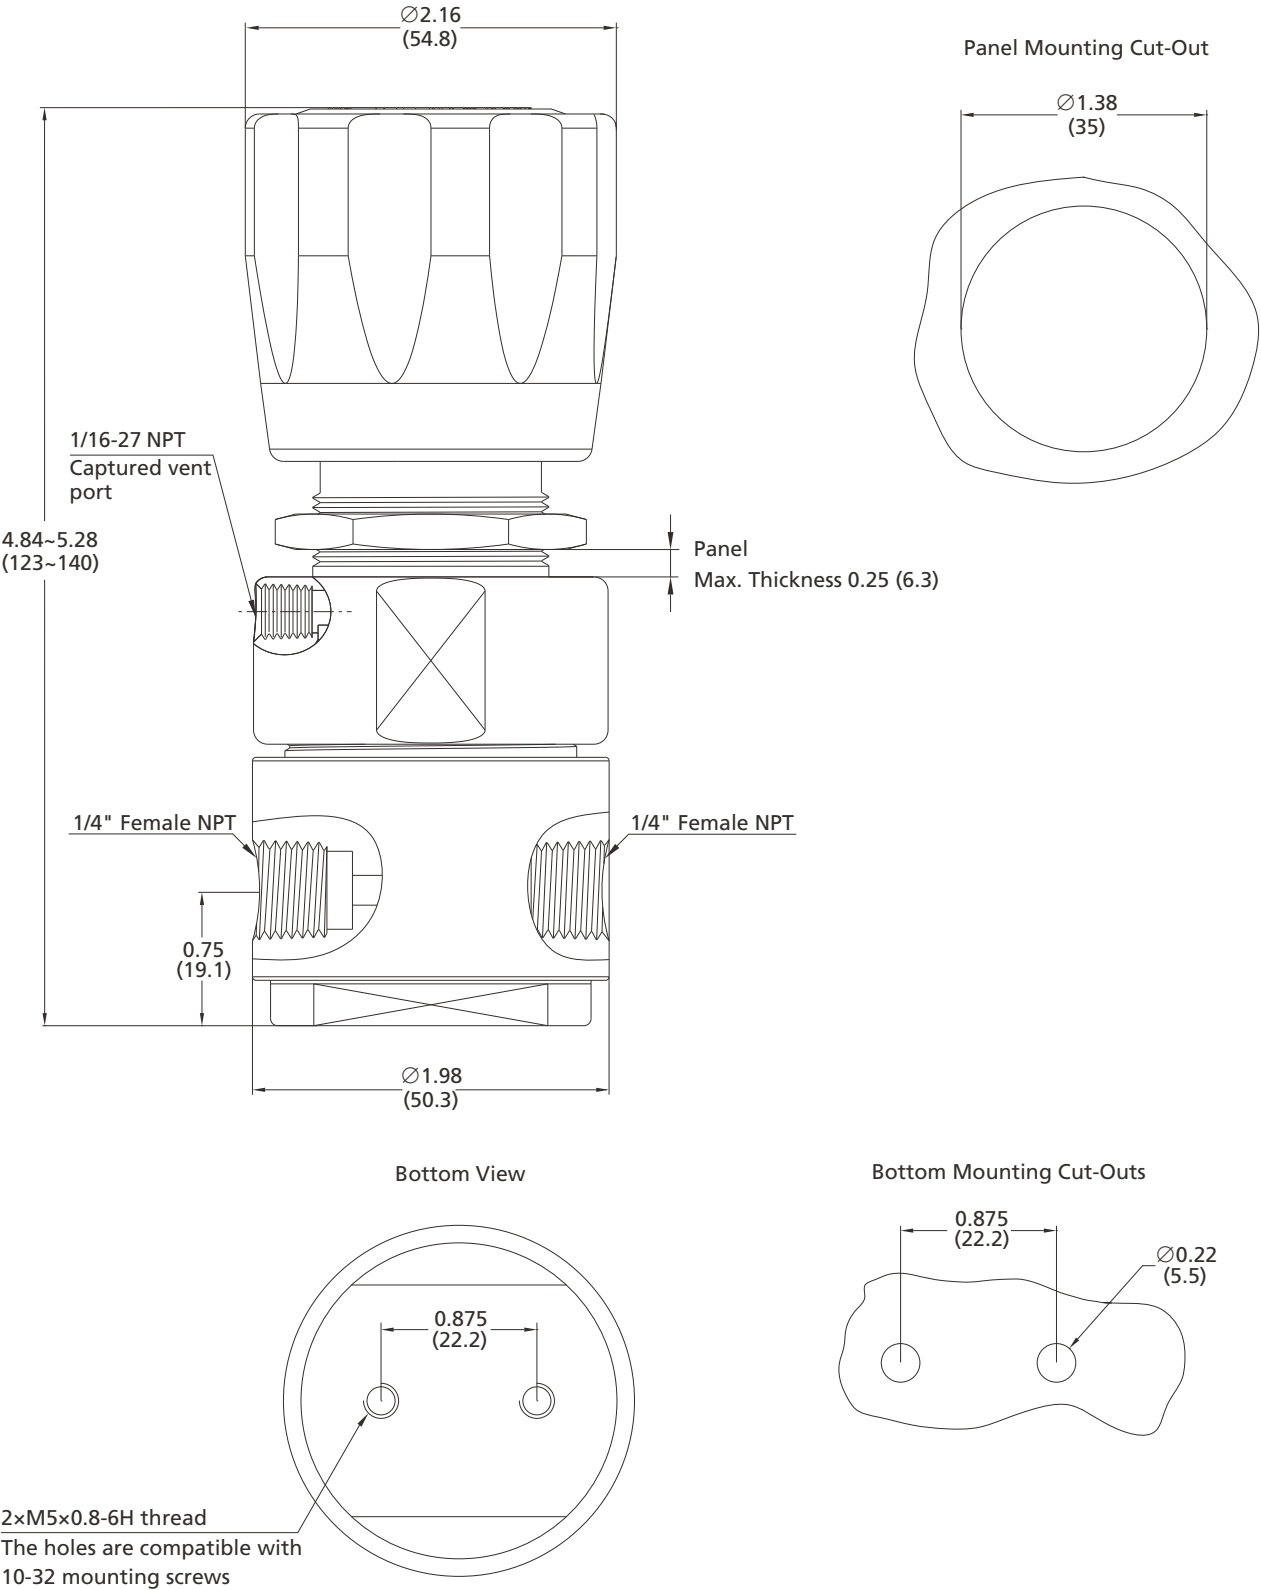

Ordering Number Description

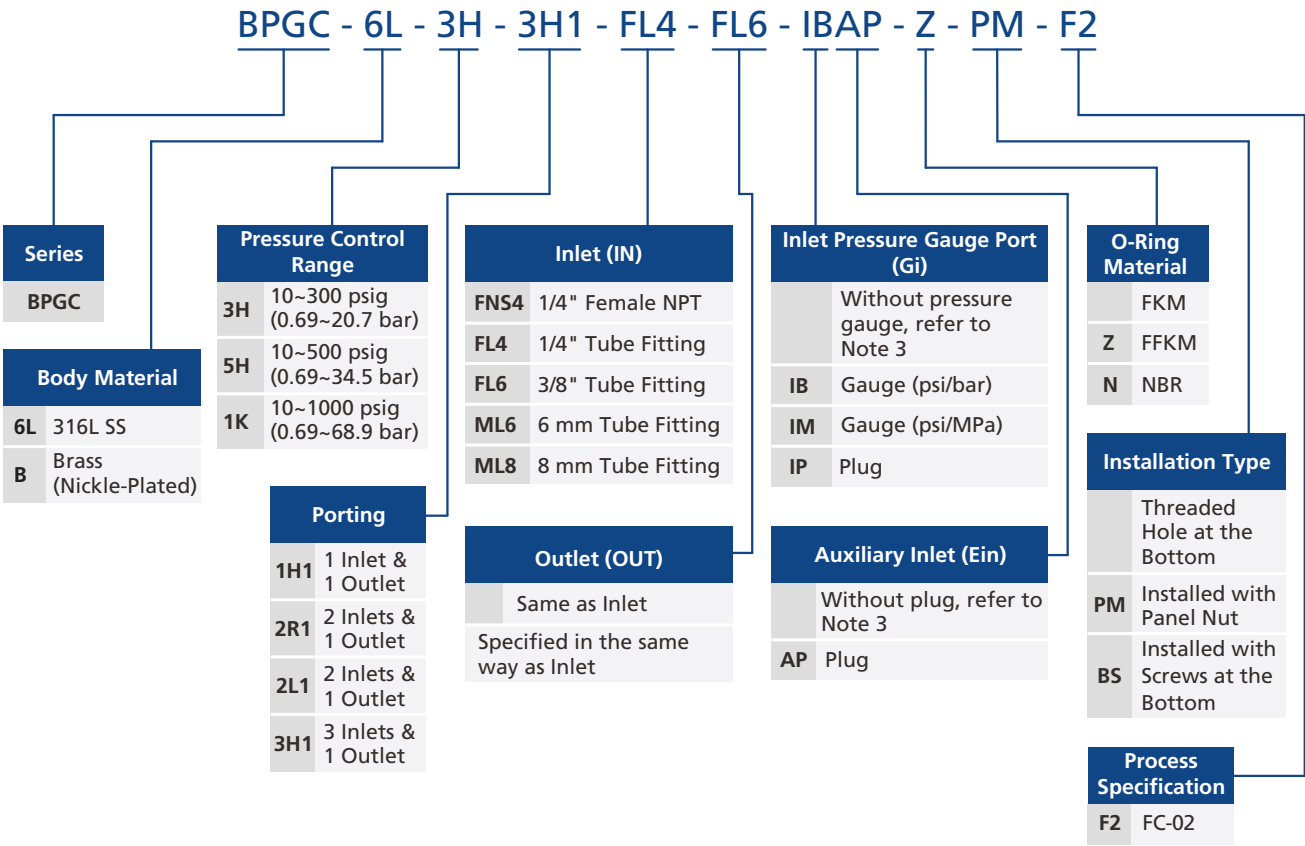

- Notes:
- "Ordering Number Description" is a reference to understand the combination rules of FITOK product part number. Not all combinations are available.
 - For NPT connection and Metric/Fractional Tube Fitting connection, the body connection is 1/4" Female NPT by default. Other options are adapted from Male NPT.
 - Gauge connection (Gi) and auxiliary inlet (Ein) are 1/4" Female NPT.

High Pressure Piston Back Pressure Regulators

BPGX Series

Introduction

BPGX Series High Pressure Piston Back Pressure Regulators feature a piston sensing mechanism and a handle using thrust roller bearing. These regulators are ideal for regulating medium to ultra high pressure settings.

Features

- Piston sensing mechanism offers a wider pressure control range.
- Thrust roller bearing eases operation.
- Panel mounting clamp available.


Technical Data

Port Size			1/4", 3/8", 6 mm or 8 mm
Max. Control Pressure	316 SS, 316L SS	10000 psig (689 bar)	
	Brass	6000 psig (414 bar)	
Pressure Control Range			5 ~ 500 psig (0.35 ~ 34.5 bar)
			5 ~ 800 psig (0.35 ~ 55.2 bar)
			10 ~ 1500 psig (0.69 ~ 103 bar)
			15 ~ 2500 psig (1.0 ~ 172 bar)
			25 ~ 4000 psig (1.7 ~ 276 bar)
			50 ~ 6000 psig (3.5 ~ 414 bar)
			200 ~ 10000 psig (13.8 ~ 689 bar) ^①
Flow Coefficient (Cv)			0.25
Working Temperature	FKM	-4 ~ 165 °F (-20 ~ 74 °C)	
	FFKM	1.4 ~ 165 °F (-17 ~ 74 °C)	
	NBR	-20 ~ 165 °F (-29 ~ 74 °C)	
Leak Rate	External	Bubble tight	
	Internal	Bubble tight	

① Applies to valves made of 316 SS and 316L SS only.




Flow Data

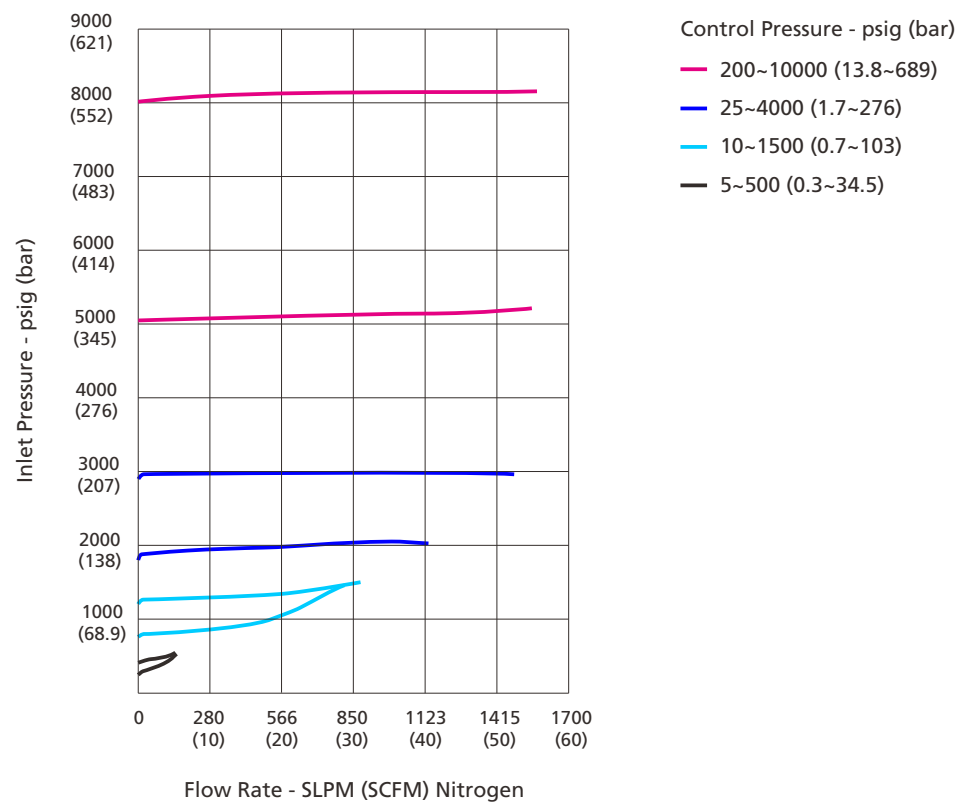

Process Specification


Item	Process Specification	
	Standard cleaning and Packaging Process (FC-01)	Special Cleaning and Packaging Process (FC-02)
Material	316 SS, 316L SS, Brass	
Wetted Surface Roughness	Ra 32 μin. (0.8 μm)	
Polishing Process	Machine Finished	
Assembly Environment	At atmosphere	In specially cleaned areas
Packaging	Individually bagged	Double bagged

Major Materials of Construction

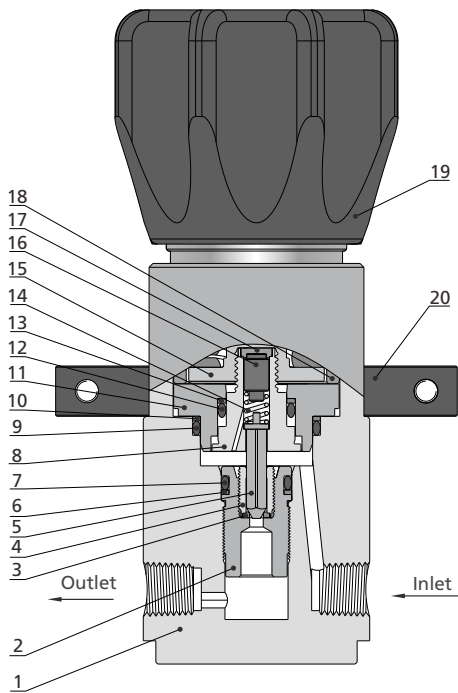

Item	Component	Material/Specification
1	Body	316 SS or 316L SS or Brass
2	Poppet	316 SS/ASTM A479
3	Seat	PEEK
4	Seat Retainer	316 SS/ASTM A479
5	Lift Poppet	S17400/A564
6	Circlip	PTFE+25%Carbon Fiber
7	O-Ring	FKM or FFKM or NBR
8	Piston	316 SS/ASTM A479
9	O-Ring	FKM or FFKM or NBR
10	Circlip	PTFE+25%Carbon Fiber
11	Piston Ring	316 SS/ASTM A479
12	O-Ring	FKM or FFKM or NBR
13	Circlip	PTFE+25%Carbon Fiber
14	Poppet Spring	316 SS/ASTM A313
15	Spring Seat	304 SS/ASTM A479
16	Spring Button	316 SS/ASTM A479
17	Seat	PEEK
18	Bonnet	304 SS/ASTM A479 or Brass
19	Handle	Aluminium Alloy
20	Clamp	Aluminium Alloy

Porting Configurations

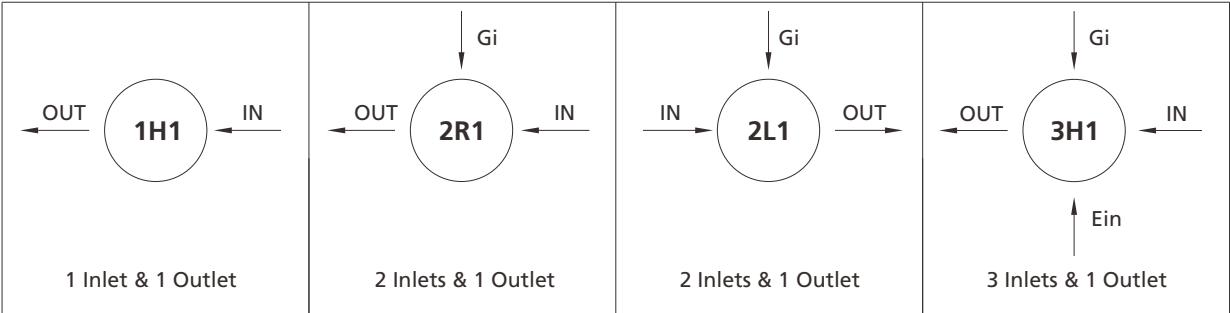


Porting Configuration Symbol

IN	OUT	Gi	Ein
Inlet	Outlet	Inlet Pressure Gauge Port	Auxiliary Inlet


- Notes:
- IN and OUT are the inlet and outlet ports for connecting the valve to the system. Ports other than IN and OUT should not be used for system connections.
 - Porting configuration is viewed from the top.

Dimensions


Dimensions, in inches (millimeters), are for reference only.

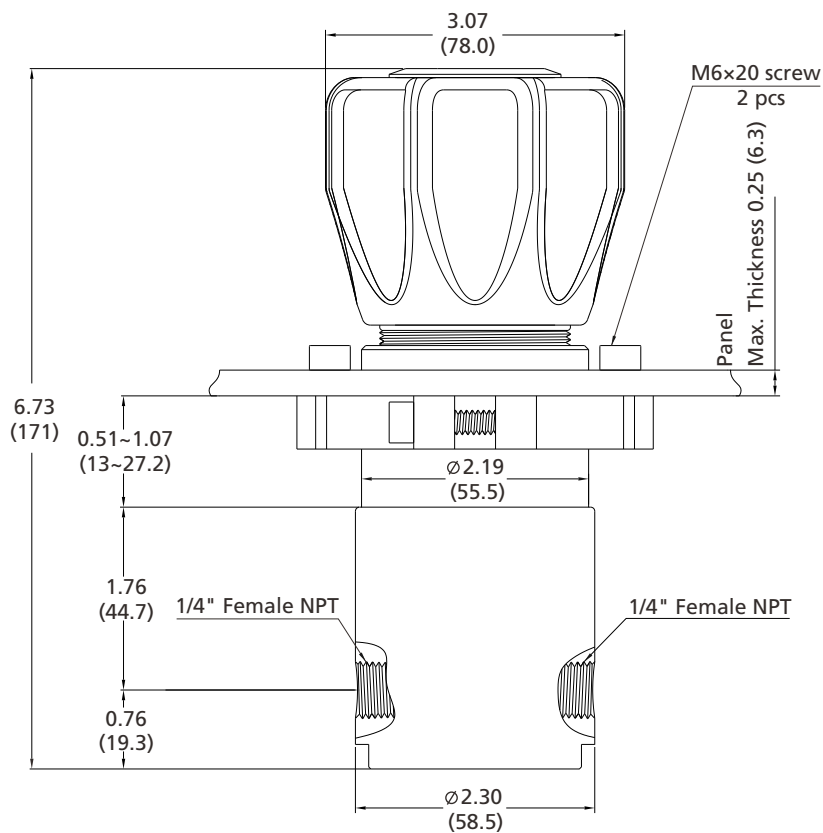


Bottom View

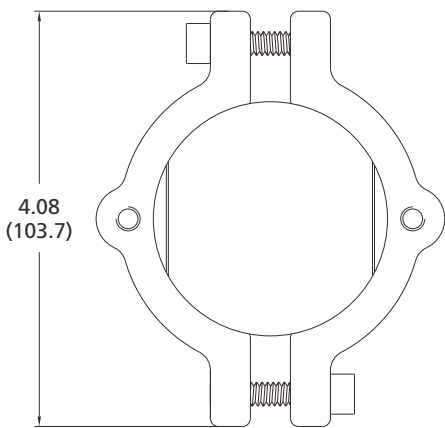

Panel Mounting Cut-Out

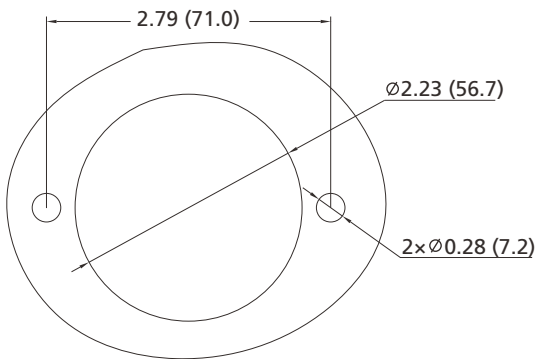

Ordering Number Description

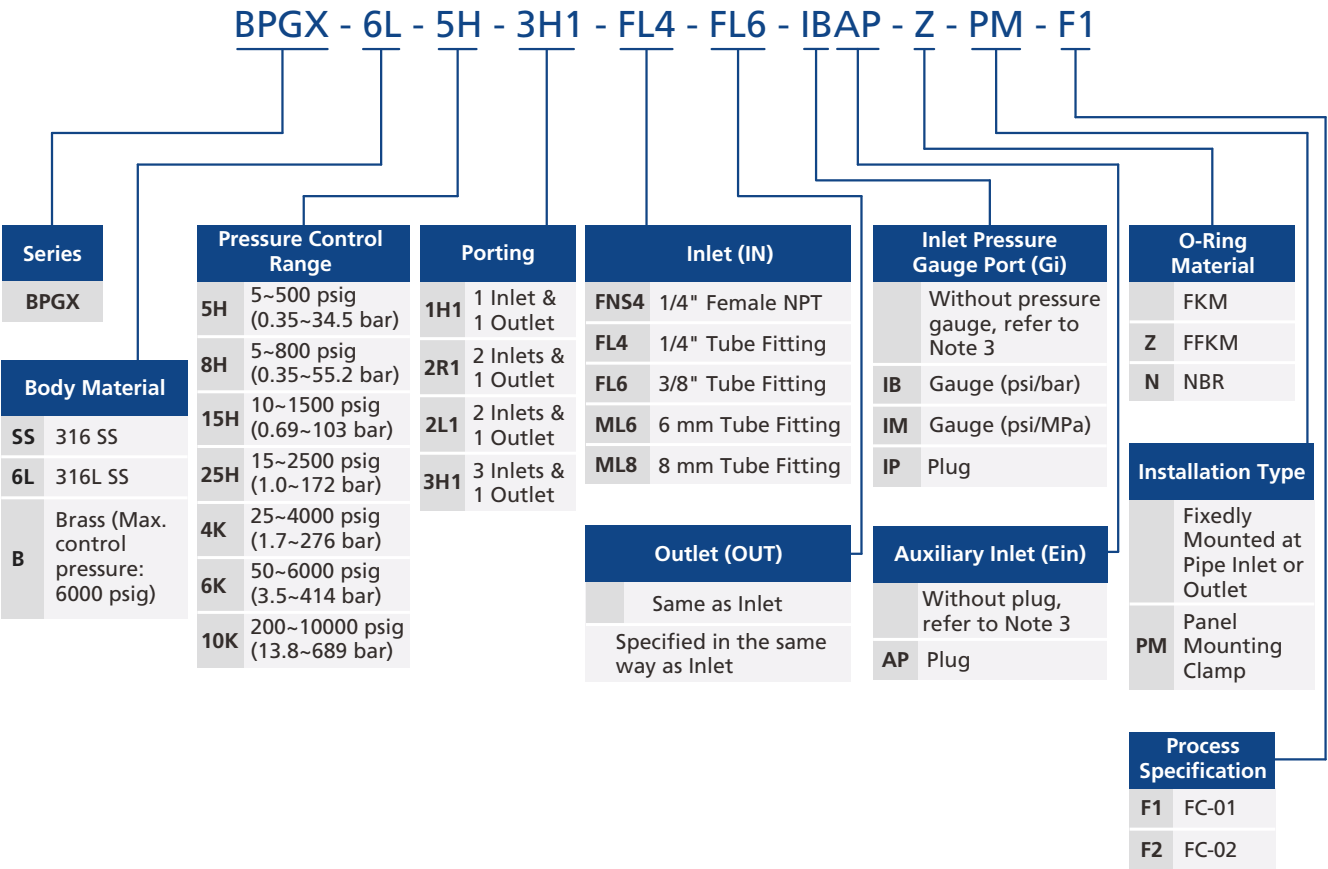

- Notes:
- 1. "Ordering Number Description" is a reference to understand the combination rules of FITOK product part number. Not all combinations are available.
 - 2. For NPT connection and Metric/Fractional Tube Fitting connection, the body connection is 1/4" Female NPT by default. Other options are adapted from Male NPT.
 - 3. Gauge connection (Gi) and auxiliary inlet (Ein) are 1/4" Female NPT.

Pressure Control Panels



Contents

Pressure Control Panels	
FSR-1 Series	A-92
FSR-2 Series	A-96

Gas Control Equipment

Related Products

Technical References

Pressure Control Panels

FSR-1 Series

Features

- ⊙ With a RDGC Series Regulator
- ⊙ With vent valves to relieve residual pressure quickly, easy and safe to remove and replace gas source
- ⊙ With special cleaning and packaging, applicable to oxygen-enriched atmospheres


Technical Data

- ⊙ Maximum inlet pressure: 3000 or 4500 psig
- ⊙ Outlet pressure range: 0 ~ 25, 0 ~ 50, 0 ~ 100, 0 ~ 250 or 0 ~ 500 psig
- ⊙ Material of the main components:
 - Seat: PCTFE (regulator and diaphragm valve)
 - Diaphragm: Hastelloy (regulator), cobalt alloy (diaphragm valve)
 - Diaphragm valve body: 316L SS
 - Filter: 316L SS
- ⊙ Temperature: -10 °F ~ 150 °F (-23 °C ~ 65 °C)
- ⊙ Valve leak rates (helium):
 - Internal: $\leq 1 \times 10^{-7}$ std cm³/s
 - External: $\leq 1 \times 10^{-9}$ std cm³/s
- ⊙ Flow coefficient (regulator Cv): 0.06




Model: FSR-16L-45-100-00-B-B-00-R-P

Typical Flow Chart


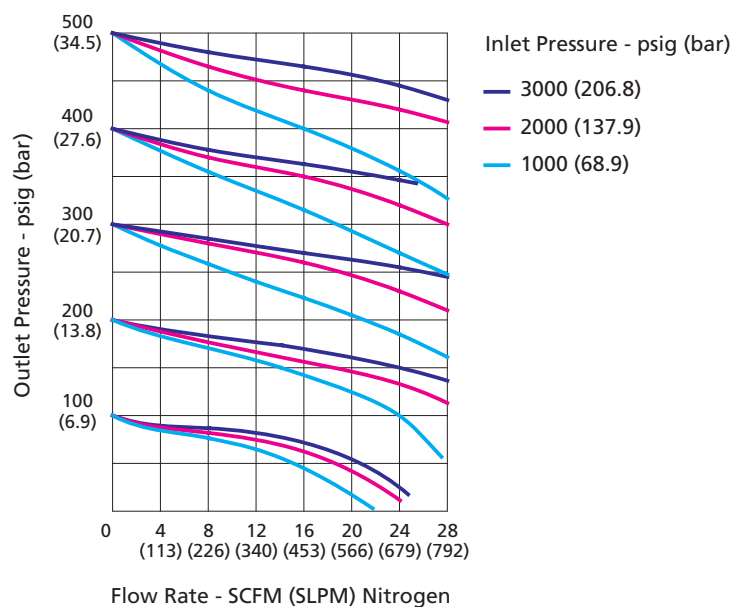


Flow Schematic

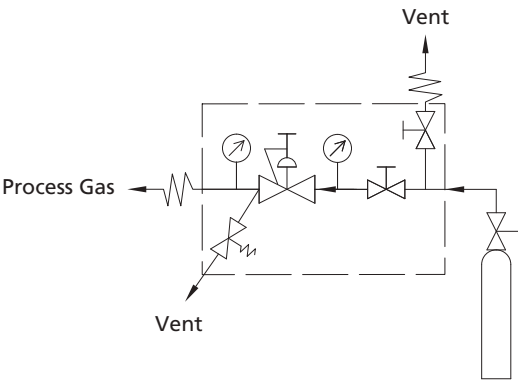


Dimensions


Dimensions, in inches (millimeters), are for reference only.

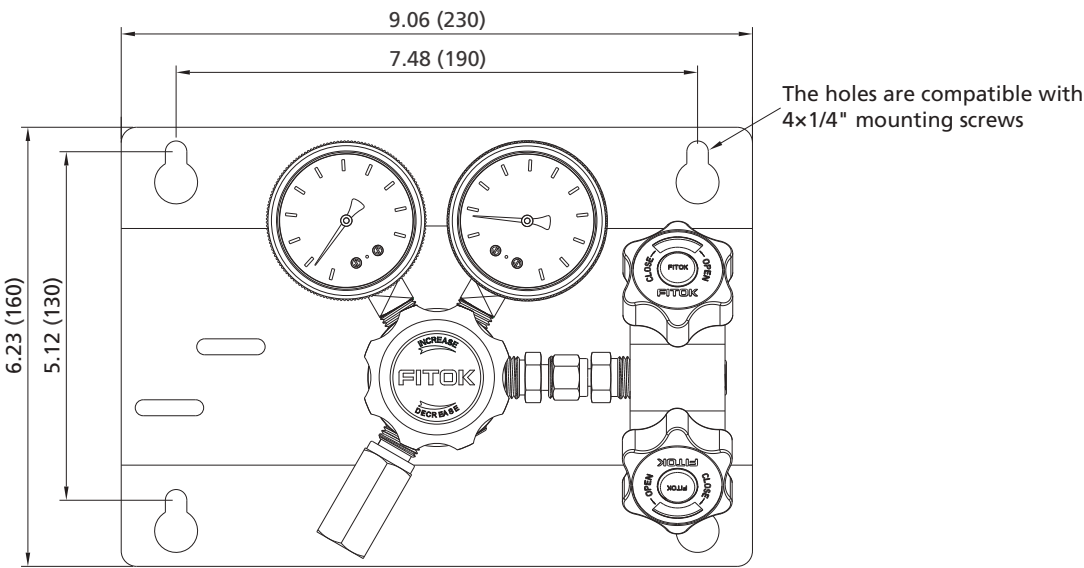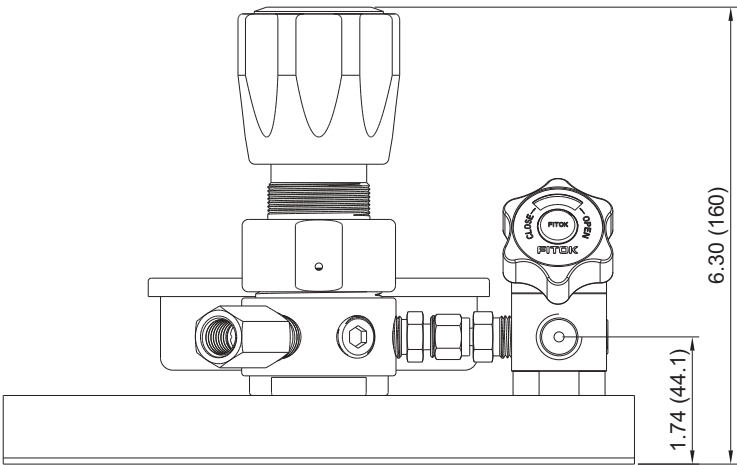

Components Introduction

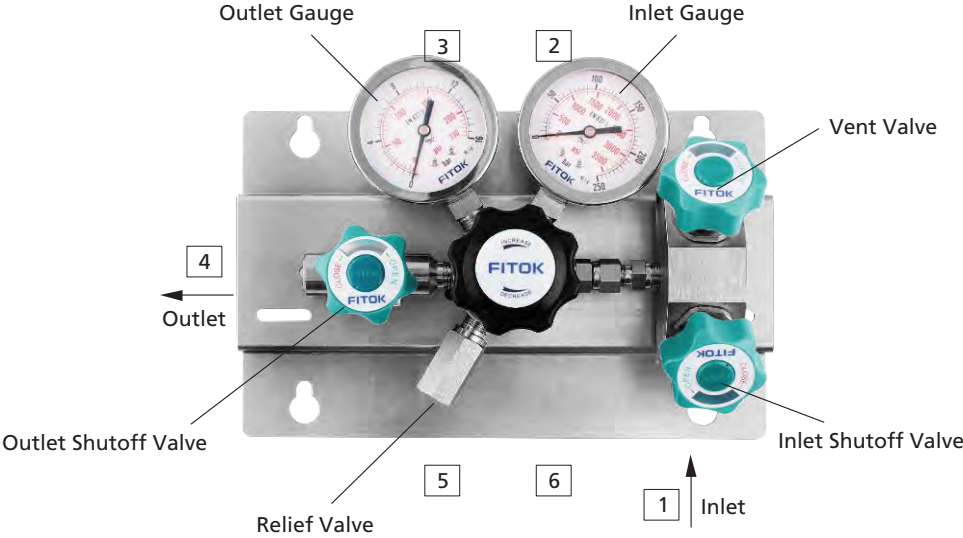

Ordering Number Description

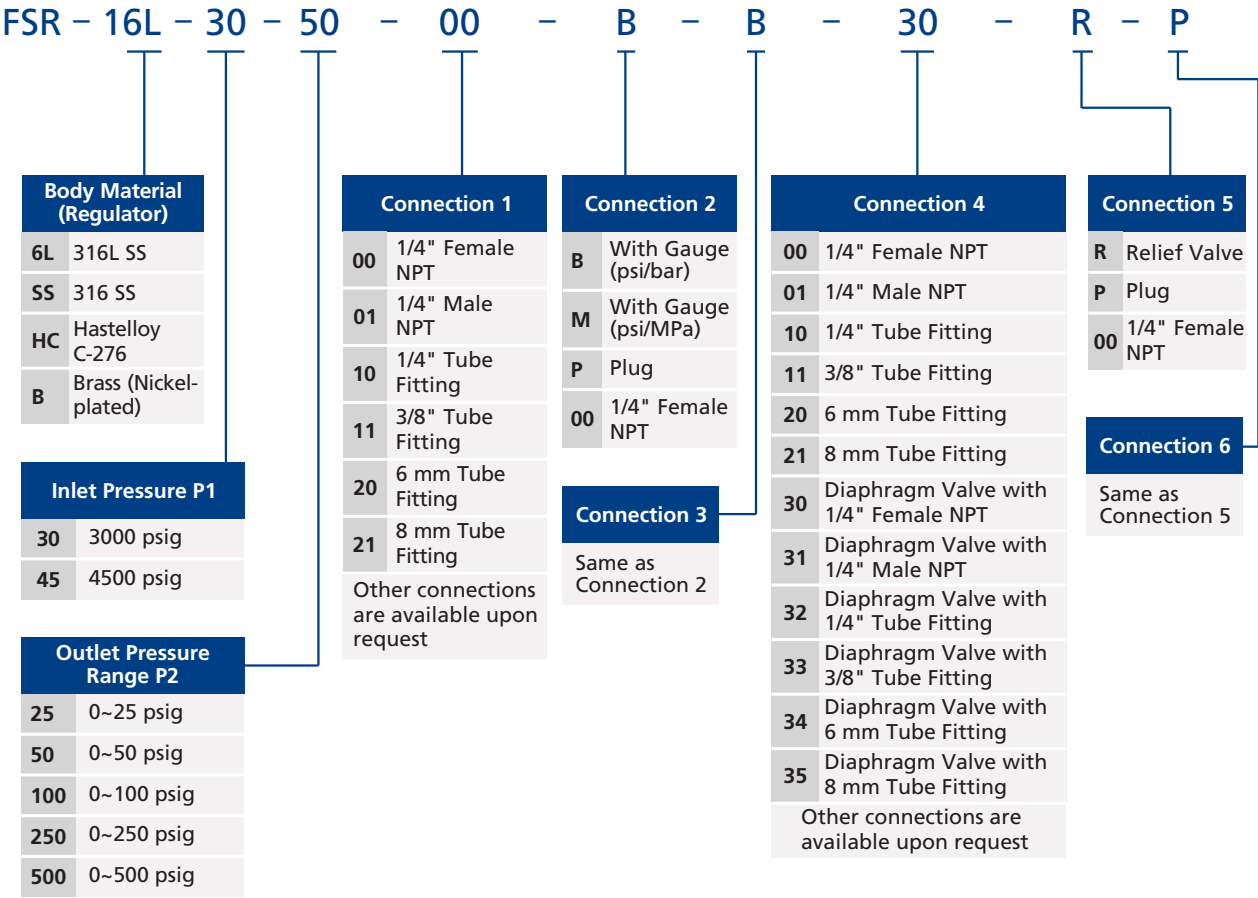

- Notes:
1. "Ordering Number Description" is a reference to understand the combination rules of FITOK product part number.
Not all combinations are available.
 2. Before ordering, please read **User's Guide** on A-12.

Pressure Control Panels

FSR-2 Series

Features

- With a RPGC Series Regulator
- With vent valves to relieve residual pressure quickly, easy and safe to remove and replace gas source
- With special cleaning and packaging, applicable to oxygen-enriched atmospheres


Technical Data

- Maximum inlet pressure: 3000 or 4500 psig
- Outlet pressure range: 0 ~ 750, 0 ~ 1500 or 0 ~ 2500 psig
- Material of the internal components:
Without venting Model: Main seat PCTFE
Venting Model: Main seat PEEK, vent seat PCTFE
Vent seat: PCTFE
Piston: 316L SS
O-ring: FKM or FFKM
Filter: 316L SS
- Temperature: -10 °F ~ 150 °F (-23 °C ~ 65 °C)
- Leak rates:
Internal: Bubble-tight
External: Bubble-tight
- Flow coefficient (regulator Cv):
Without vent: 0.06
With vent: 0.1




Model: FSR-2Z6L-45-750-00-B-B-00-P-P

Typical Flow Chart


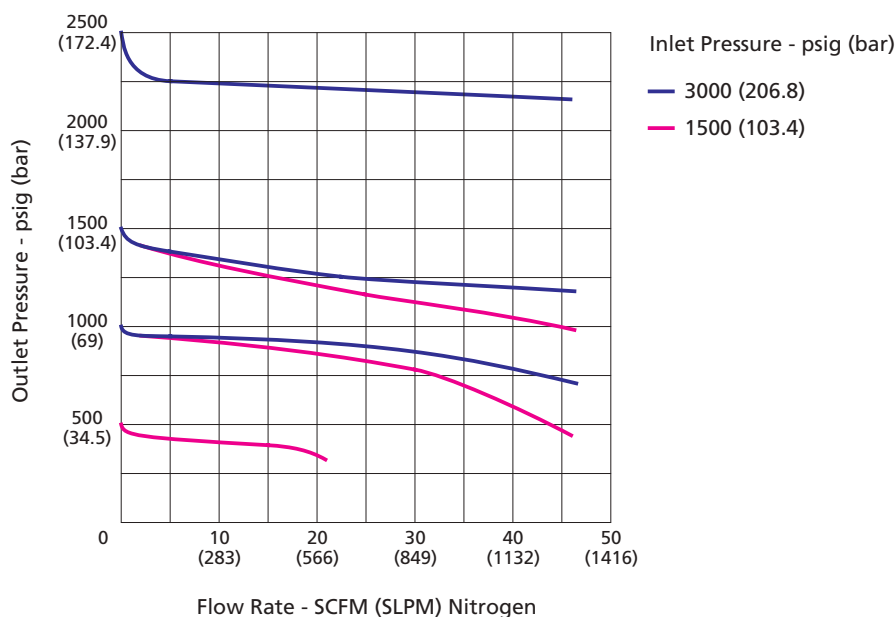


Flow Schematic

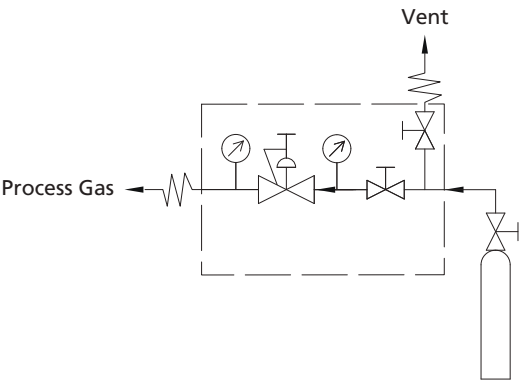


Dimensions

Dimensions, in inches (millimeters), are for reference only.

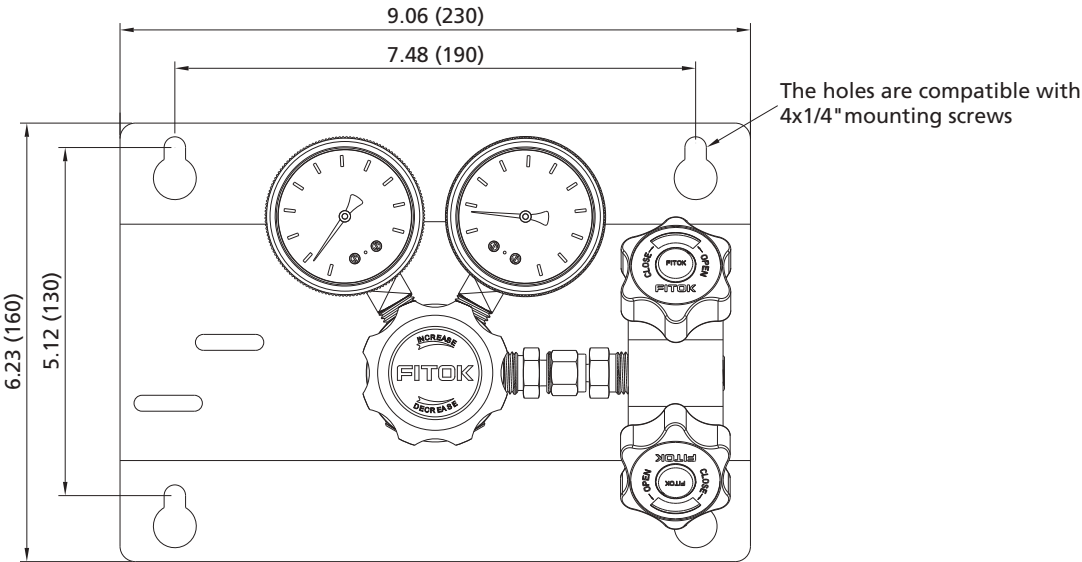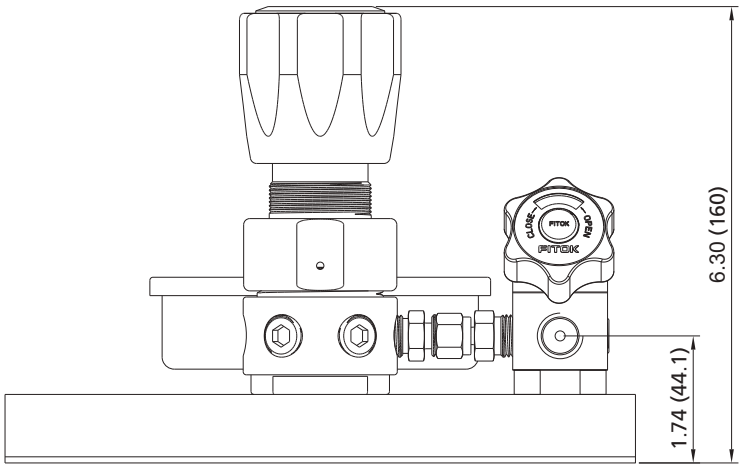

Components Introduction

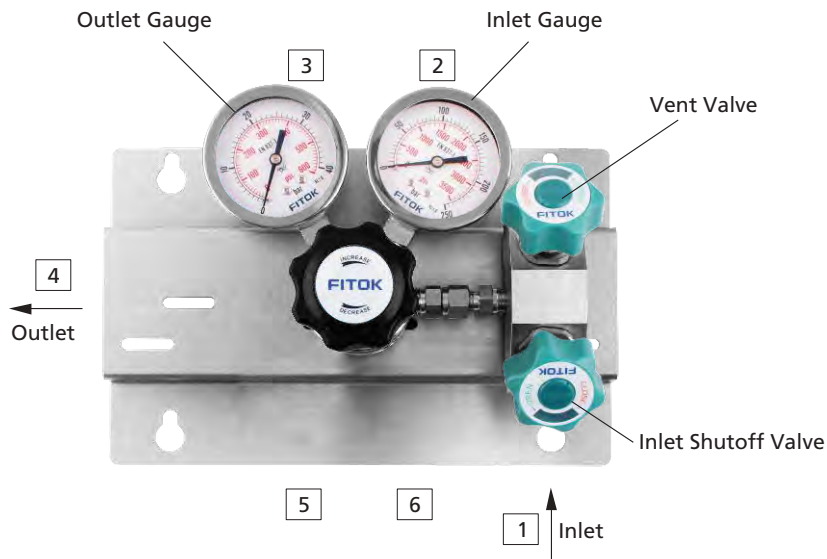

Ordering Number Description

FSR – 2V Z 6L – 30 – 1500 – 00 – B – B – 30 – P – P					
Vent Option		Inlet Pressure P1		Connection 1	
	Without	30	3000 psig	00	1/4" Female NPT
V	With	45	4500 psig	01	1/4" Male NPT
O-ring Material		Outlet Pressure Range P2		10	1/4" Tube Fitting
	FKM	750	0~750 psig	11	3/8" Tube Fitting
Z	FFKM	1500	0~1500 psig	20	6 mm Tube Fitting
Body Material (Regulator)		2500	0~2500 psig	21	8 mm Tube Fitting
6L	316L SS	Other connections are available upon request			
SS	316 SS				
B	Brass (Nickel-plated)				
		Connection 2		Connection 4	
		B	With Gauge (psi/bar)	00	1/4" Female NPT
		M	With Gauge (psi/MPa)	01	1/4" Male NPT
		P	Plug	10	1/4" Tube Fitting
		00	1/4" Female NPT	11	3/8" Tube Fitting
		Connection 3		20	6 mm Tube Fitting
		Same as Connection 2		21	8 mm Tube Fitting
				30	Diaphragm Valve with 1/4" Female NPT
				31	Diaphragm Valve with 1/4" Male NPT
				32	Diaphragm Valve with 1/4" Tube Fitting
				33	Diaphragm Valve with 3/8" Tube Fitting
				34	Diaphragm Valve with 6 mm Tube Fitting
				35	Diaphragm Valve with 8 mm Tube Fitting
				Other connections are available upon request	
				Connection 5	
				R	Relief Valve
				P	Plug
				00	1/4" Female NPT
				Connection 6	
				Same as Connection 5	

- Notes:
1. "Ordering Number Description" is a reference to understand the combination rules of FITOK product part number. Not all combinations are available.
 2. Before ordering, please read **User's Guide** on A-12.

Changeover Systems



Contents

Manual Changeover System	
FDR-1 Series	A-101
FDR-2 Series	A-104
Automatic Changeover System	
CEPR Series	A-107
FDR-1L Series	A-111
DPPR Series	A-115
FDR-1T Series	A-119

Manual Changeover Systems

FDR-1 Series

Features

- Two gas sources are connected to the system, when the pressure of one gas source is lower than the switching pressure, manually switch to the other gas source to ensure continuous gas supply
- With vent valves to relieve residual pressure quickly, easy and safe to remove and replace gas source
- With special cleaning and packaging, applicable to oxygen-enriched atmospheres




Model: FDR-16L-30-500-00-B-B-01-00-R


Technical Data

- Maximum inlet pressure: 3000 or 4500 psig
- Outlet pressure range: 0 ~ 25, 0 ~ 50, 0 ~ 100, 0 ~ 250 or 0 ~ 500 psig
- Material of the main components:
 - Seat: PCTFE (regulator and diaphragm valve)
 - Diaphragm: Hastelloy (regulator), cobalt alloy (diaphragm valve)
 - Diaphragm valve body: 316L SS
 - O-ring: FKM
- Temperature: -10 °F ~ 150 °F (-23 °C ~ 65 °C)
- Valve leak rates (helium):
 - Internal: $\leq 1 \times 10^{-7}$ std cm³/s
 - External: $\leq 1 \times 10^{-9}$ std cm³/s
- Flow coefficient (regulator Cv): 0.06

Typical Flow Chart

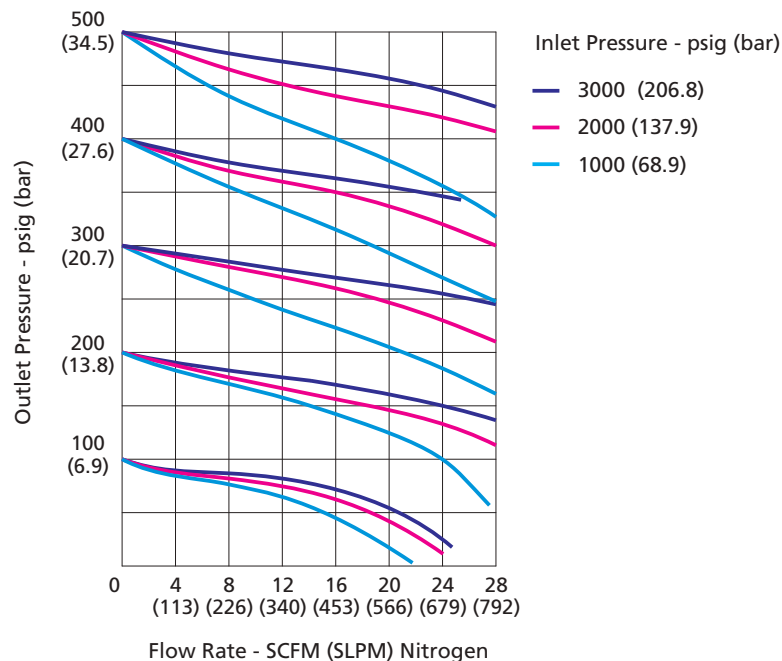


Flow Schematic

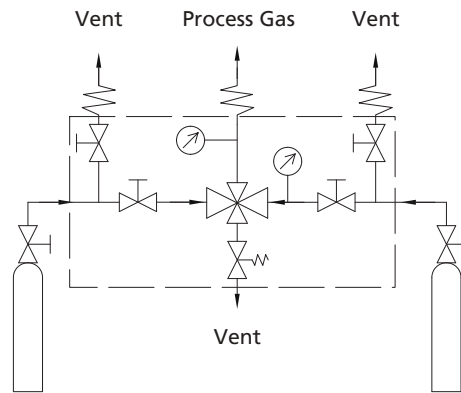


Dimensions

Dimensions, in inches (millimeters), are for reference only.

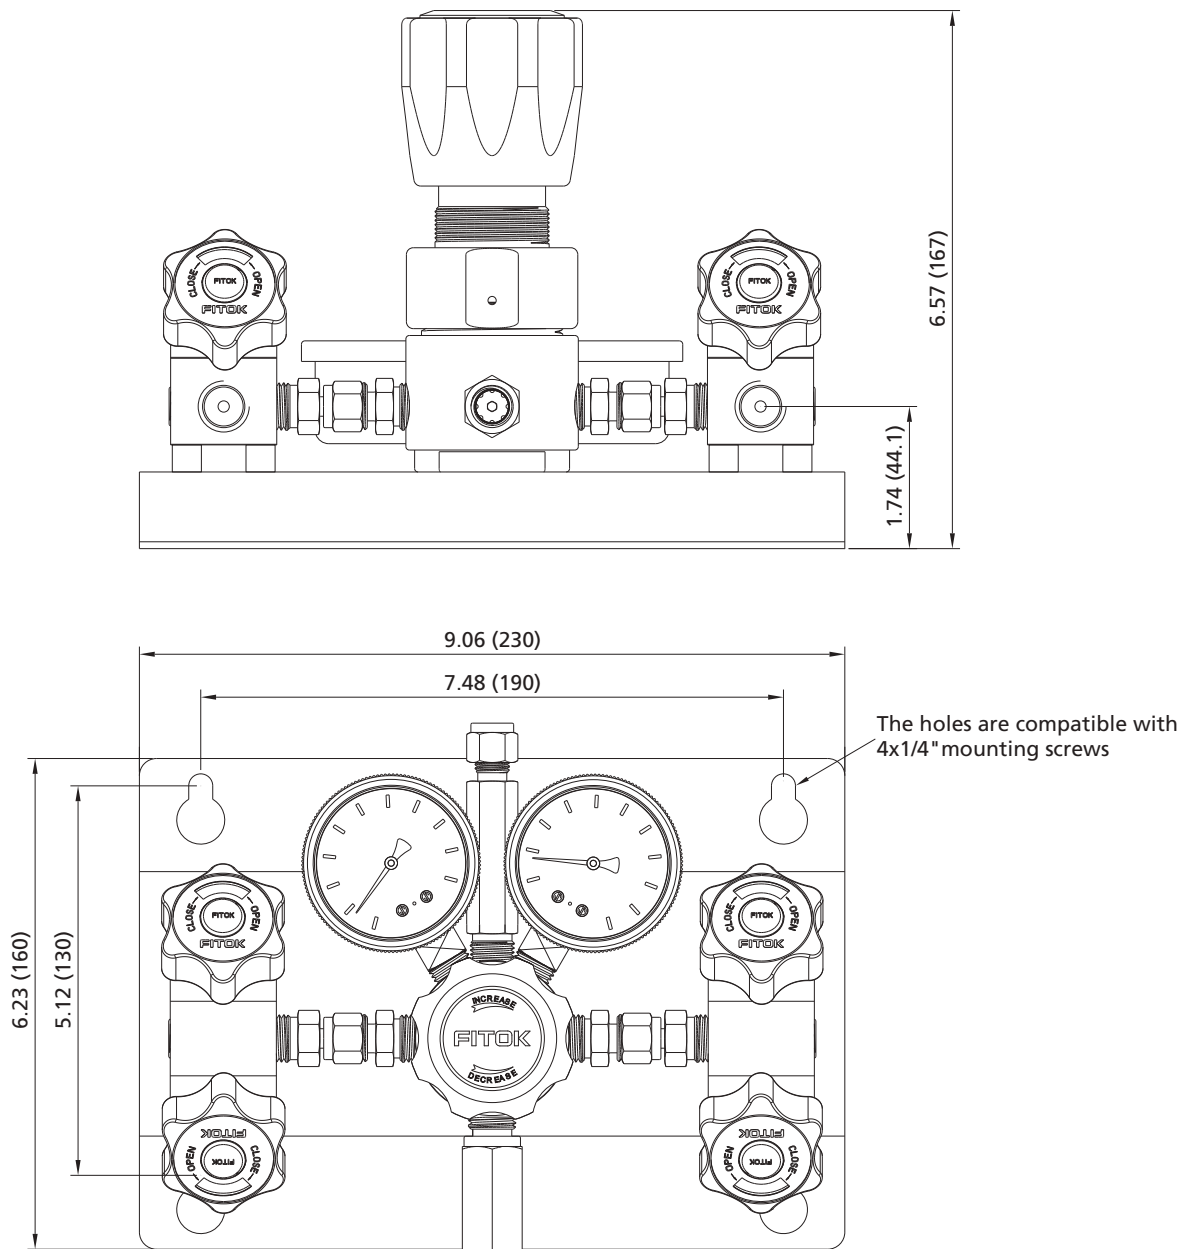

Components Introduction

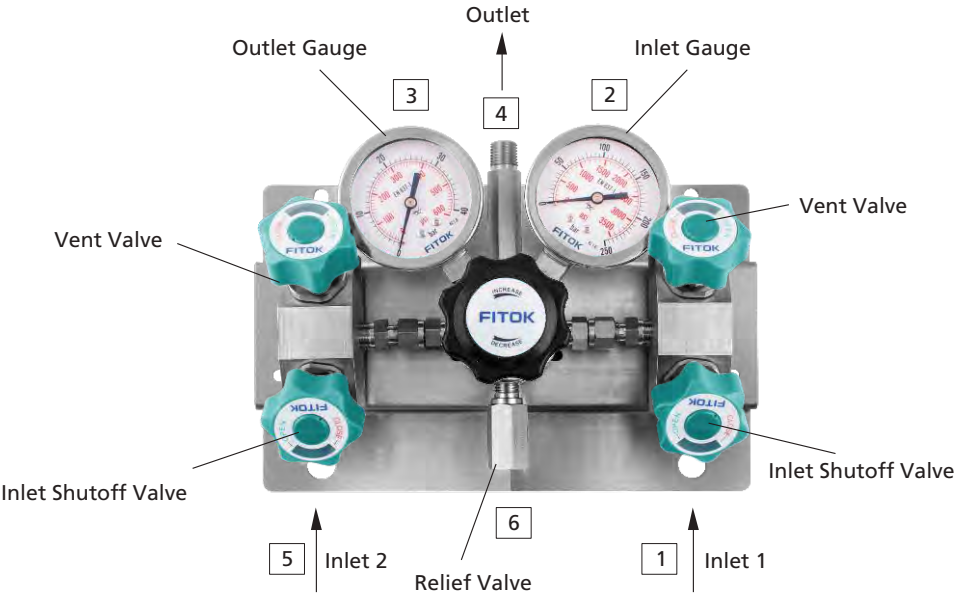

Ordering Number Description

FDR – 16L – 30 – 250 – 00 – B – B – 01 – 00 – R

Body Material (Regulator)	
6L	316L SS
SS	316 SS
HC	Hastelloy C-276
B	Brass (Nickel-plated)

Inlet Pressure P1	
30	3000 psig
45	4500 psig

Outlet Pressure Range P2	
25	0~25 psig
50	0~50 psig
100	0~100 psig
250	0~250 psig
500	0~500 psig

Connection 1	
00	1/4" Female NPT
01	1/4" Male NPT
10	1/4" Tube Fitting
11	3/8" Tube Fitting
20	6 mm Tube Fitting
21	8 mm Tube Fitting
Other connections are available upon request	

Connection 2	
B	With Gauge (psi/bar)
M	With Gauge (psi/MPa)
P	Plug
00	1/4" Female NPT

Connection 3	
Same as Connection 2	

Connection 4	
00	1/4" Female NPT
01	1/4" Male NPT
10	1/4" Tube Fitting
11	3/8" Tube Fitting
20	6 mm Tube Fitting
21	8 mm Tube Fitting
Other connections are available upon request	

Connection 6	
R	Relief Valve
P	Plug
00	1/4" Female NPT

Connection 5	
Same as Connection 1	

- Notes:
- 1. "Ordering Number Description" is a reference to understand the combination rules of FITOK product part number. Not all combinations are available.
 - 2. Before ordering, please read **User's Guide** on A-12.

Manual Changeover System

FDR-2 Series

Features

- Two gas sources are connected to the system, when the pressure of one gas source is lower than the switching pressure, manually switch to the other gas source to ensure continuous gas supply
- With vent valves to relieve residual pressure quickly, easy and safe to remove and replace gas source
- With special cleaning and packaging, applicable to oxygen-enriched atmospheres


Technical Data

- Maximum inlet pressure: 3000 or 4500 psig
- Outlet pressure range: 0 ~ 750, 0 ~ 1500 or 0 ~ 2500 psig
- Material of the main components:
 - Seat: PCTFE (regulator and diaphragm valve)
 - Piston: 316L SS
 - Diaphragm: cobalt alloy (diaphragm valve)
 - Diaphragm valve body: 316L SS
 - O-ring: FKM or FFKM
 - Filter: 316L SS
- Temperature: -10 °F ~ 150 °F (-23 °C ~ 65 °C)
- Leak rates:
 - Internal: Bubble-tight
 - External: Bubble-tight
- Flow coefficient (regulator Cv):
 - Without vent: 0.06
 - Vent: 0.1




Model: FDR-2VSS-45-2500-00-B-B-01-00

Typical Flow Chart

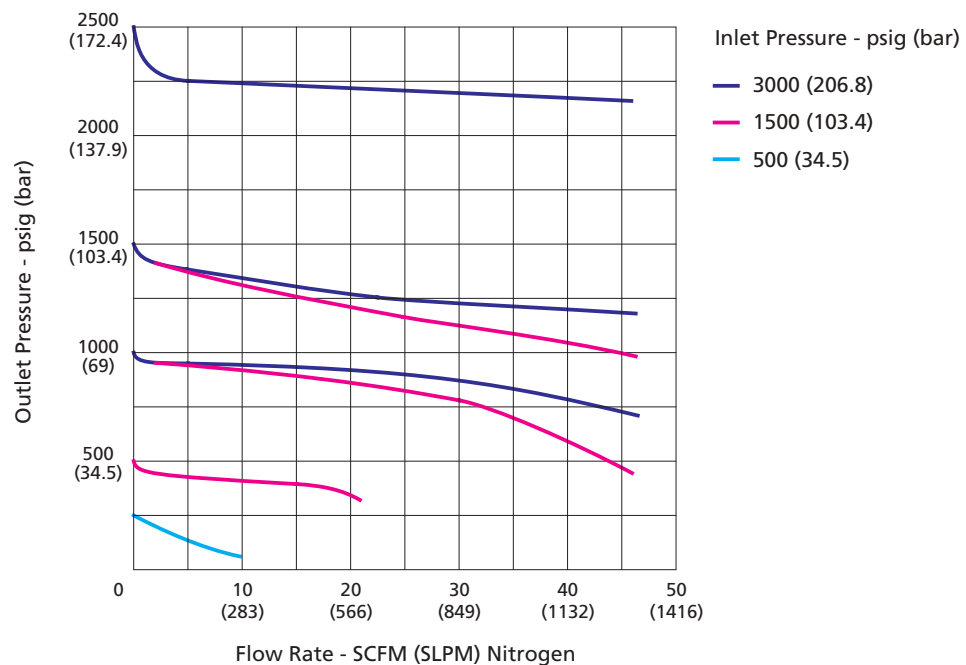


Flow Schematic

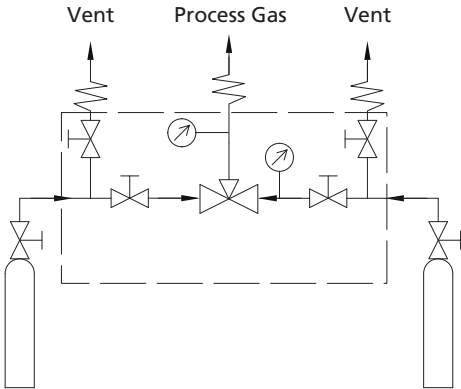


Dimensions

Dimensions, in inches (millimeters), are for reference only.

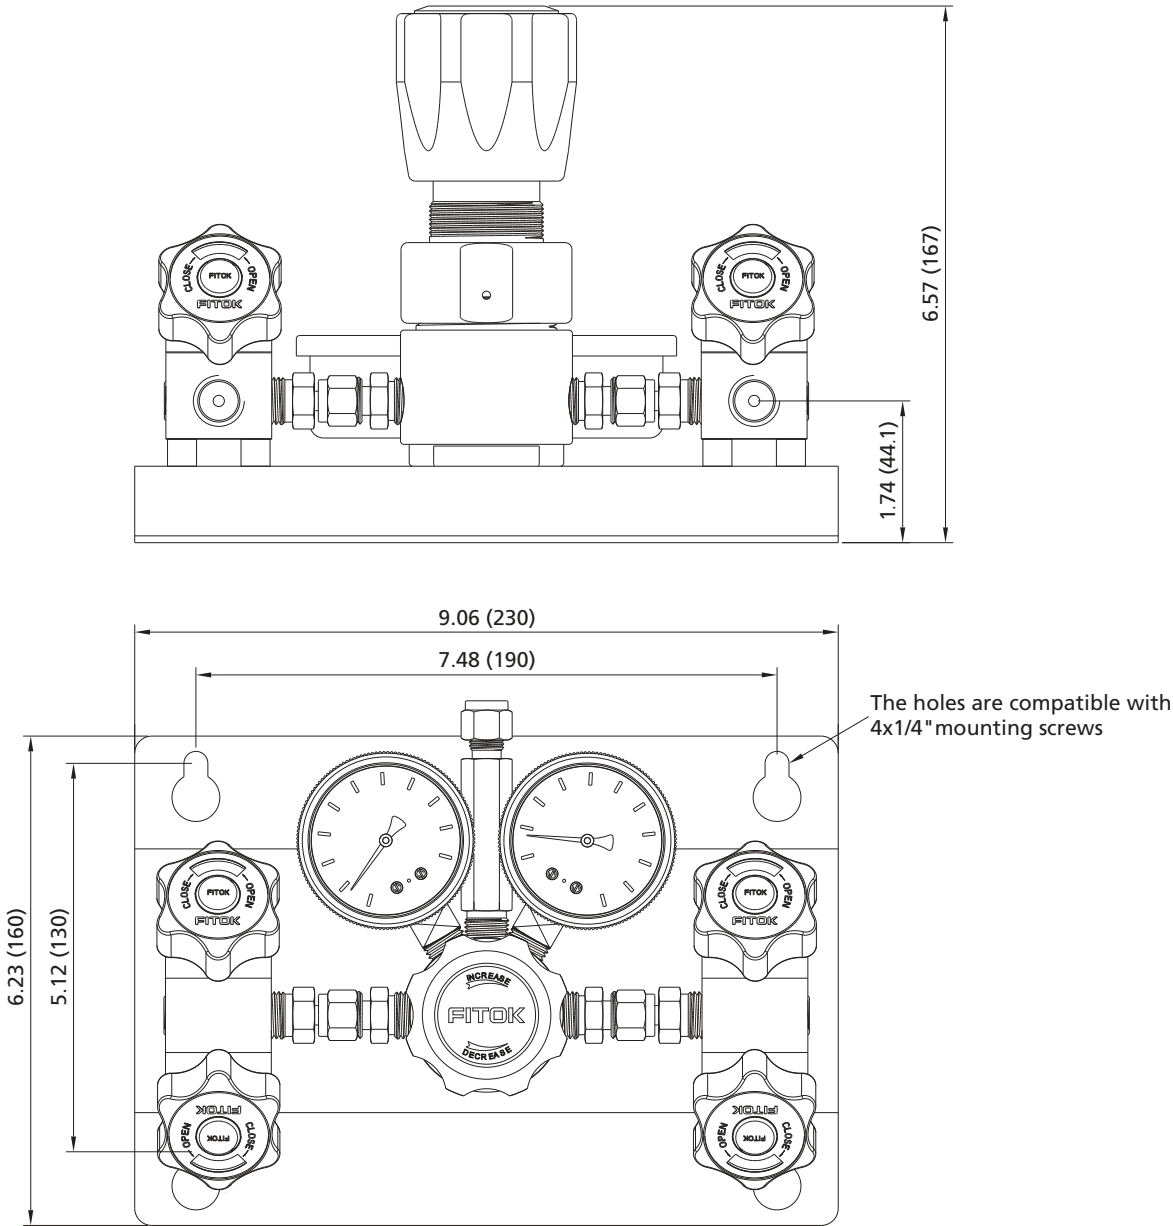

Components Introduction

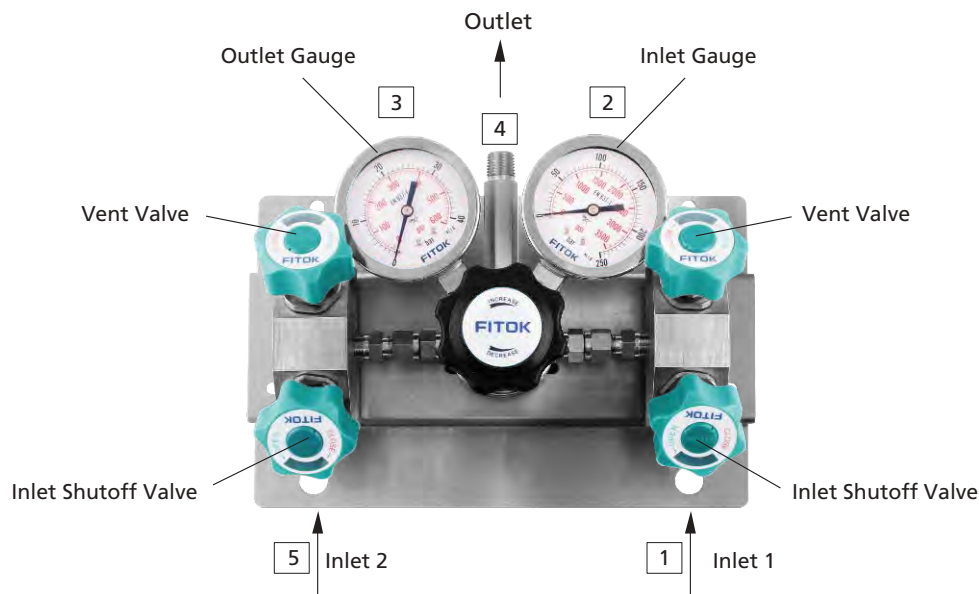

Ordering Number Description

FDR - 2V Z 6L - 30 - 750 - 00 - B - B - 01 - 00

Vent Option	Inlet Pressure P1	Connection 1	Connection 2	Connection 4	Connection 5
Without	30 3000 psig	00 1/4" Female NPT	B With Gauge (psi/bar)	00 1/4" Female NPT	Same as Connection 1
V With	45 4500 psig	01 1/4" Male NPT	M With Gauge (psi/MPa)	01 1/4" Male NPT	
O-ring Material	Outlet Pressure Range P2	10 1/4" Tube Fitting	P Plug	10 1/4" Tube Fitting	
FKM	750 0~750 psig	11 3/8" Tube Fitting	00 1/4" Female NPT	11 3/8" Tube Fitting	
Z FFKM	1500 0~1500 psig	20 6 mm Tube Fitting		20 6 mm Tube Fitting	
Body Material (Regulator)	2500 0~2500 psig	21 8 mm Tube Fitting	Connection 3	21 8 mm Tube Fitting	
6L 316L SS		Other connections are available upon request	Same as Connection 2	Other connections are available upon request	
SS 316 SS					
B Brass (Nickel-plated)					

Notes:

- "Ordering Number Description" is a reference to understand the combination rules of FITOK product part number.
Not all combinations are available.
- Before ordering, please read **User's Guide** on A-12.

Automatic Changeover System

CEPR Series

The CEPR series automatic changeover system, suitable for uninterrupted gas supply, uses dual gas sources of main supply cylinder and backup cylinder. When the pressure of one gas source drops below the set pressure, the changeover system will automatically switch from the depleted source to the backup source, thus achieving a continuous gas supply.

Features

- Two gas sources are connected to regulators of the automatic changeover system, when the pressure of one gas source is lower than the switching pressure, it will automatically switch to the other gas source to supply gas, thus ensuring continuous gas supply.
- Excellent sensitivity and set point pressure stability.



Technical Data

- Maximum inlet pressure: 3000 psig
- Nominal changeover pressure: 100, 150, 200 and 250 psig
- Outlet pressure ranges: 85 ~ 115, 135 ~ 165, 185 ~ 215, 235 ~ 265 psig
- Material of the internal components:
 - Seat: PCTFE
 - Diaphragm: Hastelloy
 - Filter: 316L SS
- Working Temperature: -40 °F ~ 165 °F (-40 °C ~ 74 °C)
- Valve leak rates (helium):
 - Internal: Bubble-tight
 - External: $\leq 2 \times 10^{-8}$ std cm³/s
- Flow coefficient (Cv): 0.06
- Weight: ≈ 5.07 lbs (2.3 kg)




Dimensions

Dimensions, in inches (millimeters), are for reference only.

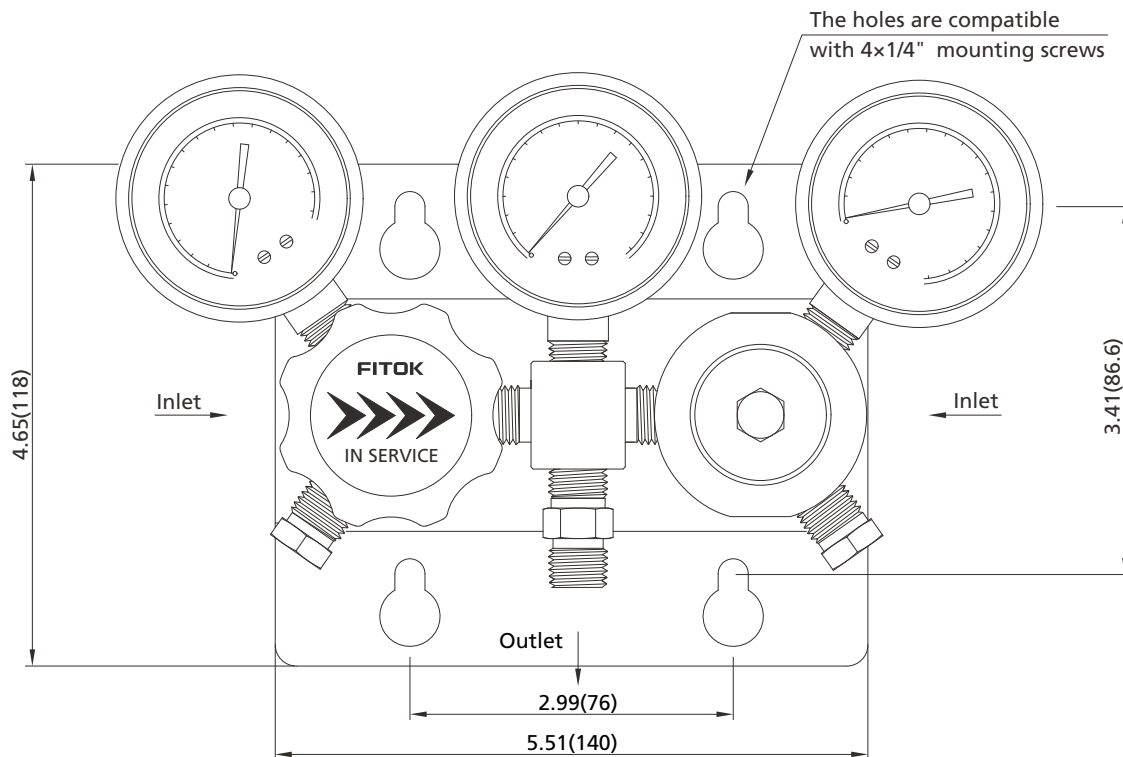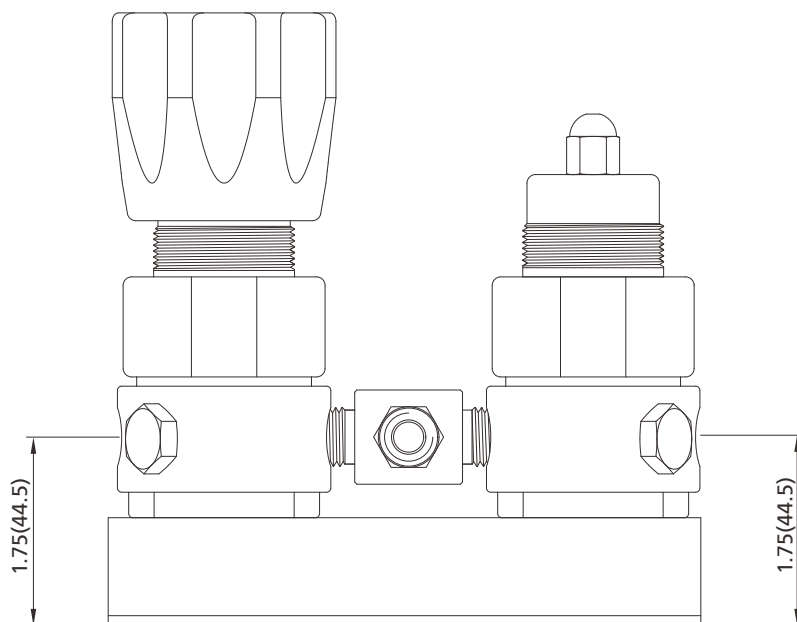


Operation Overview

The CEPR series changeover system consists of two separate regulators. The two regulators are respectively attached to separate source cylinders. One of the regulators has an adjusting handle which can swivel to enable source side selection. The other regulator is preset to an appropriate setting for the system outlet range. The source selection handle adjusts the outlet pressure to be either above or below the preset side within 15 ~ 30 psig. When the handle is turned to point to the standby side, the standby side continues to supply gas due to the change in differential pressure to achieve continuous and uninterrupted gas supply. When one supply drops below the changeover pressure, the selector regulator automatically switches the gas feed from the depleted supply to an alternate supply.

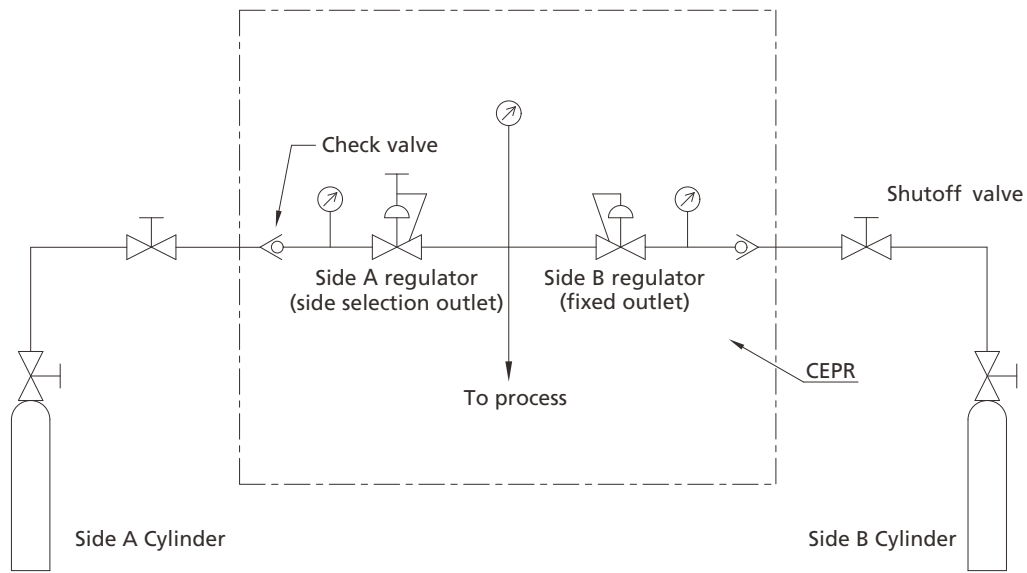

Ordering Number Description

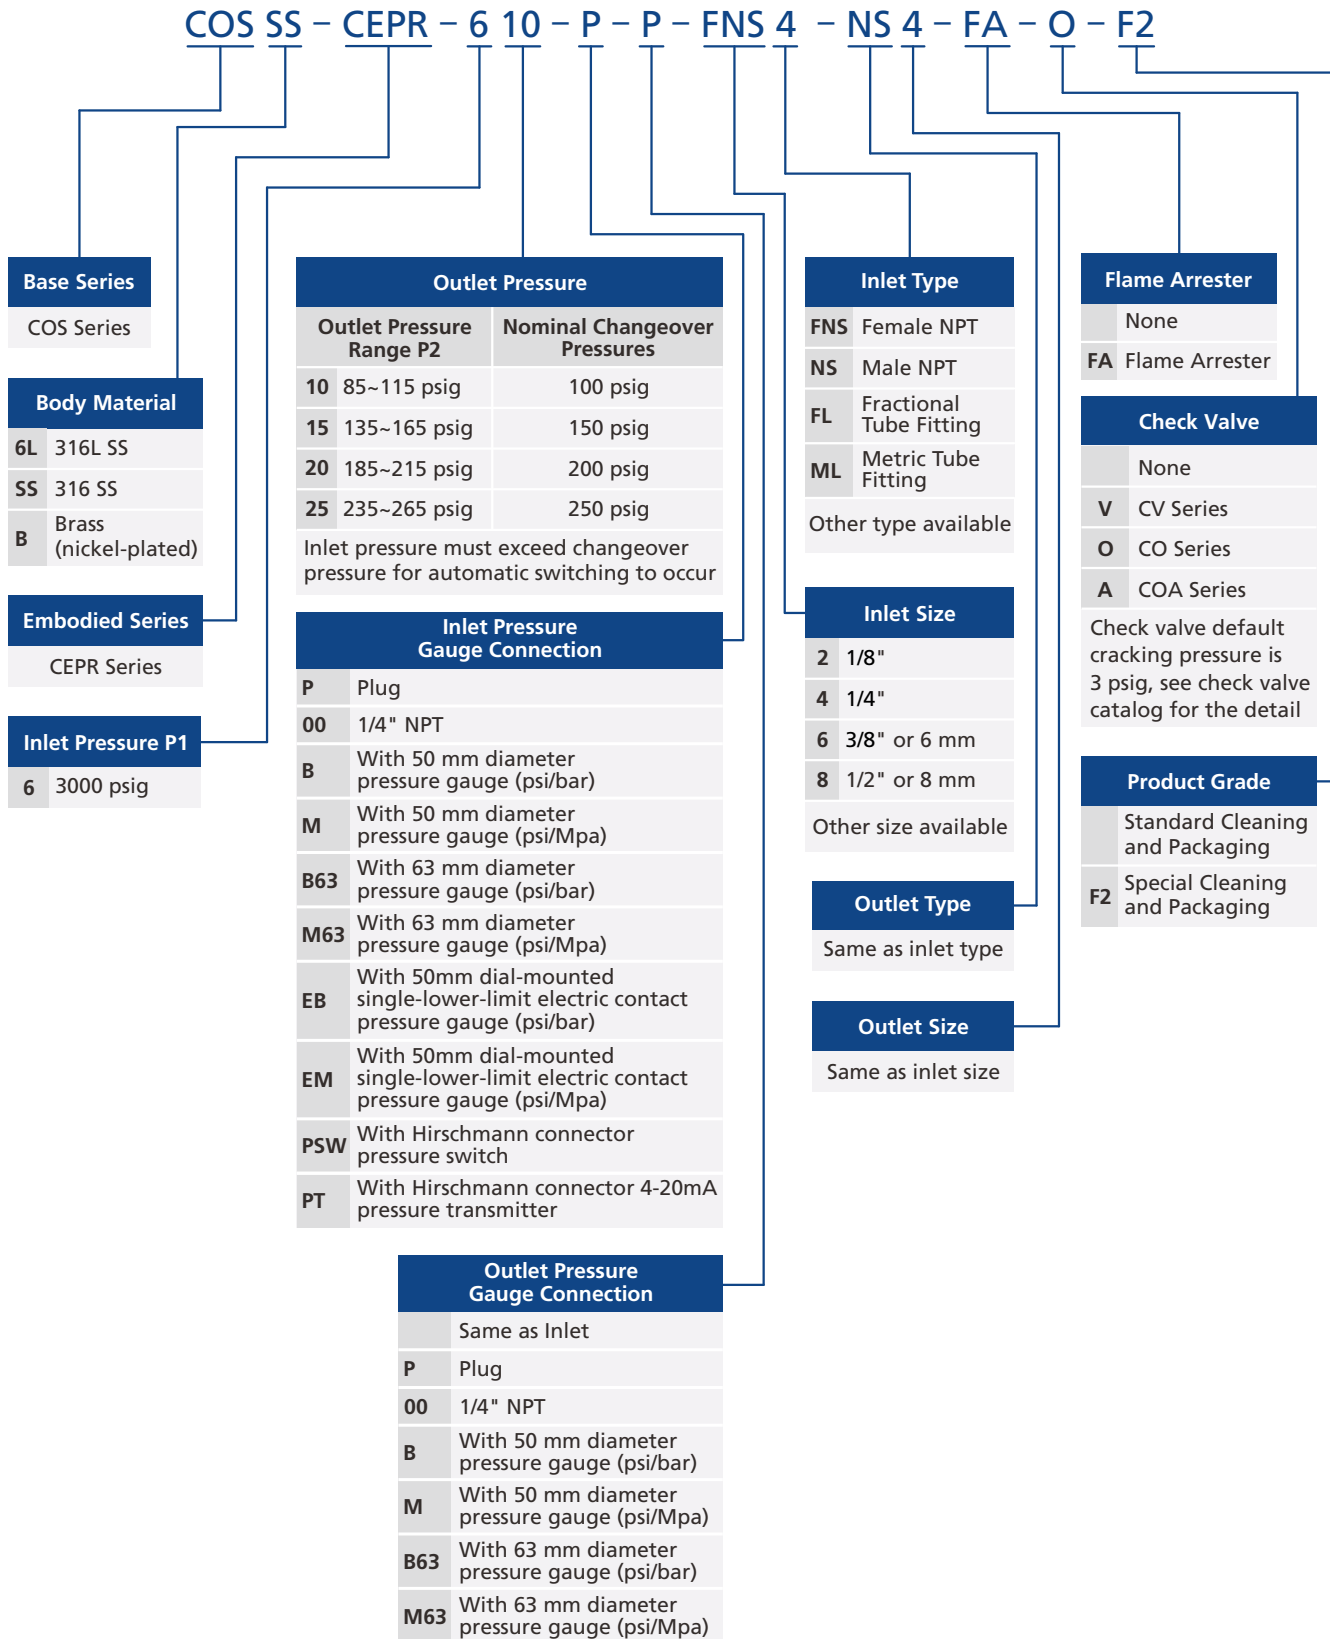

Notes:

1. "Ordering Number Description" is a reference to understand the combination rules of FITOK product part number. Not all combinations are available.
2. Before ordering, please read **User's Guide** on A-12.
3. For EB/EM/PSW/PT/FA options, please consult our engineers with specific application details (medium, pressure, flow rate, temperature) for configuration confirmation.

Automatic Changeover Systems

FDR-1L Series

Features

- With CEPR series automatic changeover device
- With vent valves to relieve residual pressure quickly, easy and safe to remove and replace gas source
- With special cleaning and packaging, applicable to oxygen-enriched atmospheres




Model: FDR-1L6L-30-10-B-00-00-00

Technical Data

- Maximum inlet pressure: 3000 or 4500 psig
- Nominal changeover pressure: 100, 150, 200 and 250 psig
- Outlet pressure range: 85 ~ 115, 135 ~ 165, 185 ~ 215 or 235 ~ 265 psig
- Material of the main components:
 Seat: PCTFE (regulator and diaphragm valve)
 Diaphragm: Hastelloy (regulator), cobalt alloy (diaphragm valve)
 Diaphragm valve body: 316L SS
- Temperature: -10 °F ~ 150 °F (-23 °C ~ 65 °C)
- Valve leak rates (helium):
 Internal: $\leq 1 \times 10^{-7}$ std cm³/s
 External: $\leq 1 \times 10^{-9}$ std cm³/s
- Flow coefficient (regulator Cv): 0.06
- Weight: ≈ 12.1 lbs (5.5 kg)

Flow Schematic

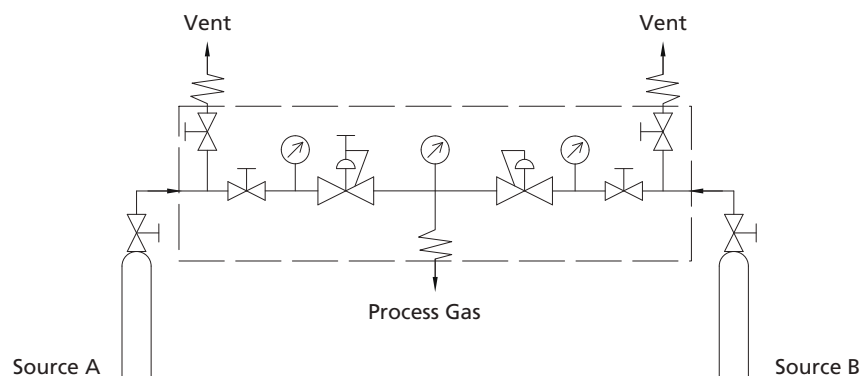

Operation Overview

The FDR-1L Series Changeover System is mainly comprised of one adjustable outlet pressure regulator together with one fixed outlet pressure regulator.

When the 2 inlets are both open, the one side that the "IN SERVICE" arrow is pointing at by turning the handle would be the 1st source for gas supply.

Fig. 1 When the "In Service" arrow is pointing at side B, side B would be the gas source. At this time, the fixed outlet pressure of side B is higher than the set pressure of side A. Consequently, the diaphragm of side A regulator moves to enable the stem to close the regulator.

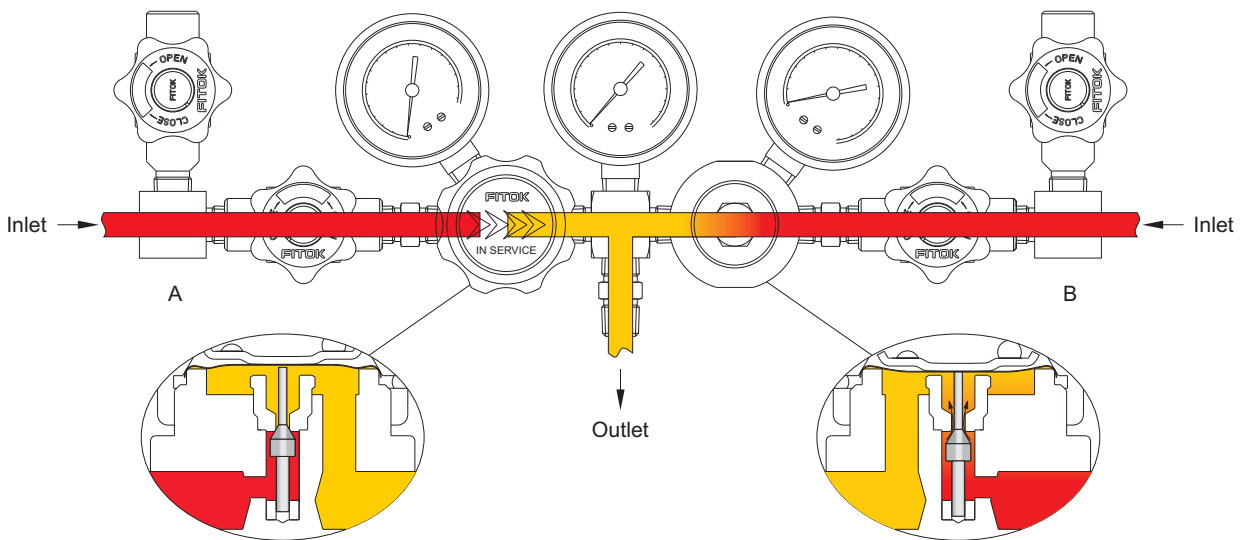


Fig. 1

Fig. 2 If side A is chosen as the gas source, the handle should be turned clockwise until the "IN SERVICE" arrow is pointing at side A. At this time, the set pressure of side A is higher than the fixed outlet pressure of side B. Consequently, the diaphragm of side B regulator moves to enable stem to close the regulator.

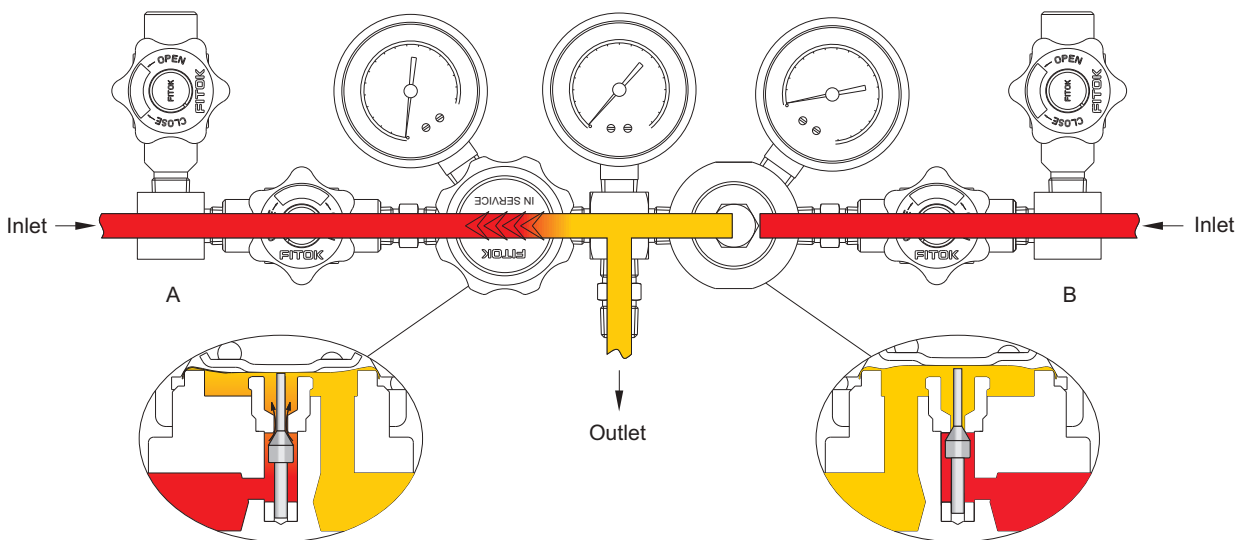


Fig. 2

When gas source of one side is depleted, gas source would automatically change to the other side.

Fig. 1 When "IN SERVICE" arrow is pointing at side B, but gas source of side B is depleted, its outlet pressure shall decrease to be lower than the set pressure of side A. By the force of spring, side A regulator will be opened to begin gas supply as shown in Fig. 3

Gas from side A will flow back into side B. At this time, replace to a new gas source of side B, close the shutoff valve and open the vent valve to exhaust the remaining pressure, then replace to a new gas source. After the replacement, if not rotating the handle, the gas supply will return to the status as of Fig. 1. And if rotating the handle to the status as shown in Fig. 2, the gas supply will be changed to the status as of Fig. 2.



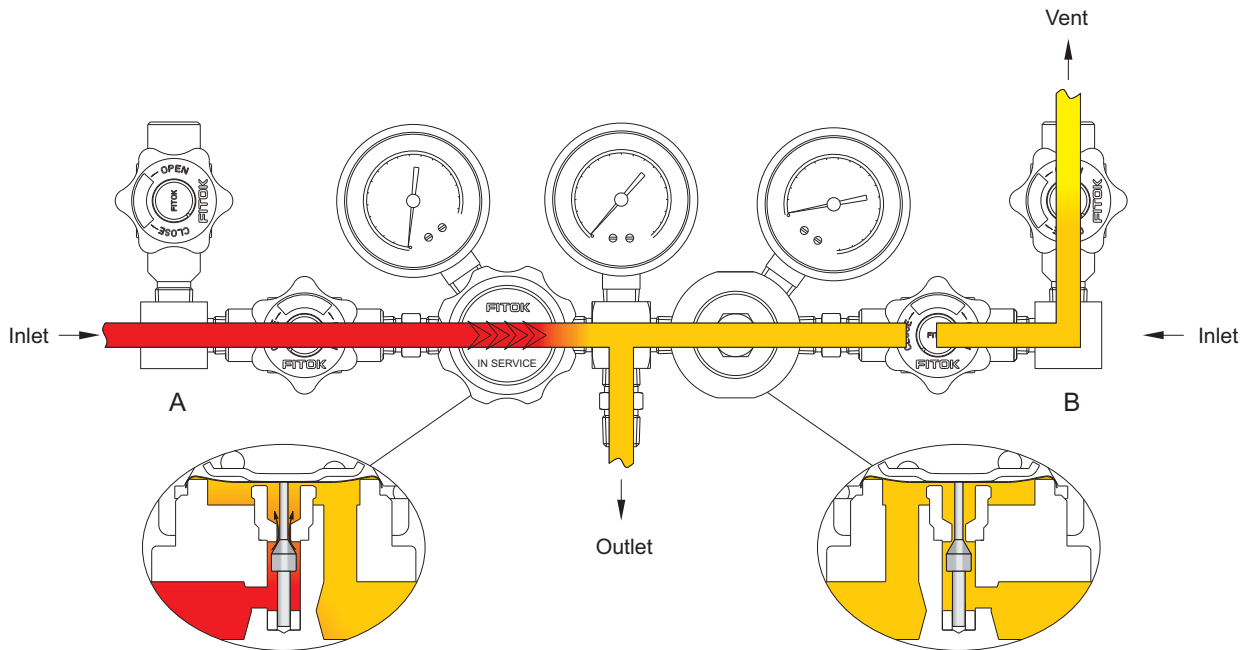


Fig. 3

Dimensions

Dimensions, in inches (millimeters), are for reference only.

The holes are compatible with 4x1/4" mounting screws

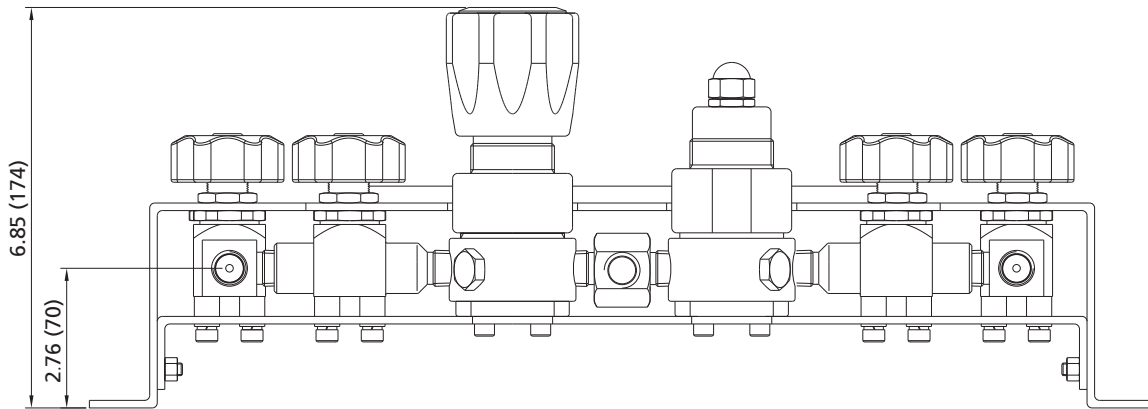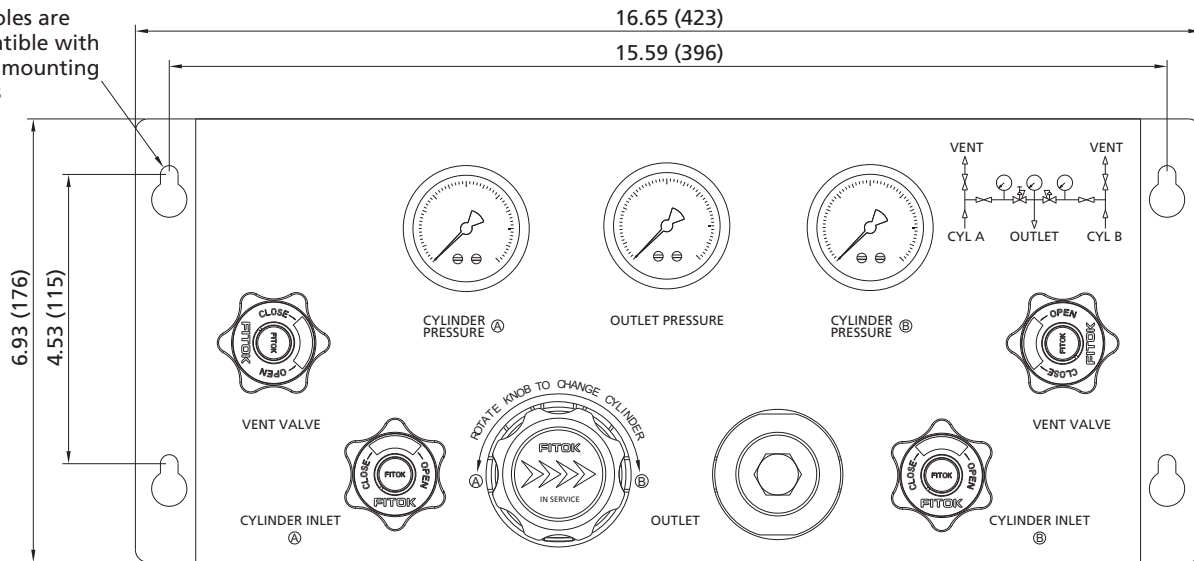

Ordering Number Description

FDR - 1L6L - 30 - 20 - B - 10 - 00 - 00

Body Material (Regulator)	
6L	316L SS
SS	316 SS
HC	Hastelloy C-276
B	Brass (Nickel-plated)

Inlet Pressure P1	
30	3000 psig
45	4500 psig

Outlet Pressure	
Outlet Pressure Range P2	Nominal Changeover Pressures
10	85~115 psig 100 psig
15	135~165 psig 150 psig
20	185~215 psig 200 psig
25	235~265 psig 250 psig

Inlet pressure must exceed changeover pressure for automatic switching to occur

Gauge Scale	
B	With Gauge (psi/bar)
M	With Gauge (psi/MPa)

Inlet A	
00	1/4" Female NPT
01	1/4" Male NPT
10	1/4" Tube Fitting
11	3/8" Tube Fitting
20	6 mm Tube Fitting
21	8 mm Tube Fitting

Inlet B	
Same as Inlet A	
Outlet	
Same as Inlet A	

Notes:

- "Ordering Number Description" is a reference to understand the combination rules of FITOK product part number. Not all combinations are available.
- Before ordering, please read **User's Guide** on A-12.

Other connections are available upon request

FITOK

Automatic Changeover Systems

DPPR Series

The DPPR series automatic changeover system, suitable for uninterrupted gas supply, uses dual gas sources of main supply cylinder and backup cylinder. When the pressure of one gas source drops below the set pressure, the changeover system will automatically switch from the depleted source to the backup source, thus achieving a continuous gas supply.

Features

- Two gas sources are connected to regulators of the automatic changeover system, when the pressure of one gas source is lower than the switching pressure, it will automatically switch to the other gas source to supply gas, thus ensuring continuous gas supply.
- Excellent sensitivity and set point pressure stability.



Technical Data

- Maximum inlet pressure: 3000 psig
- Nominal changeover pressures: 250 psig
- Outlet pressure ranges: 0 ~ 25, 0 ~ 50, 0 ~ 100, 0 ~ 150 psig
- Material of the internal components:
 - Seat: PCTFE
 - Diaphragm: Hastelloy
 - Filter: 316L SS
- Temperature: -40 °F ~ 165 °F (-40 °C ~ 74 °C)
- Valve leak rates (helium):
 - Internal: Bubble-tight
 - External: $\leq 2 \times 10^{-8}$ std cm³/s
- Flow coefficient (Cv): 0.06
- Weight: ≈ 5 lbs (2.3 kg)



Dimensions

Dimensions, in Inches (millimeters), are for reference only.

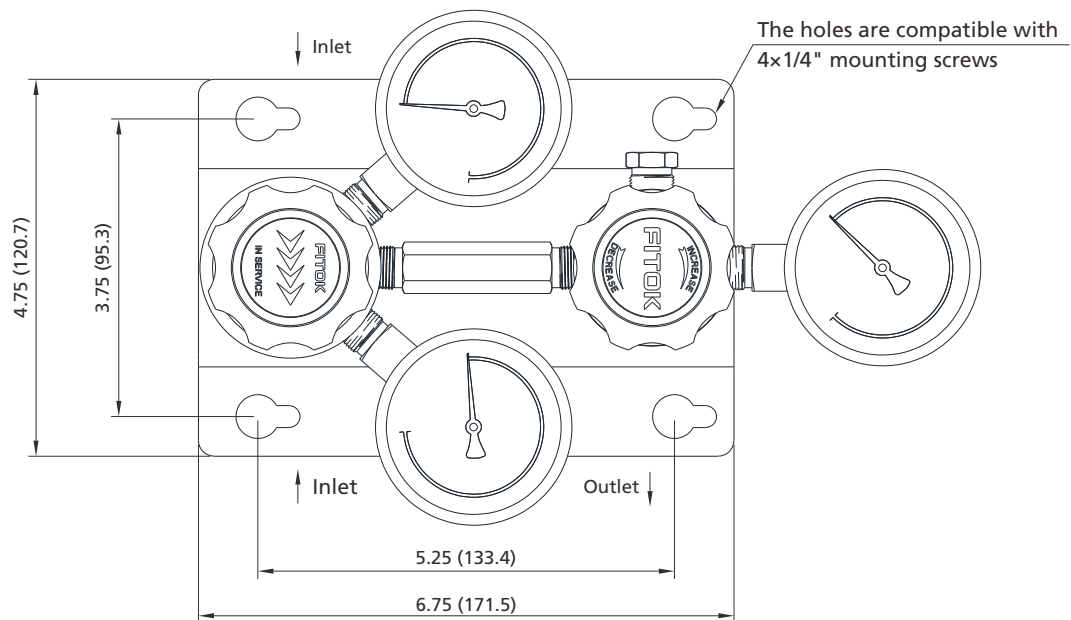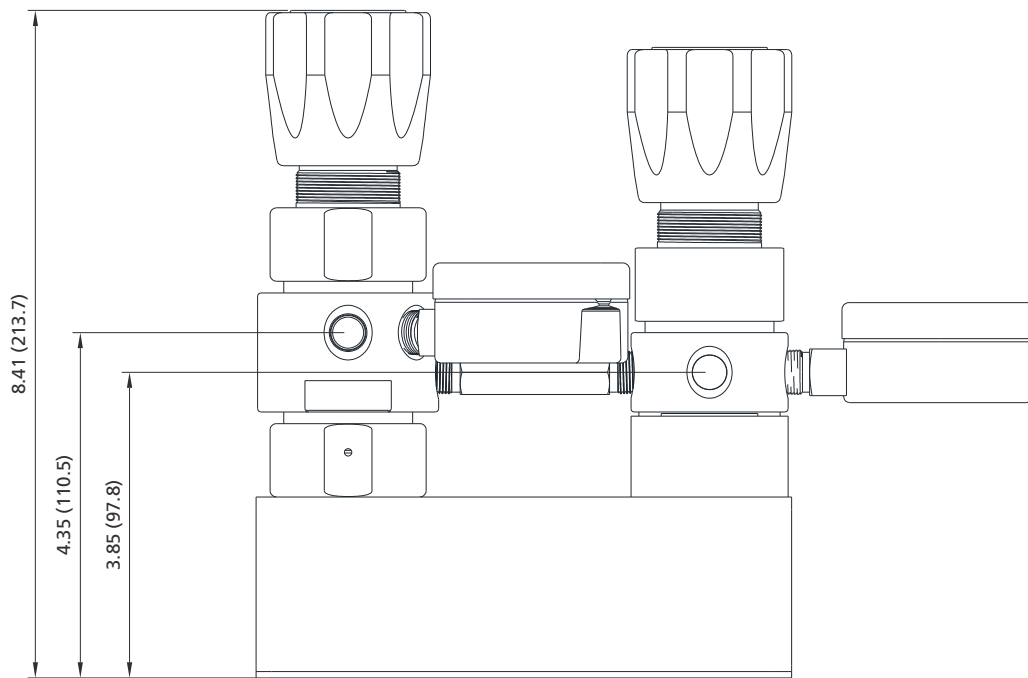


Operation Overview


The DPPR series changeover system consists of three pressure regulators, housing two single-stage regulators in a single body and a line regulator. The two single-stage regulators are each attached to separate source cylinders. The adjusting handle can swivel to enable source side selection. The other regulator is preset to an appropriate setting for the system outlet range.

The source selection handle adjusts the outlet pressure to be either above or below the preset side within 15 ~ 30 psig. When the handle is turned to point to the standby side, the standby side continues to supply gas due to the change in differential pressure to achieve continuous and uninterrupted gas supply.

When one supply drops below the changeover pressure, the selector regulator automatically switches the gas feed from the depleted supply to an alternate supply. At this time, the main gas cylinder can be changed for continuous uninterrupted gas supply.

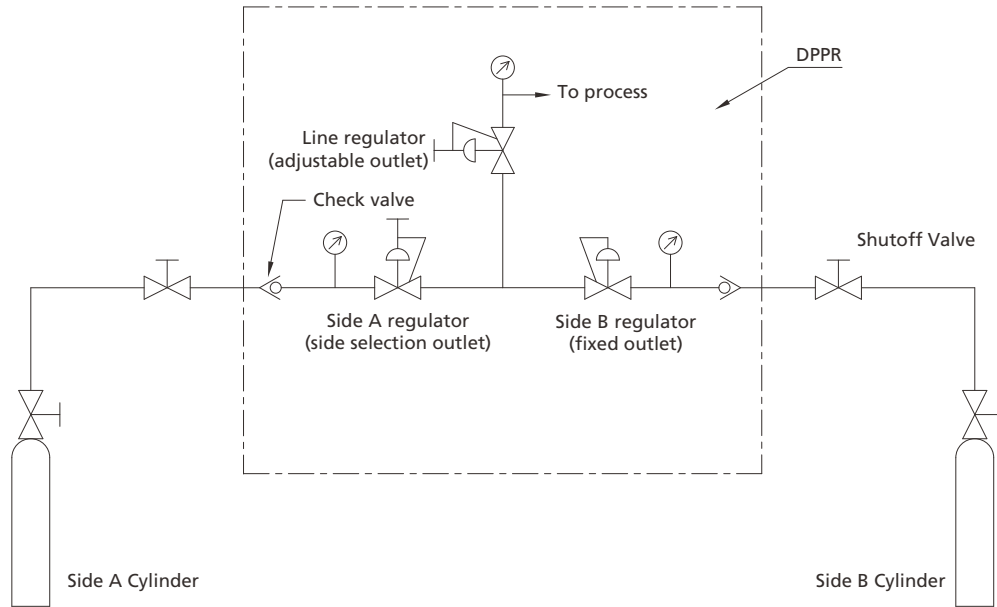

Ordering Number Description

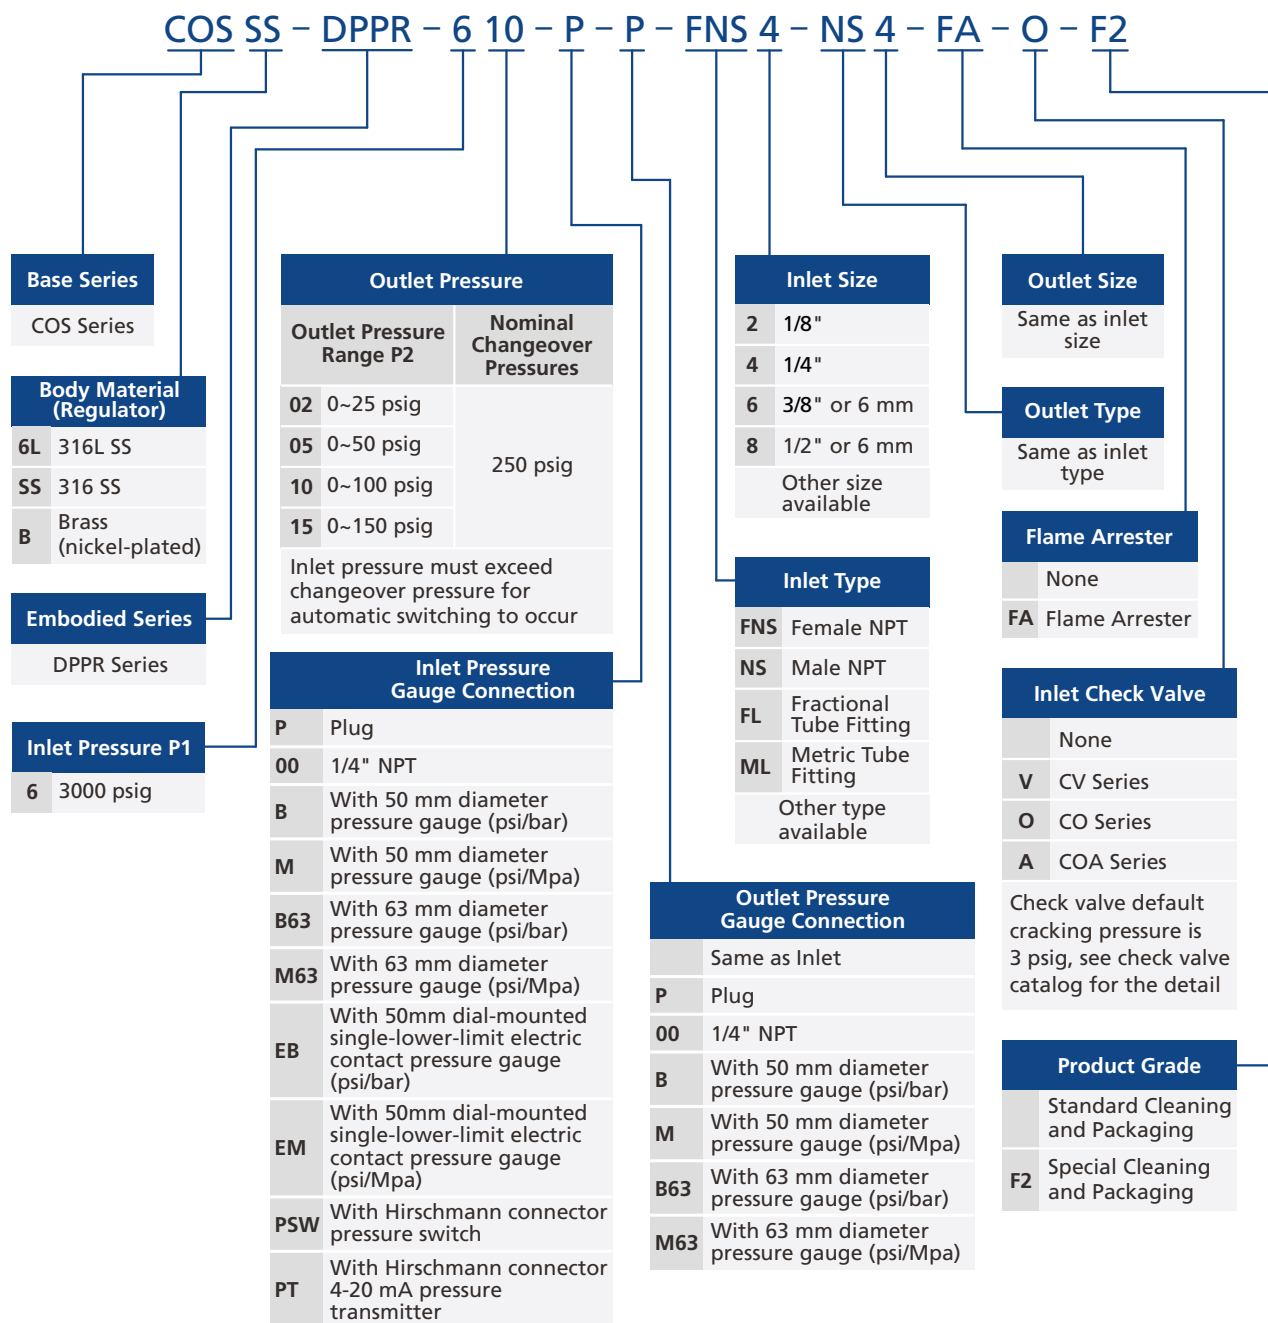

Notes:

1. "Ordering Number Description" is a reference to understand the combination rules of FITOK product part number. Not all combinations are available.
2. Before ordering, please read **User's Guide** on A-12.
3. For EB/EM/PSW/PT/FA options, please consult our engineers with specific application details (medium, pressure, flow rate, temperature) for configuration confirmation.

Automatic Changeover Systems

FDR-1T Series


Features

- Two gas sources are connected to pressure regulators of the automatic changeover system, when the pressure of one gas source is lower than the switching pressure, it will automatically switch to the other gas source to supply gas to ensure continuous gas supply
- Excellent sensitivity and set point pressure stability
- With special cleaning and packaging, applicable to oxygen-enriched atmospheres

Technical Data

- Maximum inlet pressure: 3000 or 4500 psig
- Nominal changeover pressures: 250 psig
- Outlet pressure range: 0 ~ 25, 0 ~ 50, 0 ~ 100 or 0 ~ 150 psig
- Material of the main components:
 Seat: PCTFE (regulator and diaphragm valve)
 Diaphragm: Hastelloy (regulator), cobalt alloy (diaphragm valve)
 Diaphragm valve body: 316L SS
- Temperature: -10 °F ~ 150 °F (-23 °C ~ 65 °C)
- Valve leak rates (helium):
 Internal: $\leq 1 \times 10^{-7}$ std cm³/s
 External: $\leq 1 \times 10^{-9}$ std cm³/s
- Flow coefficient (regulator Cv): 0.06
- Weight: ≈ 19.6 lbs (8.9 kg)

Flow Schematic

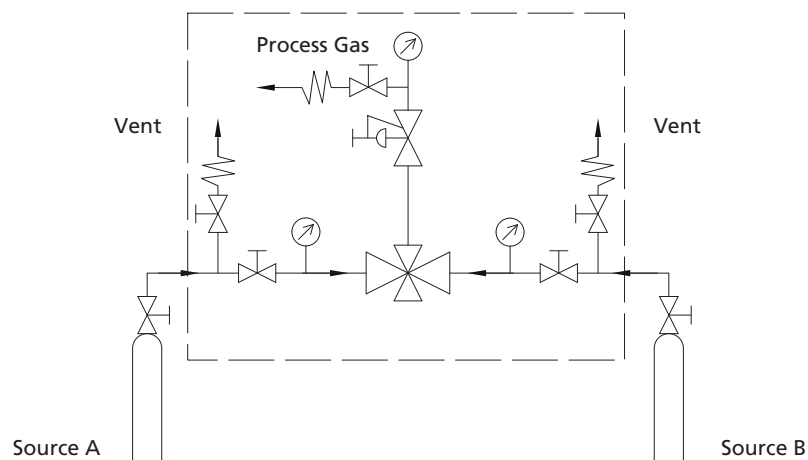

Model: FDR-1T6L-45-150-B-00-00-00

Operation Overview

The FDR-1T Series Changeover System is mainly comprised of one adjustable outlet pressure regulator and one fixed outlet pressure regulator, together with a line pressure regulator on the outlet port.

When the 2 inlets are both open, the one side that the "IN SERVICE" arrow is pointing at by turning the handle would be the 1st source for gas supply.

Fig. 1 When the "In Service" arrow is pointing at side B, side B would be the gas source. At this time, the fixed outlet pressure of side B is higher than the set pressure of side A. Consequently, the diaphragm of side A regulator moves to enable the stem to close the regulator.

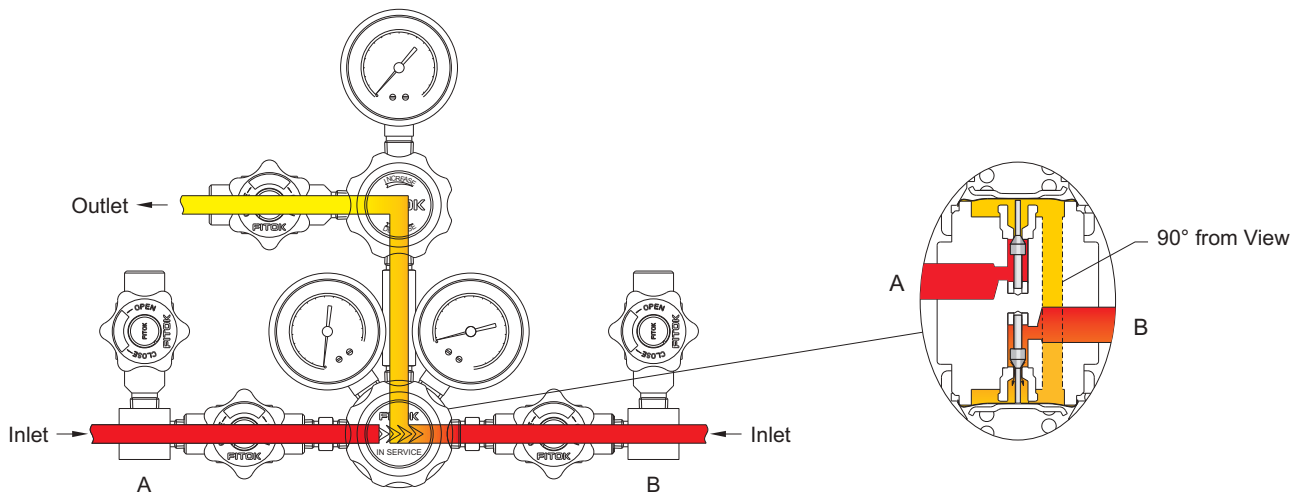


Fig. 1

Fig. 2 If side A is chosen as the gas source, the handle should be turned clockwise until the "IN SERVICE" arrow is pointing at side A. At this time, the set pressure of side A is higher than the fixed outlet pressure of side B. Consequently, the diaphragm of side B regulator moves to enable the stem to close the regulator.

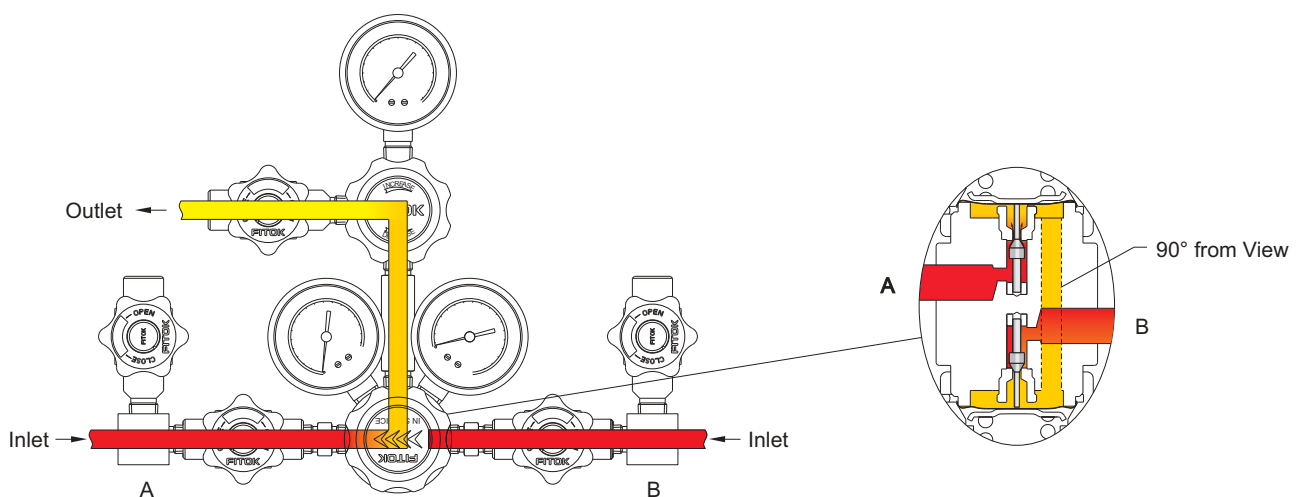


Fig. 2

When gas source of one side is depleted, gas source would automatically change to the other side.

Fig. 3 When "IN SERVICE" arrow is pointing at side B, but gas source of side B is depleted, its outlet pressure shall decrease to be lower than the set pressure of side A. By the force of spring, side A regulator will be opened to begin gas supply.

Gas from side A will flow back into side B. At this time, replace to a new gas source of side B, close the shutoff valve and open the vent valve to exhaust the remaining pressure, then replace to a new gas source. After the replacement, if not rotating the handle, the gas supply will return to the status as of Fig. 1. And if rotating the handle to the status as shown in Fig. 2, the gas supply will be changed to the status as of Fig. 2.


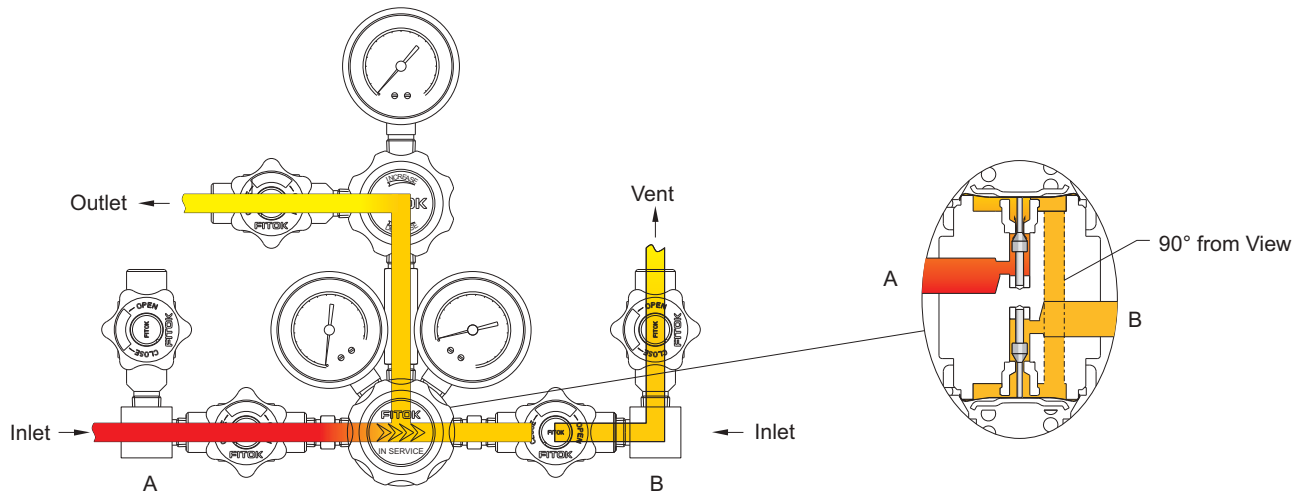


Fig. 3

Dimensions

Dimensions, in inches (millimeters), are for reference only.

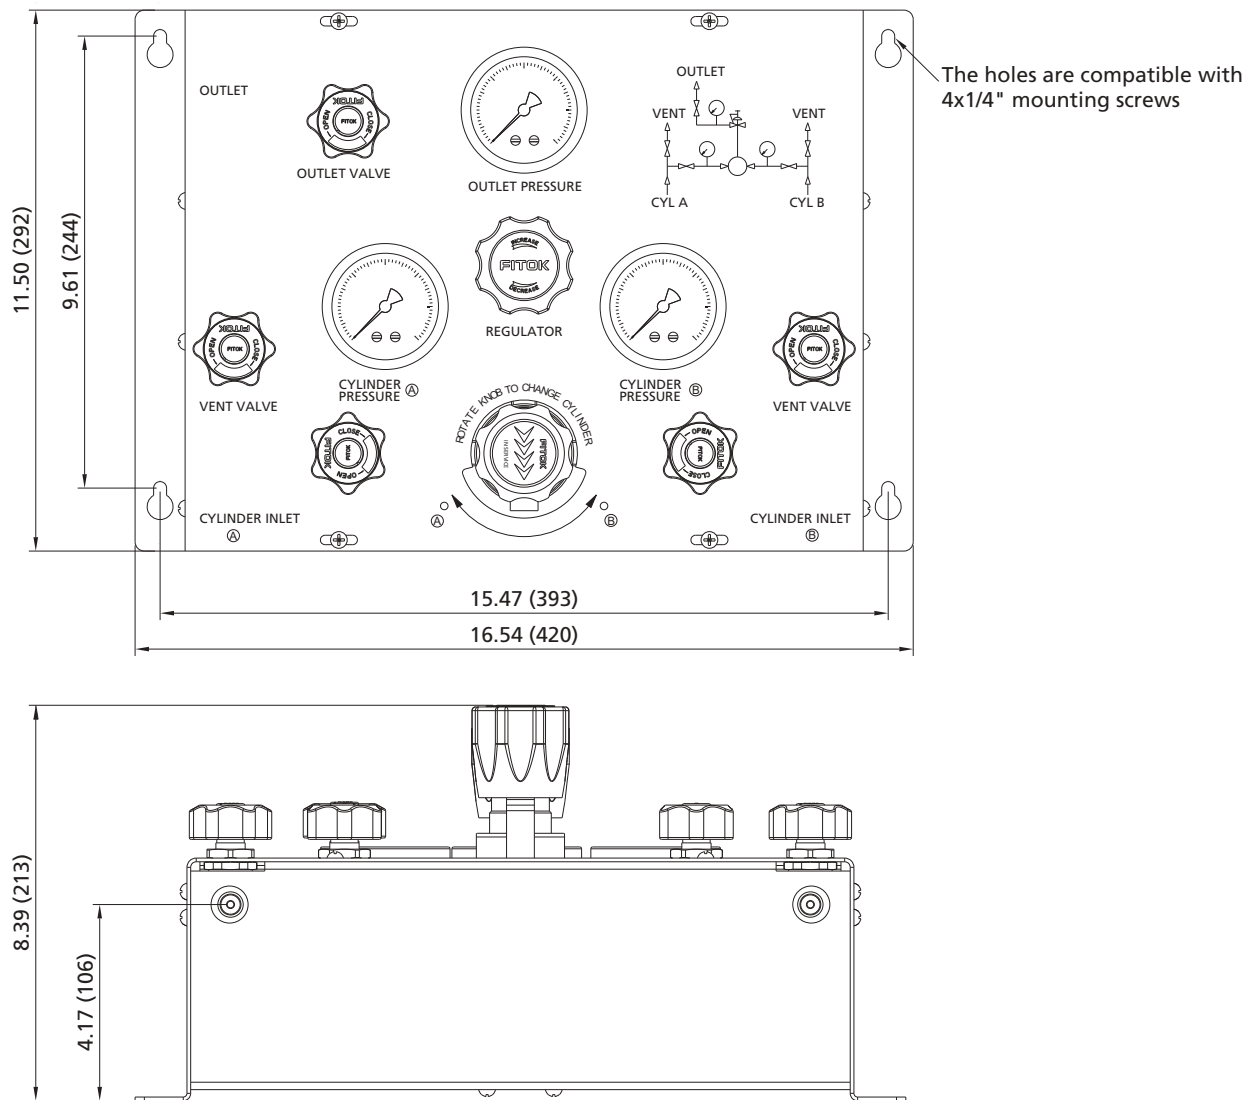

Ordering Number Description

FDR - 1T6L - 30 - 25 - B - 10 - 00 - 00

Body Material (Regulator)	
6L	316L SS
SS	316 SS
HC	Hastelloy C-276
B	Brass (Nickel-plated)

Inlet Pressure P1	
30	3000 psig
45	4500 psig

Outlet Pressure	
Outlet Pressure Range P2	Nominal Changeover Pressures
25	0~25 psig
50	0~50 psig
100	0~100 psig
150	0~150 psig
Inlet pressure must exceed changeover pressure for automatic switching to occur	

Gauge Scale	
B	With Gauge (psi/bar)
M	With Gauge (psi/MPa)

Inlet A	
00	1/4" Female NPT
01	1/4" Male NPT
10	1/4" Tube Fitting
11	3/8" Tube Fitting
Other connections are available upon request	

Inlet B
Same as Inlet A
Outlet
Same as Inlet A

Notes: 1. "Ordering Number Description" is a reference to understand the combination rules of FITOK product part number. Not all combinations are available.

2. Before ordering, please read **User's Guide** on A-12.

FITOK

Point-of-Use Panels



Contents

General Point-of-use Panels	
FPR-1 Series	A-125
<hr/>	
Sensitive Point-of-use Panels	
FPR-1S Series	A-128
<hr/>	

General Point-of-Use Panels

FPR-1 Series

Features

- With a RDGC Series Regulator
- With diaphragm valve to cut off the gas supply
- With special cleaning and packaging, applicable to oxygen-enriched atmospheres


Technical Data

- Maximum inlet pressure: 1500 psig
- Outlet pressure range: 0 ~ 25, 0 ~ 50, 0 ~ 100, 0 ~ 250 or 0 ~ 500 psig
- Material of the main components:
 - Seat: PCTFE (regulator and diaphragm valve)
 - Diaphragm: Hastelloy (regulator), cobalt alloy (diaphragm valve)
 - Diaphragm valve body: 316L SS
 - Filter: 316L SS
- Temperature: -10 °F ~ 150 °F (-23 °C ~ 65 °C)
- Valve leak rates (helium):
 - Internal: $\leq 1 \times 10^{-7}$ std cm³/s
 - External: $\leq 1 \times 10^{-9}$ std cm³/s
- Flow coefficient (regulator Cv): 0.14



Model: FPR-1U6L-15-50-11-B-11


Typical Flow Chart

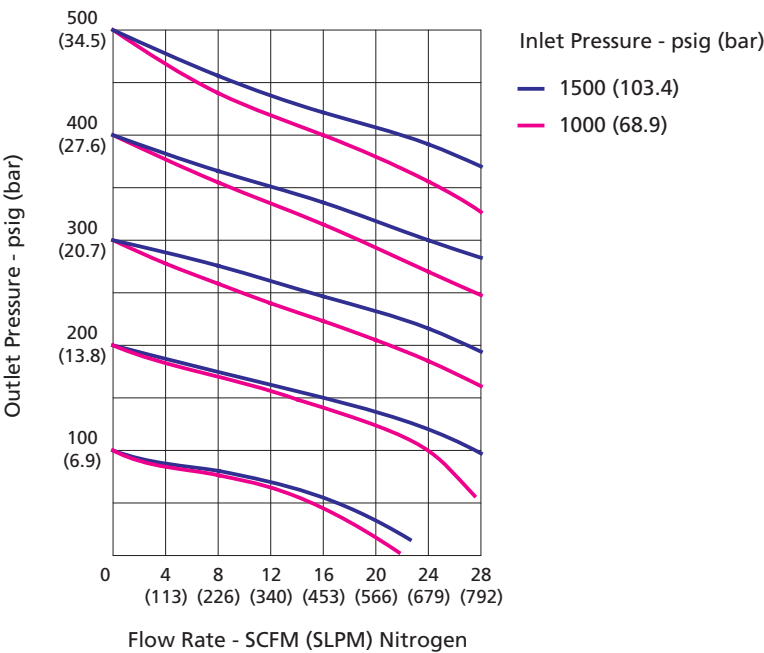


Dimensions

Dimensions, in inches (millimeters), are for reference only.


Single-outlet

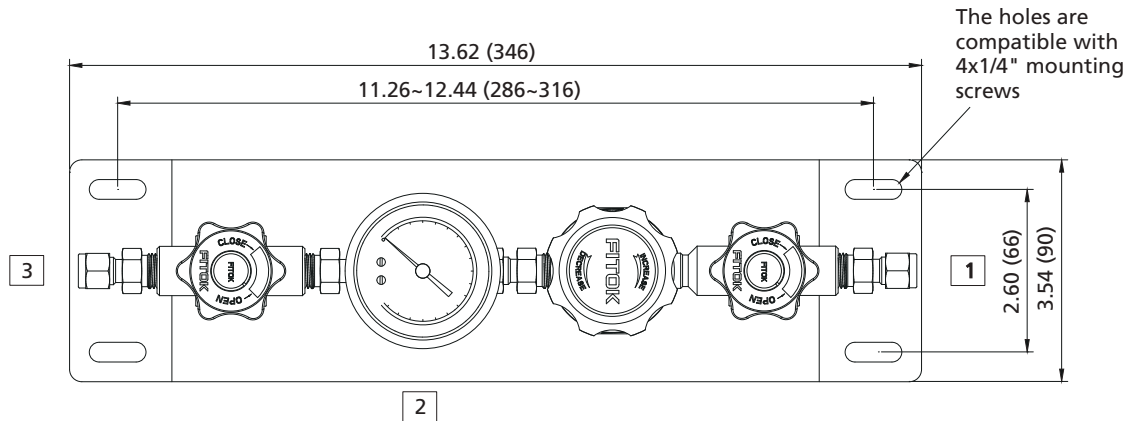


Dual-outlet

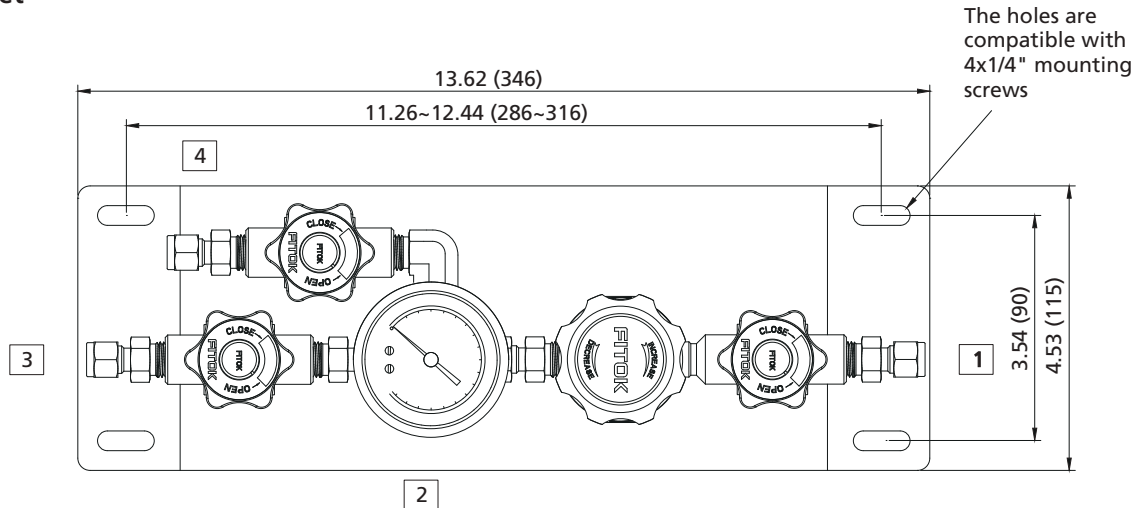

Triple-outlet

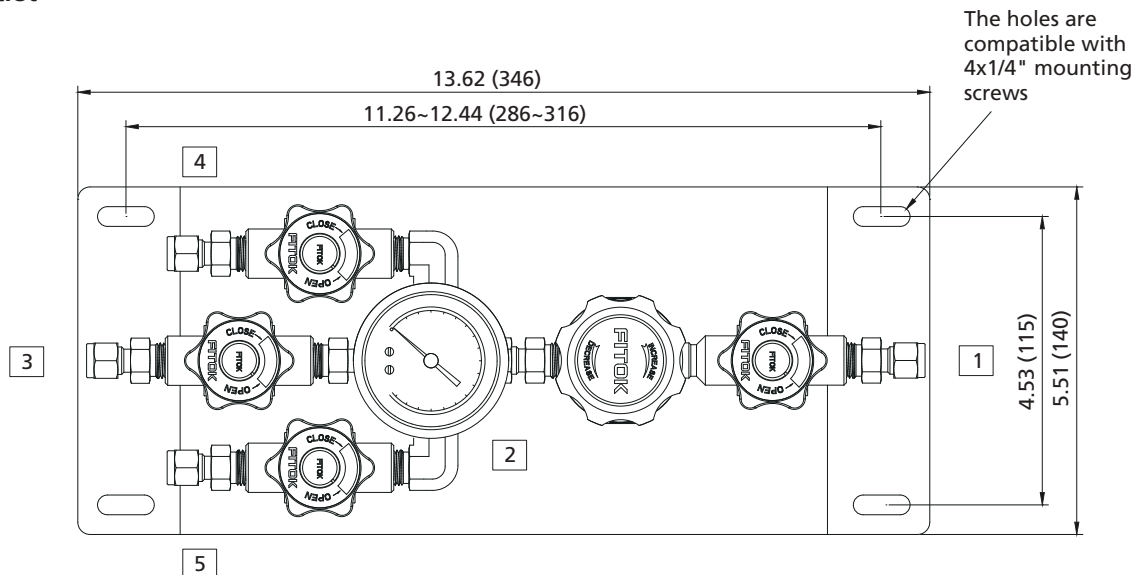

Components Introduction

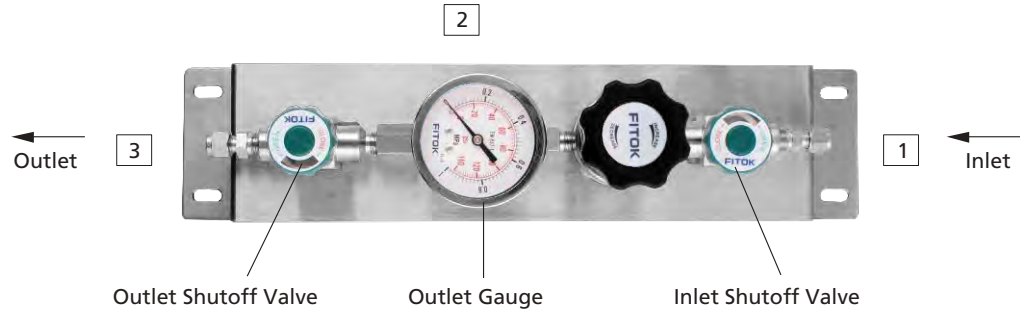

Ordering Number Description

FPR – 1C 6L – 15 – 100 – 10 – M – 10 – 00 – 00

Outlet Option		Inlet Pressure P1		Connection 1		Connection 2		Connection 3		Connection 4			
U	Single-outlet	15	1500 psig	00	1/4" Female NPT	B	With Gauge (psi/bar)	Same as Connection 1			None		
T	Dual-outlet	Outlet Pressure Range P2	25 0~25 psig	01	1/4" Male NPT	M	With Gauge (psi/MPa)	Same as Connection 1		Same as Connection 1			
C	Triple-outlet			10	1/4" Tube Fitting	P	Plug			Same as Connection 1			
Body Material (Regulator)				11	3/8" Tube Fitting	1/4" Female NPT				None			
				20	6 mm Tube Fitting								
				21	8 mm Tube Fitting								
				Other connections are available upon request									
6L	316L SS	50	0~50 psig					Same as Connection 1					
SS	316 SS	100	0~100 psig										
HC	Hastelloy C-276	250	0~250 psig										
B	Brass (Nickel-plated)	500	0~500 psig										

- Notes:
- 1. "Ordering Number Description" is a reference to understand the combination rules of FITOK product part number. Not all combinations are available.
 - 2. Before ordering, please read **User's Guide** on A-12.
- Examples of part number:
- a. 2-port type (1 in, 1 out): FPR-1U6L-15-50-11-B-11
 - b. 3-port type (1 in, 2 out): FPR-1TSS-15-100-00-B-00-00

Sensitive Point-of-Use Panels

FPR-1S Series

Features

- With a RDSC Series sensitive diaphragm regulator
- With diaphragm valve to cut off the gas supply
- With special cleaning and packaging, applicable to oxygen-enriched atmospheres


Technical Data

- Maximum inlet pressure: 1500 psig
- Outlet pressure range: 0 ~ 25, 0 ~ 50, 0 ~ 100, 0 ~ 150 or 0 ~ 200 psig
- Material of the main components:
 - Seat: PCTFE (regulator and diaphragm valve)
 - Diaphragm: Hastelloy (regulator), cobalt alloy (diaphragm valve)
 - Diaphragm valve body: 316L SS
 - Filter: 316L SS
- Temperature: -10 °F ~ 150 °F (-23 °C ~ 65 °C)
- Valve leak rates (helium):
 - Internal: $\leq 1 \times 10^{-7}$ std cm³/s
 - External: $\leq 1 \times 10^{-9}$ std cm³/s
- Flow coefficient (regulator Cv): 0.06



Model: FPR-1SUSS-15-50-10-B-10


Typical Flow Chart

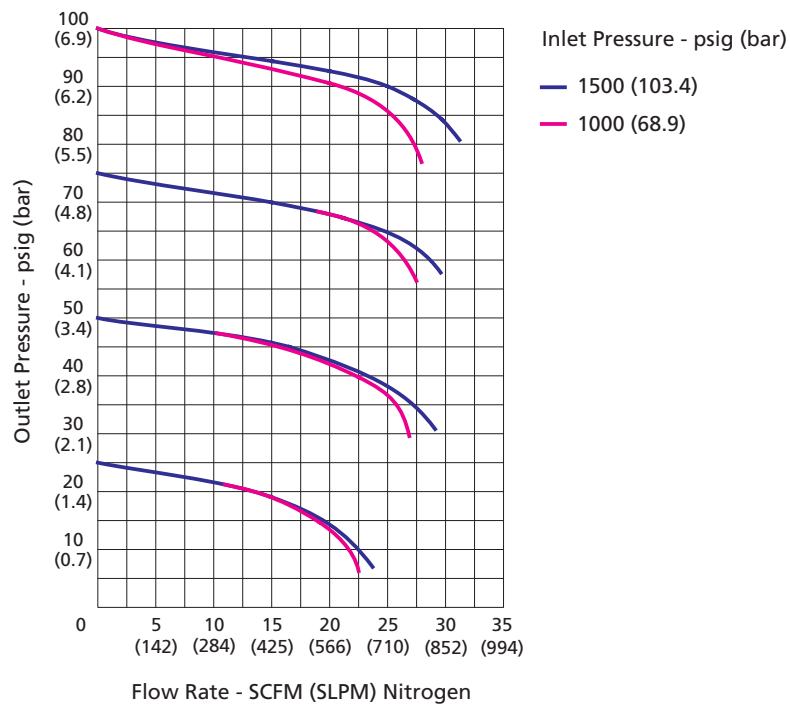


Dimensions

Dimensions, in inches (millimeters), are for reference only.


Single-outlet

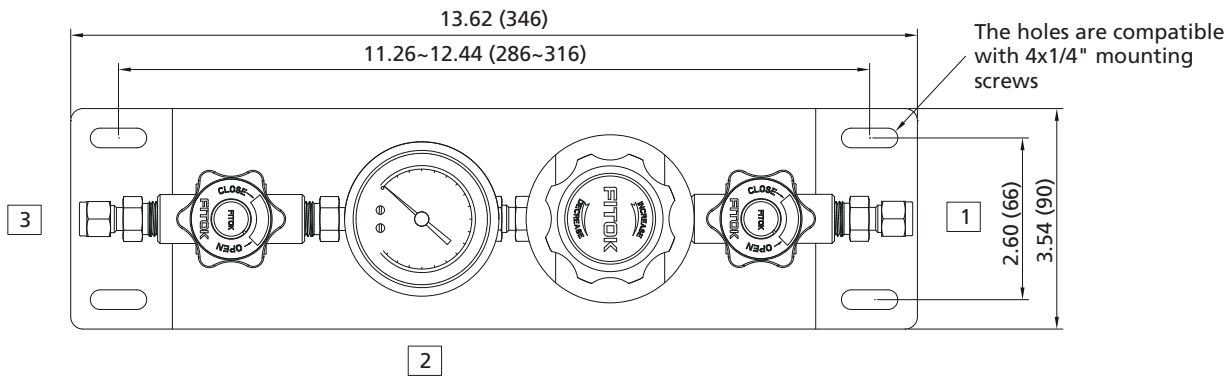


Dual-outlet

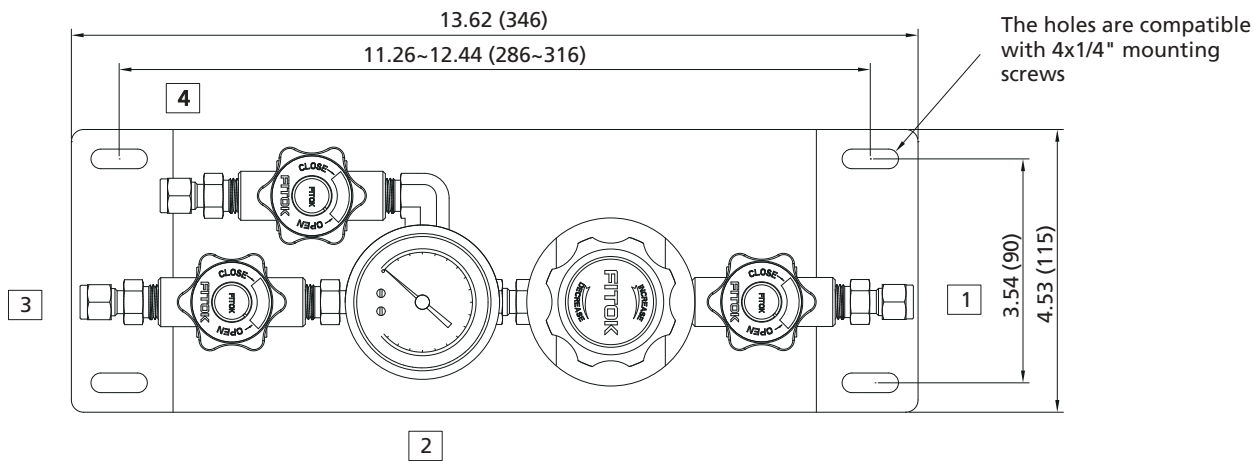

Triple-outlet

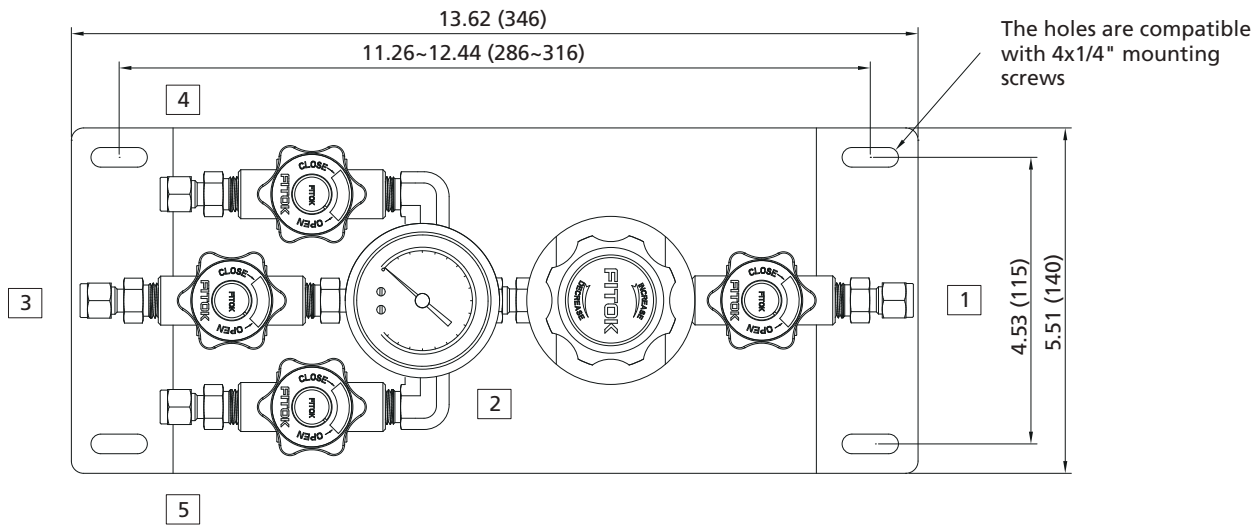

Components Introduction

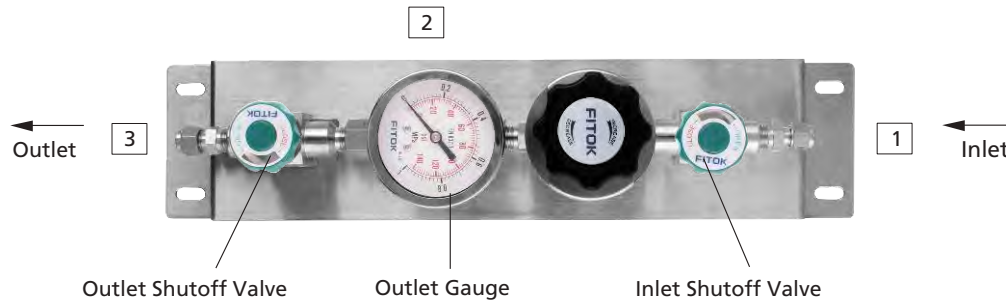

Ordering Number Description

FPR – 1SC 6L – 15 – 100 – 10 – M – 10 – 00 – 00														
Outlet Option		Inlet Pressure P1		Connection 1		Connection 2		Connection 3		Connection 4				
U	Single-outlet	15	1500 psig	00	1/4" Female NPT	B	With Gauge (psi/bar)	Same as Connection 1			None			
T	Dual-outlet	Outlet Pressure Range P2		01	1/4" Male NPT	M	With Gauge (psi/MPa)			Same as Connection 1				
C	Triple-outlet			10	1/4" Tube Fitting	P	Plug			Connection 5	None			
Body Material (Regulator)				11	3/8" Tube Fitting	00	1/4" Female NPT					Same as Connection 1		
				20	6 mm Tube Fitting									
				21	8 mm Tube Fitting									
				Other connections are available upon request										
6L	316L SS	25	0~25 psig											
SS	316 SS	50	0~50 psig											
B	Brass	100	0~100 psig											
		150	0~150 psig											
		200	0~200 psig											

Notes:

- "Ordering Number Description" is a reference to understand the combination rules of FITOK product part number.
Not all combinations are available.
- Before ordering, please read **User's Guide** on A-12.
Examples of part number:
 - 2-port type (1 in, 1 out): FPR-1SU6L-15-25-00-B-20
 - 3-port type (1 in, 2 out): FPR-1STB-15-200-10-M-10-10

B

Related Products



Contents

Purge Assemblies	
FPV-1 Series	B-03
High Pressure Compact Diaphragm Valves	
DS Series	B-05
One-Piece Instrumentation Ball Valves	
BO Series	B-06
Nonrotating-Stem Needle Valves	
ND and NDH Series	B-08
Check Valves	
CV, CO and COA Series	B-10
Relief Valves	
RUV and RV Series	B-13
Tee-Type Filters	
FT Series	B-15
bypass Filters	
FB Series	B-17
In-Line Filters	
FI Series	B-19
All-Welded In-Line Filters	
FW Series	B-21
High-Capacity Filters	
FH Series	B-22
Tube Fittings	
6D Series	B-24
Metal Flexible Hoses	
MH and MM Series	B-27
Cylinder Connections	
CGA DISS Series	B-31
CGA Series	B-35
DIN Series	B-42
Gas Connection Assignment Table	B-43

Purge Assemblies

FPV-1 Series

Technical Data

- ⊙ Maximum working pressure: 4500 psig
- ⊙ Material of the main components:
 Seat: PCTFE (diaphragm valve)
 Diaphragm: cobalt alloy (diaphragm valve)
- ⊙ Temperature: -10 °F ~ 150 °F (-23 °C ~ 65 °C)
- ⊙ Leak rates (helium):
 Internal: $\leq 1 \times 10^{-9}$ std cm³/s
 External: $\leq 1 \times 10^{-9}$ std cm³/s
- ⊙ Minimum orifice: $\Phi 0.13$ " (3.2 mm)

Product Types

⊙ Straight Purge Assemblies

Consisting of a diaphragm valve and a check valve (see Fig. 1-1).

Connecting the auxiliary inlet port (see Fig. 1-2) of the regulator or in between the regulator and the cylinder (see Fig. 1-3) to allow the corrosive or toxic gas to be vented through to a safe location.




Fig. 1-1

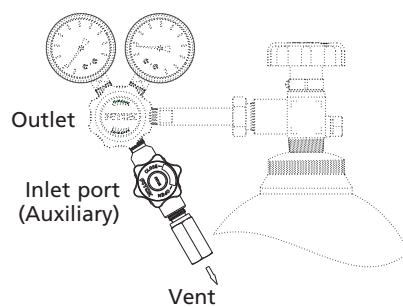


Fig. 1-2

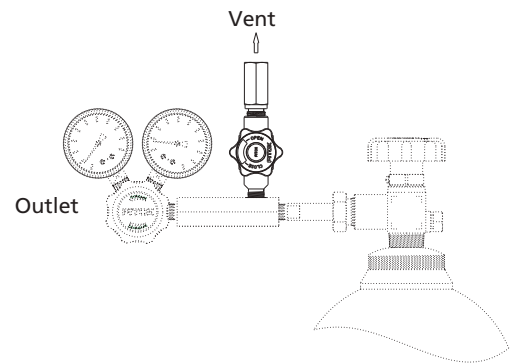


Fig. 1-3

⊙ Tee Purge Assemblies

Consisting of a diaphragm valve, check valve, tee, and cylinder connections (see Fig. 2-1).

Connecting the cylinder with the regulator. Before installing a new cylinder, open the diaphragm valve, and the remaining gas is vented safely; or after a new cylinder is installed, close the regulator and open the diaphragm valve, enabling the process gas inside the cylinder to purge the atmospheric contamination between the cylinder and the regulator (see Fig. 2-2).



Fig. 2-1

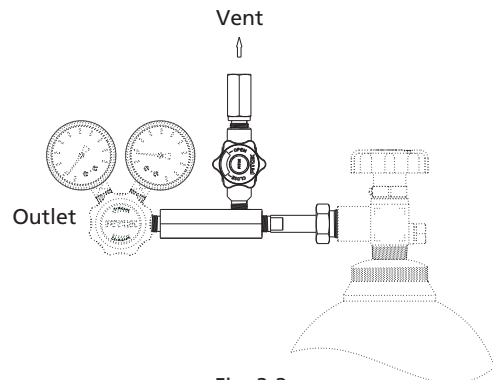


Fig. 2-2

☉ Cross Purge Assemblies

Consisting of a tee purge assembly and two additional diaphragm valves (see Fig. 3-1).

Except for process gas, purging is also made possible with inert gas from outside (see Fig. 3-2). The steps are as follows: Before installing a new cylinder, close the diaphragm valve beside the regulator, and open the shutoff diaphragm valve on the vent line to release the residual pressure.

After installing a new cylinder, open the diaphragm valve on the bottom, allowing the inert gas from outside to purge the atmospheric contaminations between the cylinder and the diaphragm valve.

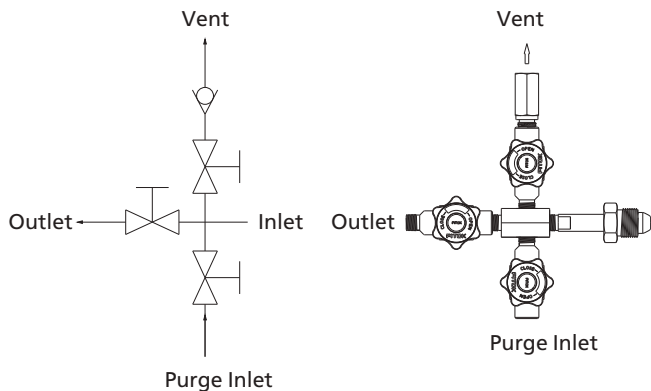


Fig. 3-1

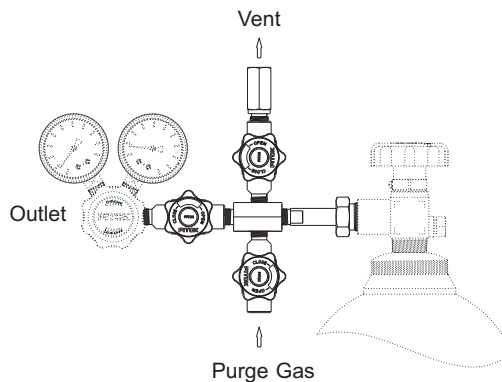


Fig. 3-2

Part Number Description

FPV – 1C 6L – DIN1 – 00 – 00 – 00

Product Type		Body Material		Inlet Port		Vent Port		Outlet Port	Purge Inlet
S	Straight Purge Assemblies	6L	316L SS	00	1/4" Female NPT	00	1/4" Female NPT	Same as Vent Port	Same as Vent Port
T	Tee Purge Assemblies	SS	316 SS	01	1/4" Male NPT	01	1/4" Male NPT		
C	Cross Purge Assemblies			C_	CGA Number (USA)	10	1/4" Tube Fitting		
				DIN_	DIN Number (Germany)	20	6 mm Tube Fitting		
					Refer to page B-30 for cylinder connections based on specific gas type. Cylinder connections compliant to other standards are available upon request. Please contact FITOK Group for details.	21	8 mm Tube Fitting		
							Other connections are available upon request		

High Pressure Compact Diaphragm Valves

DS Series

Features

- Reduced inner volume
- Packless diaphragm seal to ensure high purity
- Minimized number of components
- Manual and pneumatic actuators available
- Aluminum piston to increase operation speed

Technical Data

Port Size		1/4" to 3/8" or 6 mm to 8 mm
Flow Coefficient (Cv)		0.17
Orifice Size		0.12 in. (3.0 mm)
Max. Working Pressure	Manual	4500 psig (310 bar)
	Pneumatic	3000 psig (206 bar)
Pneumatic Actuator Operating Pressure		60 to 90 psig (4.2 to 6.2 bar)
Temperature		PCTFE: -10 ~ 150 °F (-23 ~ 65 °C) Polyimide: -10 ~ 250 °F (-23 ~ 121 °C)
Leak Rate (Helium)	Internal	$\leq 1 \times 10^{-9}$ std cm ³ /s
	External	$\leq 1 \times 10^{-9}$ std cm ³ /s

Flow Data

Air @ 70 °F (21 °C)
Water @ 60 °F (16 °C)

Pressure Drop to Atmosphere psig (bar)	Air (l/min)	Water (l/min)
10 (0.68)	55	1.9
50 (3.4)	150	4.5
100 (6.8)	260	6.4



Ordering Number Description

DS6L - NS4 - FNS4 - RVF2 - CE

Body Material		Inlet Type		Outlet Type	Outlet Size	Actuator Type		Process Specification		Seat	Product Certification	
6L	316L SS	TB	Fractional Tube Butt Weld	Same as Inlet	Specified in the same way as Inlet	R	Manual-Round Handle	FC-01	F2	PCTFE	None	CE
6LV	316L SS VAR	MTB	Metric Tube Butt Weld									
		FR	Integral Male FR Metal Gasket Face Seal Fitting	Same as Inlet	Specified in the same way as Inlet	C	Normally Closed Pneumatic	FC-02	F3	Polyimide	CE Certification (For pneumatic only)	
		FFR	Rotatable Female FR Metal Gasket Face Seal Fitting									
		FL	Fractional Tube Fitting	Same as Inlet	Specified in the same way as Inlet	O	Normally Open Pneumatic	FC-03				
		ML	Metric Tube Fitting									
		NS	Male NPT	Same as Inlet	Specified in the same way as Inlet							
		FNS	Female NPT									

Notes:

- "Ordering Number Description" is a reference to understand the combination rules of FITOK product part number. Not all combinations are available.
- For -CE selections, products have "CE" lettering.

One-Piece Instrumentation Ball Valves

BO Series

Features

- ⦿ Working pressure up to: 3000 psig (207 bar)
- ⦿ Working temperature: -65°F to 300°F (-54°C to 148°C)
- ⦿ End connections:
 - 1/4 to 1/2 thread
 - 1/16" to 3/4" and 3 mm to 18 mm tube fitting
- ⦿ 2-, 3-, 4-, 5-, 6- and 7-way models for on-off, switching and crossover service available
- ⦿ One-piece body and one-piece ball stem
- ⦿ No dead space
- ⦿ Top-loaded design to allow adjustment with the valve in-line
- ⦿ Thermal cycle performance improved and wear compensated by live-loaded design
- ⦿ Any reasonable connections available
- ⦿ Pneumatic and electric actuator available
- ⦿ Handle color options available
- ⦿ Full operating pressure at any port
- ⦿ Leak-tight performance testing with nitrogen or compressed air for every valve at the rated pressure to meet the requirement of no visible leak
- ⦿ The inlet can be any port except for valves with vent ports



Notes:

1. To prevent seat leakage, packing adjustment may be required periodically during the service life of the valve.
2. A higher initial actuation torque may happen to the valves that have not been actuated for a period of time.
3. Before installation, instrumentation ball valves exposed to dynamic temperature conditions may lose their initial packing load. Stem packing adjustment should be required.

Ordering Number Description

BOSS - ML6 - FL4 - ML8 - H05 - DXHQ3L - BLH - FL4 - SF2

Series	Body Material	Connection 1 Type	Connection 1 Size	Connection 2 to 7 Type	Connection 2 to 7 Size	Seat Material	Orifice Size	Handle/Actuator	For Actuator	Flow Pattern	Panel Installation	Locking Device	Vent Port	Special Application	Cleaning and Packaging
BO	SS 316 SS	FNS Female NPT	1 1/16"	Same as connection 1	Specified in the same way as the connection 1 type and size	00 (1.3 mm)	Black Nylon Handle	NO	Mechanical Limit Switch	A	Straight	No vent port	No vent port	NO	
	S4 304 SS	NS Male NPT	2 1/8"			01 (1.6 mm)									
	S1 321 SS	FRT Female BSPT	3 3 mm	PTFE	H UHMWPE	02 (2.4 mm)	Green Nylon Handle	N Inductive	N Inductive	3HL	3-way	FL2 1/8" tube fitting	1/8" tube fitting	S NACE MR0175	
	6L 316L SS	RT Male BSPT	4 1/4"			03 (3.2 mm)	Blue Nylon Handle	Q Solenoid Valve	Q Solenoid Valve	4L		FL4 1/4" tube fitting	1/4" tube fitting	SI SilcoNert® 2000 (Sulfinert®) Coating	
	B Brass	FMS Female Metric Thread (for RG-M)	6 3/8" or 6 mm	A PFA		05 (4.8 mm)	Black Aluminium Handle	HQ and Solenoid Valve	HQ and Solenoid Valve	4C	4-way	ML3 3 mm tube fitting	3 mm tube fitting	CE Certification	
	M Alloy 400	MS Male Metric Thread (for RG-M)	8 1/2" or 8 mm			07 (7.1 mm)	90° Normally Closed Pneumatic Actuator	NQ and Solenoid Valve	NQ and Solenoid Valve	4H		ML6 6 mm tube fitting	6 mm tube fitting		
		FRP Female BSPP (for RP)	10 10 mm			10 (10.3 mm)	90° Double Acting Pneumatic Actuator			4V		ML8 8 mm tube fitting	8 mm tube fitting		FC-01
		FL Fractional Tube Fitting	12 3/4" or 12 mm							5L				F2	FC-02
		ML Metric Tube Fitting	14 14 mm							5H	5-way			FOG without Lubrication	
		FO Male FO Fitting	16 16 mm							5HL					
		FR Male FR Fitting	18 18 mm							5LV					
										6L	6-way				
										6C					
										7L	7-way				

Note: "Ordering Number Description" is a reference to understand the combination rules of FITOK product part number. Not all combinations are available.

1. For oxygen-enriched atmosphere or hazardous media service, contact FITOK Group or our authorized distributors.

2. Cleaning and Packaging:

FC-01: Standard cleaning and packaging for general industrial procedures.

FC-02: Special cleaning and packaging for wetted system components to ensure compliance with product cleanliness requirement of ASTM G93 Level C.

3. For more information about pneumatic actuator ball valves, please refer to the catalog **Automatic Control Ball Valves**.

4. SilcoNert® 2000 (Sulfinert®) Coating: Wetted metal components SilcoNert® 2000 (Sulfinert®) coated.

5. CE certification is available. For more information, please contact FITOK group or our authorized distributors.

Nonrotating-Stem Needle Valves

ND Series: Working pressure up to 3000 psig

NDH Series: Working pressure up to 5000 psig


Features

- ⦿ One-piece forged body
- ⦿ Straight and angle pattern
- ⦿ Compact design
- ⦿ Non-rotating stem
- ⦿ Specially designed handle to stop contamination from entering into the valve
- ⦿ Every valve leak tested with nitrogen or compressed air at the maximum allowable working pressure
- ⦿ Working pressure up to:
 - ND Series—Stainless steel: 3000 psig (207 bar)
 - Brass: 3000 psig (207 bar)
 - NDH Series—Stainless steel: 5000 psig (345 bar)
- ⦿ Working temperature with stem tip:
 - PCTFE stem tip: -20°F to 200°F (-28°C to 93°C)
 - PEEK stem tip: -20°F to 400°F (-28°C to 204°C)
- ⦿ Working temperature with O-ring:
 - Fluorocarbon Rubber (FKM) : -20°F to 400°F (-28°C to 204°C)
 - Nitrile Butadiene Rubber (NBR) : -20°F to 212°F (-28°C to 100°C)
 - Ethylene Propylene Diene Rubber (EPDM): -20°F to 300°F (-28°C to 148°C)




Pressure vs. Temperature

ND Series

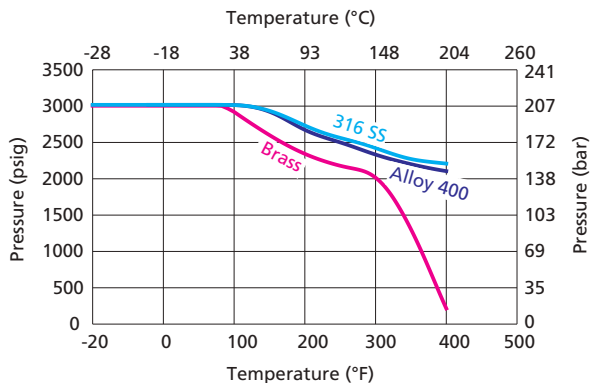


NDH Series

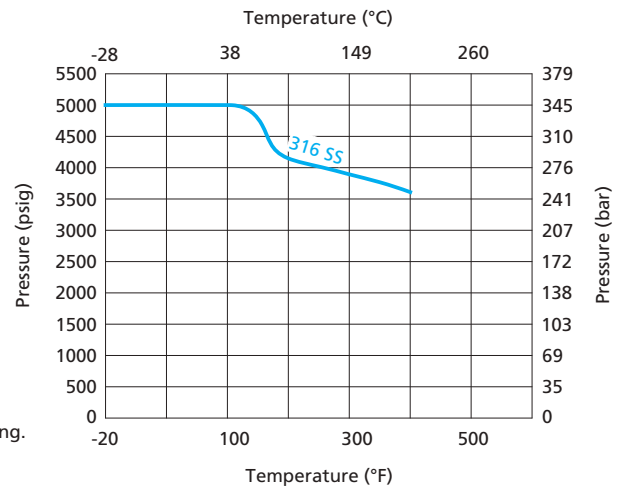

1. The graphs are based on PEEK stem tip and Fluorocarbon rubber (FKM) O-ring.
2. Contact FITOK Group or our authorized distributors for curve graph of other materials.

Flow Data at 100 °F (38 °C)

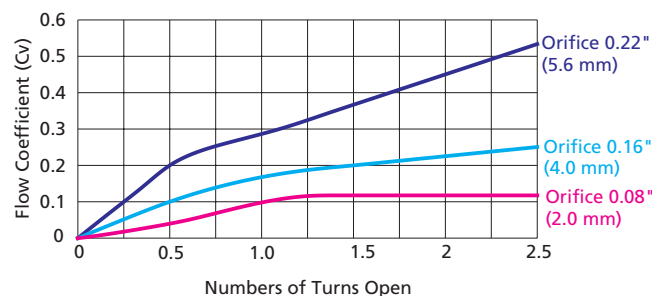

Ordering Number Description

NDSS - FNS4 - ML8 - 7PE - ASF2

Series	Body Material	Inlet Type	Inlet Size	Outlet Type	Outlet Size	Orifice Size	Stem Tip Material	O-ring Material	Flow Pattern	Special Application	Cleaning and Packaging
ND	SS 316 SS	FNS Female NPT	2 1/8"	Same as Inlet	Specify in the same way as inlet type and inlet size	5 0.08" (2.0 mm)	PCTFE	Fluorocarbon Rubber (FKM)	Straight	NO	FC-01
	NDH	NS Male NPT	4 1/4"			7 0.16" (4.0 mm)	P PEEK	Nitrile Butadiene Rubber (NBR)	A Angle	S NACE MR0175	F2 FC-02
S4 304 SS	FRT Female BSPT	6 3/8" or 6 mm	8 0.22" (5.6 mm) Only for ND Series				Ethylene Propylene Diene Rubber (EPDM)		SI SilcoNert® 2000 (Sulfinert®) Coating		
4L 304L SS	RT Male BSPT	8 1/2" or 8 mm									
S1 321 SS	FL Fractional Tube Fitting	10 10 mm									
M Alloy 400	ML Metric Tube Fitting	12 12 mm									
B Brass											

Note: "Ordering Number Description" is a reference to understand the combination rules of FITOK product part number. Not all combinations are available.

1. Cleaning and Packaging:
FC-01: Standard cleaning and packaging for general industrial procedures.
FC-02: Special cleaning and packaging for wetted system components to ensure compliance with product cleanliness requirement of ASTM G93 Level C.
2. Special Application:
Plural special application designators available in one ordering number, example: NDSS-NS4-7-SSI.
SilcoNert® 2000 (Sulfinert®) coating: Wetted metal components SilcoNert® 2000 (Sulfinert®) coated.

Check Valves


CV, CO and COA Series



Features


CV Series

- ⦿ Resilient O-ring seat design for leak free sealing
- ⦿ Working pressure up to: 3000 psig (207 bar)
- ⦿ Working temperature: -10°F to 375°F (-23°C to 190°C)
- ⦿ Cracking pressure: 1/3 to 25 psig (0.02 to 1.7 bar)
- ⦿ Variety of end connections and materials available
- ⦿ Non-adjustable cracking pressure, mountable in any directions

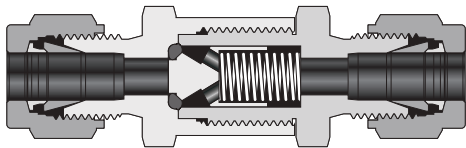


CO Series

- ⦿ Compact design, one-piece body
- ⦿ Working pressure up to: 3000 psig (207 bar)
- ⦿ Working temperature: -10°F to 375°F (-23°C to 190°C)
- ⦿ Cracking pressure: 1/3 to 25 psig (0.02 to 1.7 bar)
- ⦿ Variety of end connections and materials available
- ⦿ Non-adjustable cracking pressure, mountable in any directions



COA Series

- ⦿ Compact design, one-piece body
- ⦿ Working pressure up to: 3000 psig (207 bar)
- ⦿ Working temperature: -10°F to 375°F (-23°C to 190°C)
- ⦿ Cracking pressure: 3 to 600 psig (0.21 to 41.4 bar)
- ⦿ Variety of end connections and materials available
- ⦿ Various springs available
- ⦿ Adjustable cracking pressure, mountable in any directions

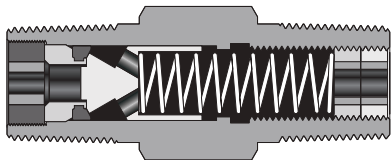

Notes:

1. Check valves are all coated with lubricants like silicone base and molybdenum disulfide base.
2. Please contact FITOK Group or our authorized distributors for other materials.
3. PTFE-coated spring is an option for CV, CO and COA series check valves. For more details, please contact FITOK Group or our authorized distributors.
4. Every valve is tested with nitrogen for leak-tight performance at its maximum working pressure.

Ordering Number Description

CVSS – FL8 – ML10 – B – 2SF2

Series	Body Material	Inlet Type	Inlet Size	Outlet Type	Outlet Size	Seal Material	Normal Cracking Pressure	Special Application	Cleaning and Packaging
CV	SS 316 SS	FNS Female NPT	2 1/8"			Fluorocarbon FKM	3 psig	NO	FC-01
	6L 316L SS	NS Male NPT	4 1/4"			B Buna N	1 1/3 psig	S NACE MR0175	F2 FC-02
	B Brass	FRT Female BSPT	6 3/8" or 6 mm			E EPDM	2 1 psig		
	M Alloy 400	RT Male BSPT	8 1/2" or 8 mm			N Neoprene	3 10 psig		
		FMS Female Metric Thread (for RG-M)	10 10 mm			Z FFKM	4 25 psig		
		MS Male Metric Thread (for RG-M)	12 3/4" or 12 mm						
		FRP Female BSPP (for RP)	16 1"			Same as Inlet			
		BP Male BSPP (for RG)				Specified in the same way as the inlet type and size			
		FL Fractional Tube Fitting							
		ML Metric Tube Fitting							
		FO Male FO Fitting							
		FR Male FR Fitting							
		UMB Rotatable Metric Tube Butt Weld							
		UFB Rotatable Fractional Tube Butt Weld							

1. Standard thread pitch for metric threads are as follows:
M10 and below: 1 mm
M12 to M24: 1.5 mm
M27 and above: 2 mm
Standard thread pitch should be omitted in the ordering number, others should be specified.
2. For oxygen-enriched atmosphere or hazardous media service, please contact FITOK Group or our authorized distributors.
3. Cleaning and Packaging:
FC-01: Standard cleaning and packaging for general industrial procedures.
FC-02: Special cleaning and packaging for wetted system components to ensure compliance with product cleanliness requirement of ASTM G93 Level C.
4. The materials, connection types and sizes listed in the "Ordering Number Description" are standard. For other materials and end connections, please contact FITOK Group or our authorized distributors.
5. PTFE-coated gasket can be chosen to reduce the possibility of O-ring's moving in system caused by the pressure fluctuations, vibration or pulsating. For more details, please contact FITOK Group or our authorized distributors.
6. Check valve is designed with unidirectional flow path, it can't be used as safety relief valve.
7. If the check valve is not opened for a period of time, its initial cracking pressure may be higher than set cracking pressure.

Ordering Number Description

COSS – FNS8 – NS8 – B – 2SF2

Series	Body Material	Inlet Type	Inlet Size	Outlet Type	Outlet Size	Seal Material	Normal Cracking Pressure	Special Application	Cleaning and Packaging
CO	SS 316 SS	FNS Female NPT	2 1/8"	Same as Inlet Specified in the same way as the inlet type and size		Fluorocarbon FKM	3 psig	NO	FC-01
	6L 316L SS	NS Male NPT	4 1/4"			B Buna N	1 1/3 psig	S NACE MR0175	F2 FC-02
	B Brass	FRT Female BSPT	6 3/8"			E EPDM	2 1 psig		
	M Alloy 400	RT Male BSPT	8 1/2"			N Neoprene	3 10 psig		
						Z FFKM	4 25 psig		

- For oxygen-enriched atmosphere or hazardous media service, please contact FITOK Group or our authorized distributors.
- Cleaning and Packaging:
FC-01: Standard cleaning and packaging for general industrial procedures.
FC-02: Special cleaning and packaging for wetted system components to ensure compliance with product cleanliness requirement of ASTM G93 Level C.
- The materials, connection types and sizes listed in the "Ordering Number Description" are standard. For other materials and end connections, please contact FITOK Group or our authorized distributors.
- Check valve is designed with unidirectional flow path, it can't be used as safety relief valve.
- If the check valve is not opened for a period of time, its initial cracking pressure may be higher than set cracking pressure.

Ordering Number Description

COASS – FNS8 – FNS4 – B – 5SF2 – T

Series	Body Material	Inlet Type	Inlet Size	Outlet Type	Outlet Size	Seal Material	Cracking Pressure	Special Application	Cleaning and Packaging	Specified Cracking Pressure
COA	SS 316 SS	FNS Female NPT	4 1/4"	Same as Inlet Specified in the same way as the inlet type and size		Fluorocarbon FKM	3 to 50 psig	NO	FC-01	None
	6L 316L SS	NS Male NPT	8 1/2"				5 50 to 150 psig	S NACE MR0175	F2 FC-02	T Valves are set and tested as per the specified cracking pressure
	B Brass	RT Male BSPT					6 150 to 350 psig			
	M Alloy 400						7 350 to 600 psig			
						B Buna N				
						E EPDM				
						N Neoprene				
						Z FFKM				

- For oxygen-enriched atmosphere or hazardous media service, please contact FITOK Group or our authorized distributors.
- Cleaning and Packaging:
FC-01: Standard cleaning and packaging for general industrial procedures.
FC-02: Special cleaning and packaging for wetted system components to ensure compliance with product cleanliness requirement of ASTM G93 Level C.
- The materials, connection types and sizes listed in the "Ordering Number Description" are standard. For other materials and end connections, please contact FITOK Group or our authorized distributors.
- Check valve is designed with unidirectional flow path, it can't be used as safety relief valve.
- If the check valve is not opened for a period of time, its initial cracking pressure may be higher than set cracking pressure.
- For the specified cracking pressure of check valve, please indicate its value to be set when ordering.

Relief Valves


RUV and RV Series

Introduction

Relief valve opens when system pressure exceeds the set pressure, allowing the medium to flow out to relieve the system pressure, and closes when the system pressure decreases to the resealing pressure.

RUV Series

- ⦿ Compact design with one-piece body
- ⦿ Standard seat: FKM
- ⦿ Temperature: -10 °F to 300 °F (-23 °C to 148 °C)
- ⦿ Cracking pressure: 25 to 500 psig (1.7 to 34.5 bar)
- ⦿ Set pressure by nut adjustment and spring replacement




Item	Component	Material/Specification
1	Body	316L SS
2	Seal Assembly	316L SS + FKM or NBR or EPDM or FFKM
3	Spring	302 SS
4	Spring Gasket	PTFE
5	Adjusting Nut	316L SS
6	Lock Nut	316L SS
7	Prevailing Torque Type Wire Thread Insert	304 SS

Temperature Range of Sealing Material


O-ring Material	Temperature Range °F (°C)
FKM	25 to 250 (-4 to 121)
NBR	0 to 212 (-17 to 100)
CR	-10 to 300 (-23 to 148)
EPDM	30 to 250 (-1 to 121)

RV Series

- ⦿ Set pressure: 7 color-coded springs available for a wide range of set pressures, 50 to 6000 psig @ 70°F (3.4 to 414 bar @ 20°C)
- ⦿ Maximum outlet pressure:RV series: 1500 psig (103 bar)
- ⦿ Orifice size: RV series: 0.14" (3.6 mm)
- ⦿ Back pressure:
Back pressure is the pressure of the outlet of valves. It increases the set pressure of proportional relief valves.
RV series: Balanced stem design to eliminate the effect of system back pressure
- ⦿ Working temperature: -40°F to 300°F (-40°C to 148°C)
- ⦿ Variety of end connections
- ⦿ Liquid or gas service
- ⦿ Adjustable bonnet cap and adjustable set pressure
- ⦿ Lead seal lock wire through lock wire holes to lock proportional relief valve so as to secure a set pressure effectively
- ⦿ Variety of seal materials
- ⦿ Label identifies the set pressure range

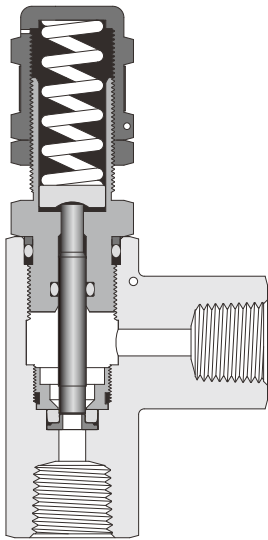

Ordering Number Description

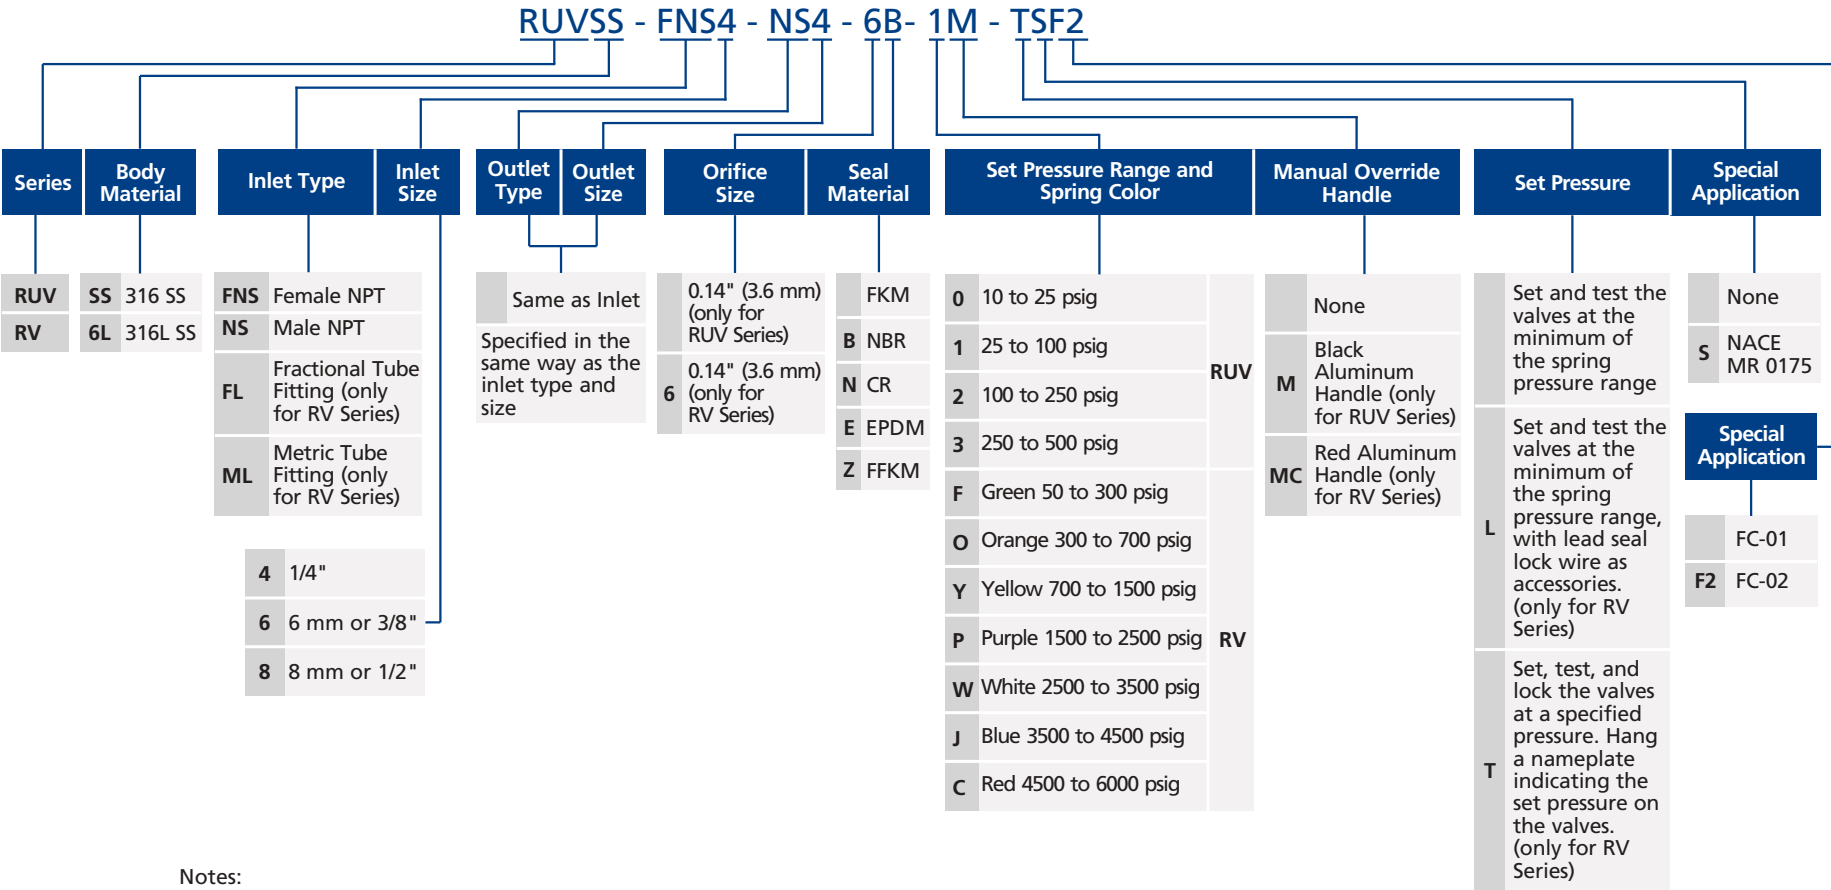

- Notes:
- 1. "Ordering Number Description" is a reference to understand the combination rules of FITOK product part number. Not all combinations are available.
 - 2. Set pressure can be factory set upon request, please leave a note of desired set pressure when ordering.

Tee-Type Filters


FT Series

Features

- Filtration area type: 4 and 8
- Union bonnet design to prevent lock nut from falling off and offer added safety
- Working pressure up to: 6000 psig (414 bar)
- Working temperature: -20 °F to 900 °F (-28 °C to 482 °C)
- Variety of end connections available




Filters Ordering Number Description

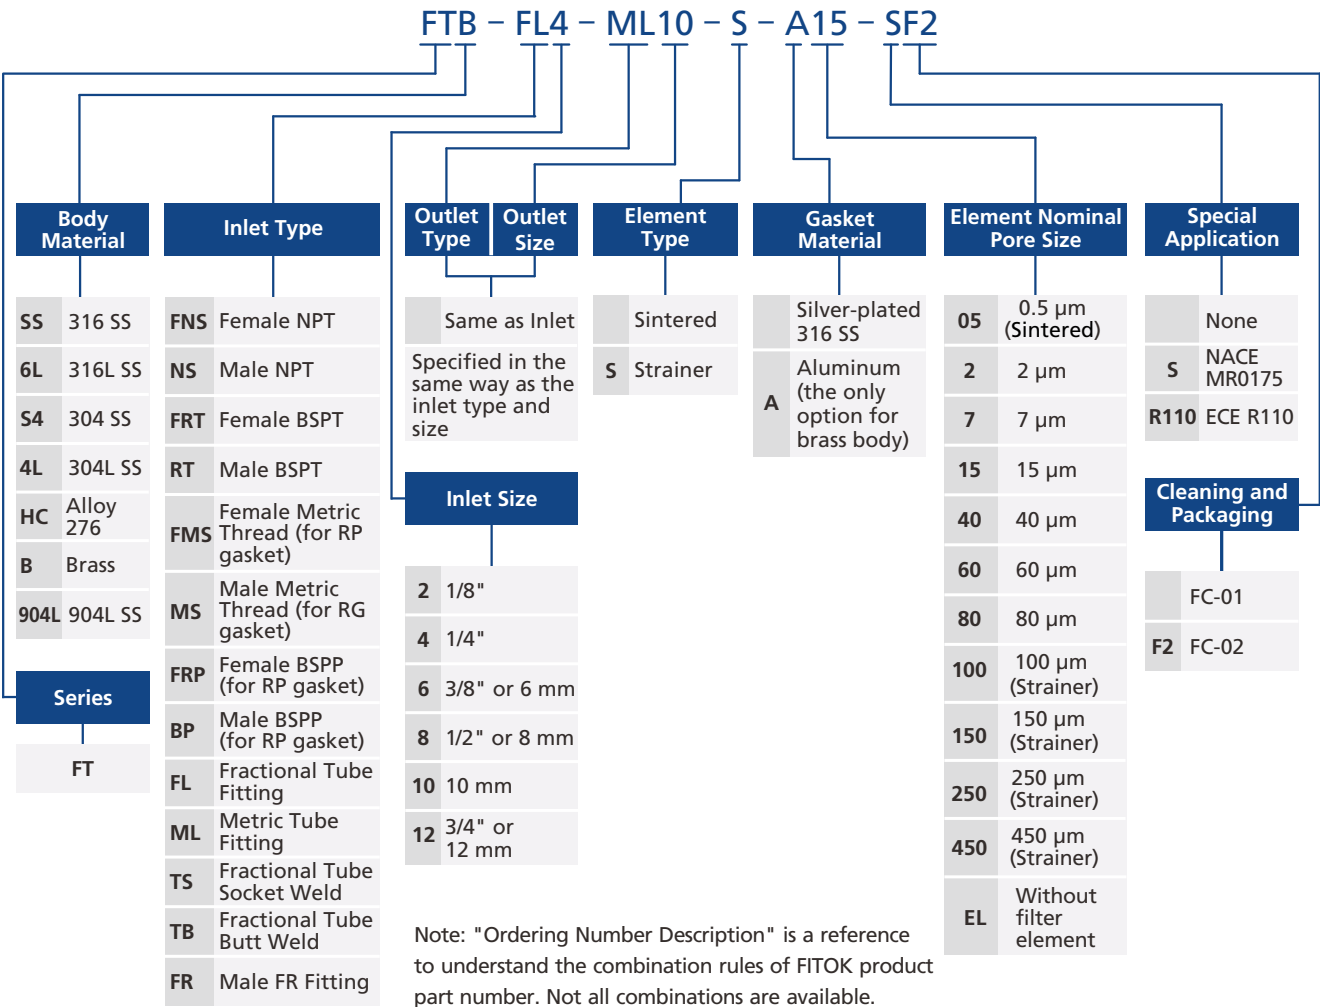

- Cleaning and Packaging:
 - FC-01: Standard cleaning and packaging for basic industrial procedures.
 - FC-02: Special cleaning and packaging for wetted system components to ensure compliance requirement as stated in ASTM G93 Level C.
- Standard thread pitch for metric threads are as follows:
 - M10 and below: 1 mm
 - M12 to M24: 1.5 mm
 - M27 and above: 2 mmStandard thread pitch should be ignored in the ordering number, others should be specified.

Elements Ordering Number Description

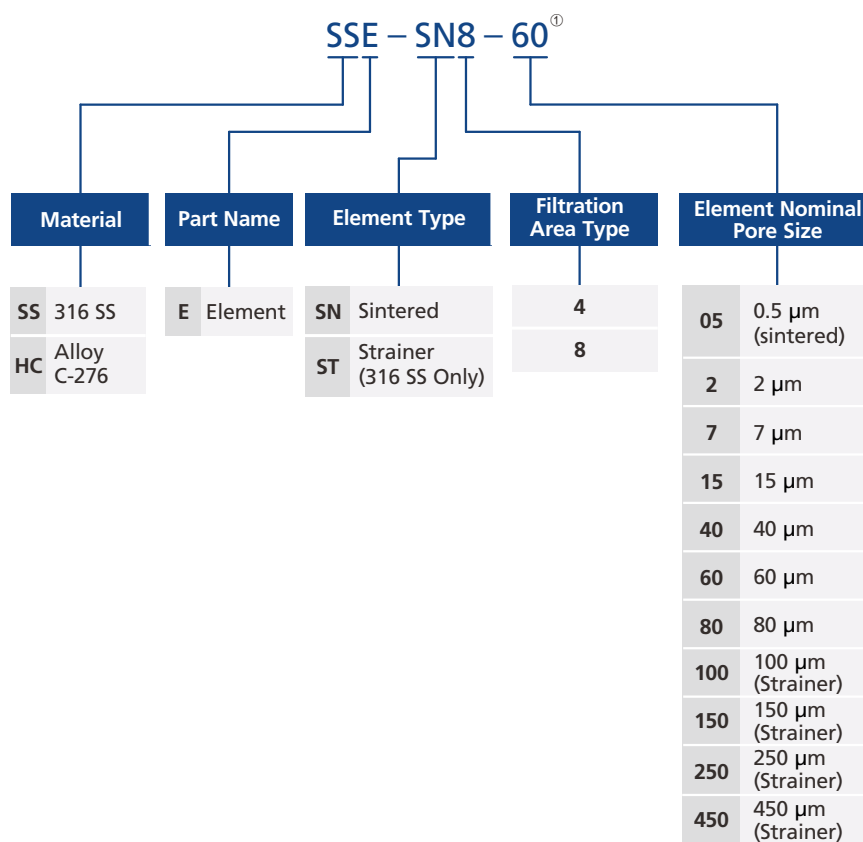

① The FT and FB series filters share identical filter element models, while some filter element models for the FI series filters are also same with the FT and FB series. A filter element model represents a single, consistent filter product, meaning one filter element can be used across multiple filter series.

Note: "Ordering Number Description" is a reference to understand the combination rules of FITOK product part number.
Not all combinations are available.

Bypass Filters


FB Series

Features

- Filtration area type: 4 and 8
- Union bonnet design to prevent lock nut from falling off and offer added safety
- Working pressure up to: 6000 psig (414 bar)
- Working temperature: -20 °F to 900 °F (-28 °C to 482 °C)
- Variety of end connections available



Filters Ordering Number Description

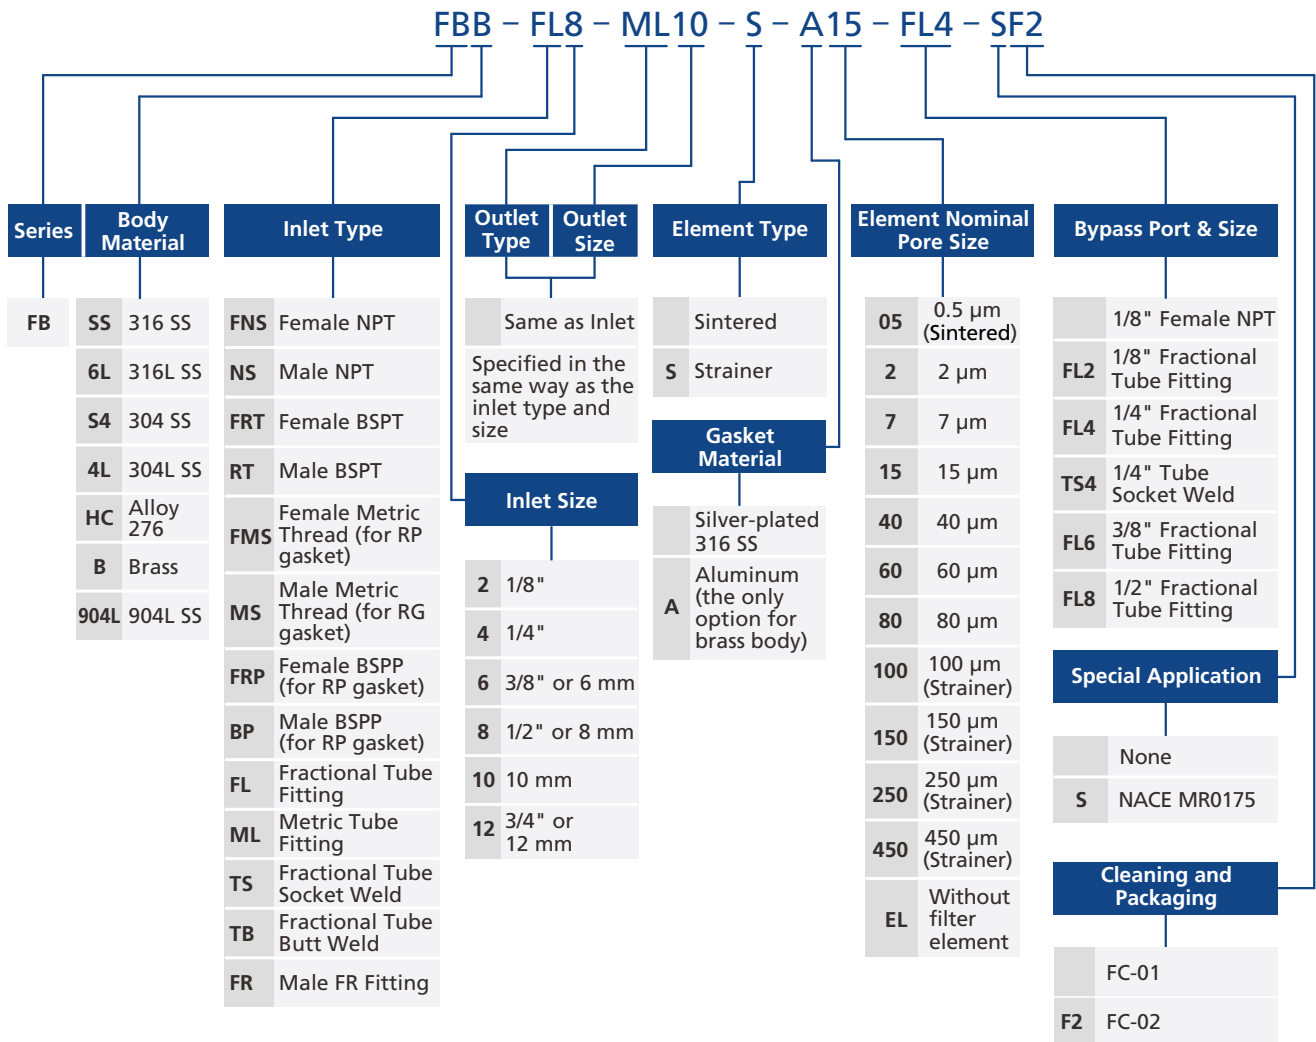

Note: "Ordering Number Description" is a reference to understand the combination rules of FITOK product part number. Not all combinations are available.

1. Cleaning and Packaging:

FC-01: Standard cleaning and packaging for basic industrial procedures.

FC-02: Special cleaning and packaging for wetted system components to ensure compliance requirement as stated in ASTM G93 Level C.

2. Standard thread pitch for metric threads are as follows:


M10 and below: 1 mm

M12 to M24: 1.5 mm

M27 and above: 2 mm

Standard thread pitch should be ignored in the ordering number, others should be specified.

Elements Ordering Number Description

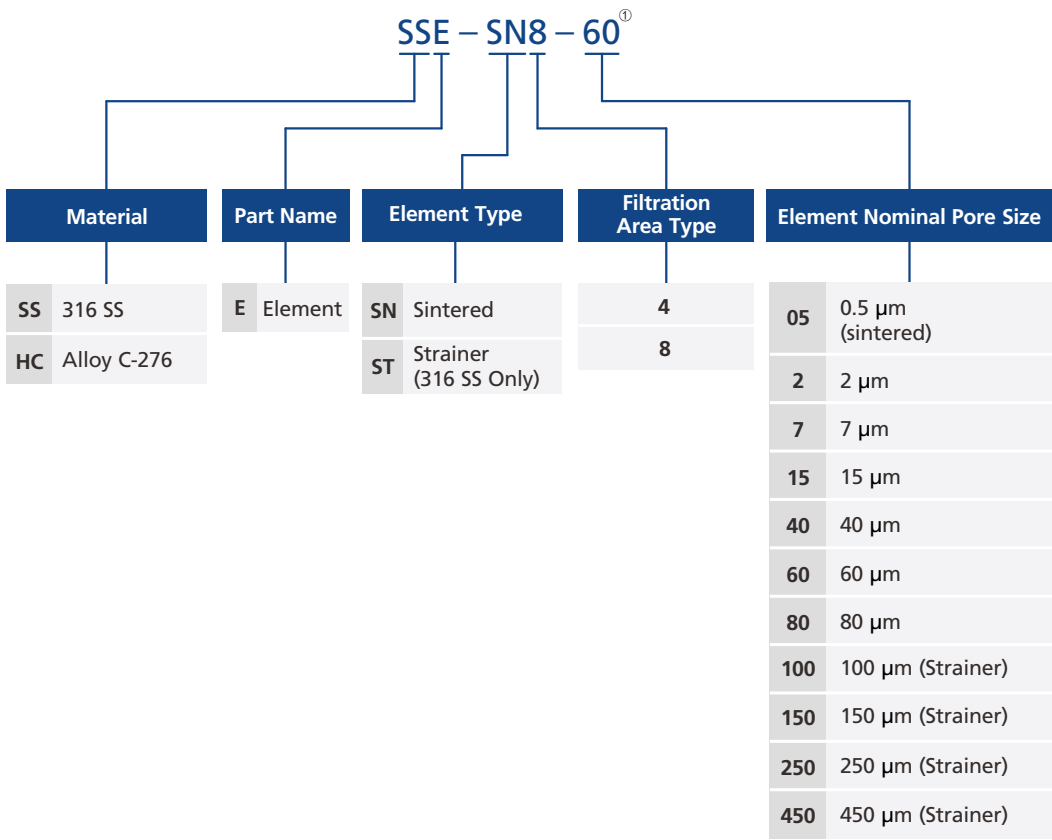

① The FT and FB series filters share identical filter element models, while some filter element models for the FI series filters are also same with the FT and FB series. A filter element model represents a single, consistent filter product, meaning one filter element can be used across multiple filter series.

Note: "Ordering Number Description" is a reference to understand the combination rules of FITOK product part number.
Not all combinations are available.

In-Line Filters


FI Series

Features

- Filtration area type: 2, 4 and 8
- Compact and space-saving design
- Working pressure up to: 3000 psig (207 bar)
- Working temperature: -20 °F to 900 °F (-28 °C to 482 °C)
- Variety of end connections available




Filters Ordering Number Description

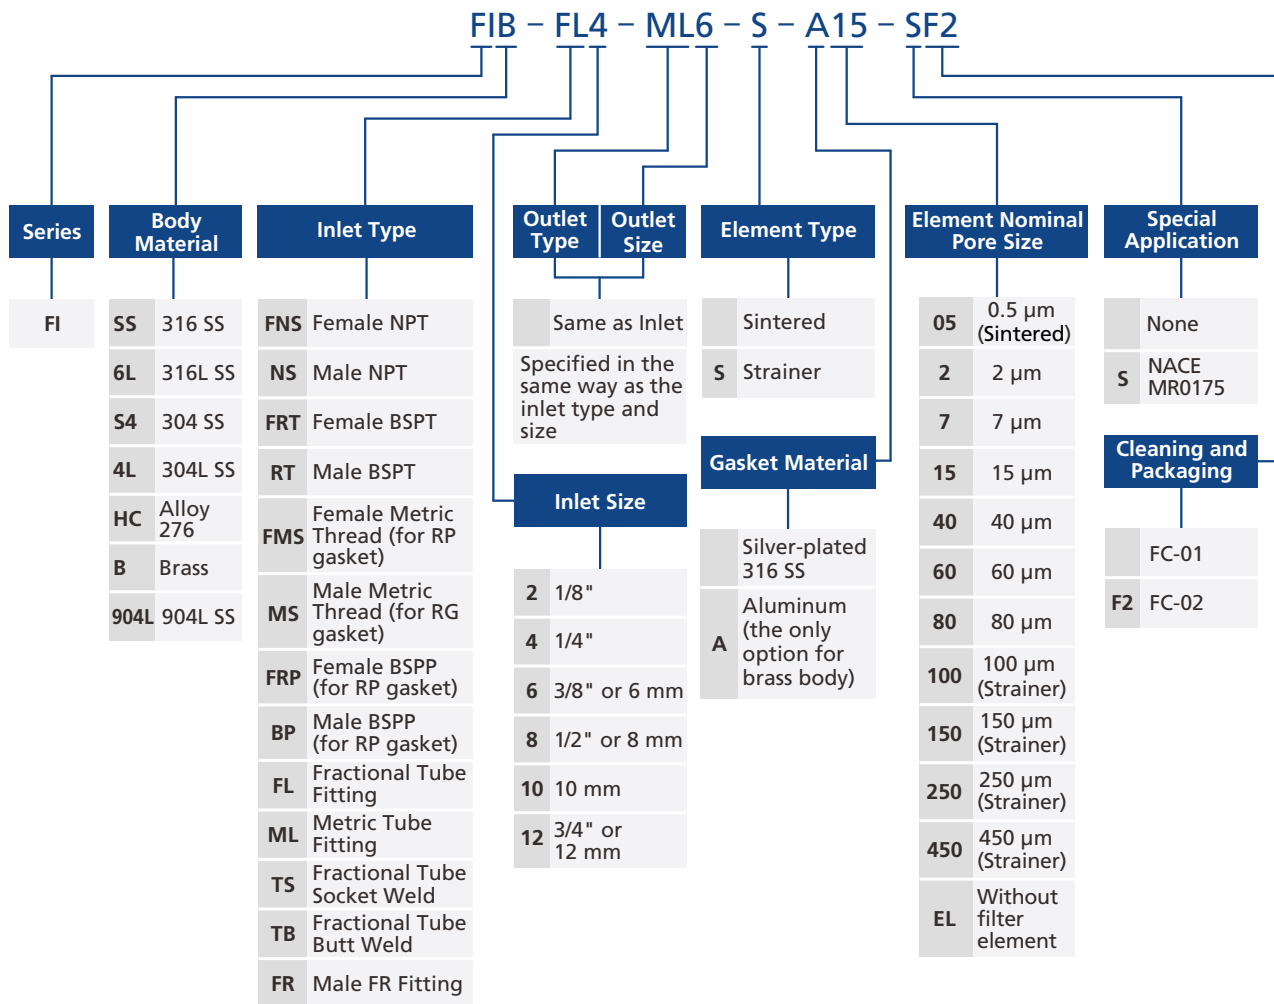

Note: "Ordering Number Description" is a reference to understand the combination rules of FITOK product part number. Not all combinations are available.

- Cleaning and Packaging:
 - FC-01: Standard cleaning and packaging for basic industrial procedures.
 - FC-02: Special cleaning and packaging for wetted system components to ensure compliance requirement as stated in ASTM G93 Level C.
- Standard thread pitch for metric threads are as follows:
 - M10 and below: 1 mm
 - M12 to M24: 1.5 mm
 - M27 and above: 2 mm
 Standard thread pitch should be ignored in the ordering number, others should be specified.

Elements Ordering Number Description

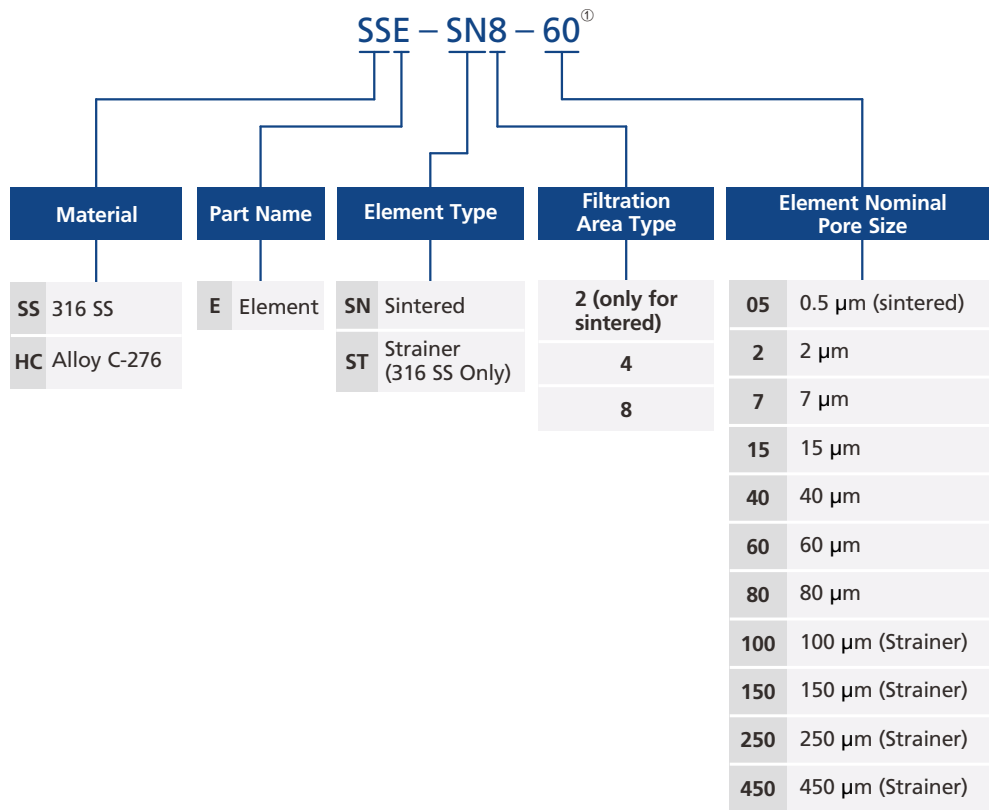

① The FT and FB series filters share identical filter element models, while some filter element models for the FI series filters are also same with the FT and FB series. A filter element model represents a single, consistent filter product, meaning one filter element can be used across multiple filter series.

Note: "Ordering Number Description" is a reference to understand the combination rules of FITOK product part number.
Not all combinations are available.

All-Welded In-Line Filters

FW Series

Features

- Full-penetration weld between body and filter element
- Working pressure up to: 6000 psig (414 bar)
- Working temperature: -20 °F to 900 °F (-28 °C to 482 °C)
- Variety of end connections available



Filters Ordering Number Description

FWSS – FL6 – ML10 – S – 15 – SF2														
Series		Body Material		Inlet Type		Outlet Type	Outlet Size	Element Type		Element Nominal Pore Size		Special Application	Cleaning and Packaging	
FW	SS	316 SS	FNS	Female NPT	Same as Inlet	Specified in the same way as the inlet type and size	Sintered	05	0.5 µm (Sintered)	None	S	NACE MR0175	F2	FC-02
	6L	316L SS	NS	Male NPT				2	2 µm (Strainer)					
	S4	304 SS	FRT	Female BSPT	Inlet Size		SF	7	7 µm (Strainer)					
	4L	304L SS	RT	Male BSPT				15	15 µm (Strainer)					
	904L	904L SS	FMS	Female Metric Thread (for RP gasket)										
			MS	Male Metric Thread (for RG gasket)										
			FRP	Female BSPP (for RP gasket)										
			BP	Male BSPP (for RP gasket)										
			FL	Fractional Tube Fitting										
			ML	Metric Tube Fitting										
			TB	Fractional Tube Butt Weld										
			FR	Male FR Fitting										
				2	1/8"									
				4	1/4"									
				6	3/8" or 6 mm									
				8	1/2" or 8 mm									
				10	10 mm									
				12	3/4" or 12 mm									

Note: "Ordering Number Description" is a reference to understand the combination rules of FITOK product part number. Not all combinations are available.

- Cleaning and Packaging:
 - FC-01: Standard cleaning and packaging for basic industrial procedures.
 - FC-02: Special cleaning and packaging for wetted system components to ensure compliance requirement as stated in ASTM G93 Level C.
- Standard thread pitch for metric threads are as follows:
 - M10 and below: 1 mm
 - M12 to M24: 1.5 mm
 - M27 and above: 2 mm

Note: "Ordering Number Description" is a reference to understand the combination rules of FITOK product part number. Not all combinations are available.

- Cleaning and Packaging:
 - FC-01: Standard cleaning and packaging for basic industrial procedures.
 - FC-02: Special cleaning and packaging for wetted system components to ensure compliance requirement as stated in ASTM G93 Level C.
- Standard thread pitch for metric threads are as follows:
 - M10 and below: 1 mm
 - M12 to M24: 1.5 mm
 - M27 and above: 2 mmStandard thread pitch should be ignored in the ordering number, others should be specified.

High-Capacity Filters


FH Series

Features

- Filtration area type: 4H and 8H
- Bypass port at filter bottom optional for the ease of sampling or purging
- Elements equipped with retention levers for easy disassembling, cleaning and replacement
- Standard seal materials: FKM and PTFE
- Working pressure up to 5000 psig
- Variety of end connections optional



Filters Ordering Number Description

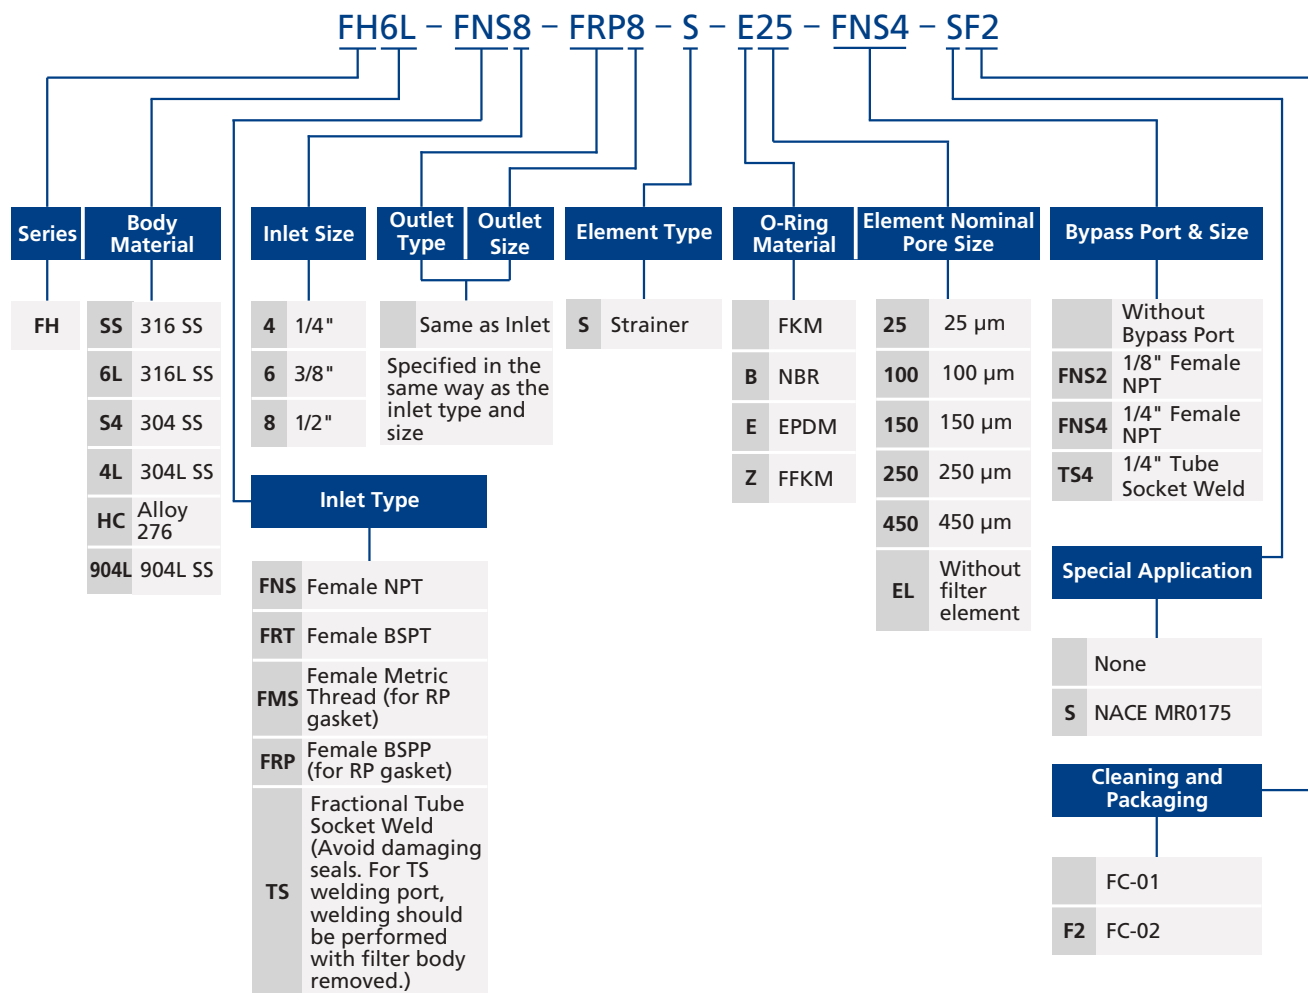


Note: "Ordering Number Description" is a reference to understand the combination rules of FITOK product part number. Not all combinations are available.

1. Cleaning and Packaging:

FC-01: Standard cleaning and packaging for basic industrial procedures.

FC-02: Special cleaning and packaging for wetted system components to ensure compliance requirement as stated in ASTM G93 Level C.

Elements Ordering Number Description

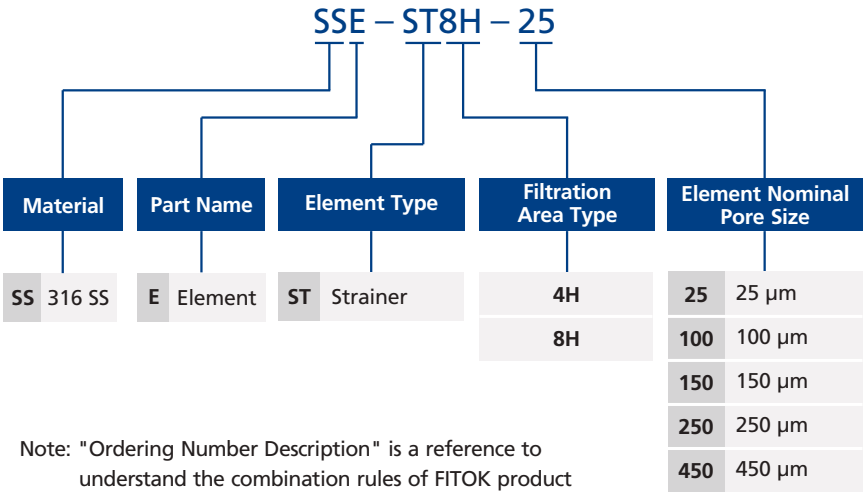


Tube Fittings

6D Series



Features


- ⦿ Sizes range from 1/16" to 2" and 2 mm to 50 mm
- ⦿ Diverse materials and configurations are available
- ⦿ Precision machined components ensure perfect deformation of the ferrules and tubing
- ⦿ Hardened threads with smooth surface finish avoid galling and help to extend the fitting service life
- ⦿ Female nut threads are silver-plated to reduce the friction against the body threads
- ⦿ Radius junction design for elbows provides smooth flow path
- ⦿ Every fitting is marked with size, material and heat number
- ⦿ Fittings are easy to disconnect and retighten
- ⦿ 1/8" to 5/8", 3 mm to 16 mm fittings available with EC-79 certification

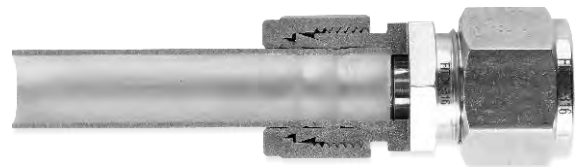

Ordering Information and Dimensions

Dimensions are for reference only and are subject to change; Dimensions are shown with FITOK nuts finger-tight.

Male Connectors




The E dimension refers to the smallest nominal orifice. It might be larger at tapered thread end, straight thread end.

Fractional Tube			NPT Thread					
T-Tube O.D. (in.)	P-NPT Size	Basic Ordering Number	Dimension, in. (mm)					
			L	B	C	E	G	F
1/4	1/4	-CM-FL4-NS4	1.49(37.8)	0.56(14.2)	0.60(15.2)	0.19(4.8)	0.56(14.3)	0.56(14.3)
3/8	3/8	-CM-FL6-NS6	1.57(39.9)	0.56(14.2)	0.66(16.8)	0.28(7.1)	0.69(17.5)	0.69(17.5)
1/2	1/2	-CM-FL8-NS8	1.93(49.0)	0.75(19.1)	0.90(22.9)	0.41(10.4)	0.87(22.2)	0.87(22.2)

Metric Tube			NPT Thread					
T-Tube O.D. (mm)	P-NPT Size	Basic Ordering Number	Dimension, mm (in.)					
			L	B	C	E	G	F
6	1/4	-CM-ML6-NS4	37.9(1.49)	14.2(0.56)	15.3(0.60)	4.8(0.19)	14.0(0.55)	14.0(0.55)
8	3/8	-CM-ML8-NS6	39.3(1.55)	14.2(0.56)	16.2(0.64)	6.4(0.25)	16.0(0.63)	18.0(0.71)
10	3/8	-CM-ML10-NS6	40.9(1.61)	14.2(0.56)	17.2(0.68)	7.9(0.31)	19.0(0.75)	18.0(0.71)
12	1/2	-CM-ML12-NS8	49.0(1.93)	19.1(0.75)	22.8(0.90)	9.5(0.37)	22.0(0.87)	22.0(0.87)


Unions



Fractional Tube			Dimension, in. (mm)				
T-Tube O.D. (in.)	Basic Ordering Number		L	C	G	F	E
1/4	-U-FL4		1.61(40.9)	0.60(15.2)	0.56(14.3)	0.50(12.7)	0.19(4.8)
3/8	-U-FL6		1.77(45.0)	0.66(16.8)	0.69(17.5)	0.63(15.9)	0.28(7.1)
1/2	-U-FL8		2.02(51.3)	0.90(22.9)	0.87(22.2)	0.81(20.6)	0.41(10.4)


Metric Tube			Dimension, mm (in.)				
T-Tube O.D. (mm)	Basic Ordering Number		L	C	G	F	E
6	-U-ML6		41.0(1.61)	15.3(0.60)	14.0(0.55)	14.0(0.55)	4.8(0.19)
8	-U-ML8		43.2(1.70)	16.2(0.64)	16.0(0.63)	15.0(0.59)	6.4(0.25)
10	-U-ML10		46.2(1.82)	17.2(0.68)	19.0(0.75)	18.0(0.71)	7.9(0.31)
12	-U-ML12		51.2(2.02)	22.8(0.90)	22.0(0.87)	22.0(0.87)	9.5(0.37)

Conversion Unions



Metric Tube			Fractional Tube							
T-Tube O.D. (mm)	Tx-Tube O.D. (in.)	Basic Ordering Number	Dimension, mm (in.)							
			L	C	G	F	E	Cx	Gx	
6	1/8	-U-ML6-FL2	38.5(1.52)	15.3(0.60)	14.0(0.55)	14.0(0.55)	2.4(0.09)	12.7(0.50)	11.1(0.44)	
8	1/4	-U-ML8-FL4	42.3(1.67)	16.2(0.64)	16.0(0.63)	15.0(0.59)	4.8(0.19)	15.2(0.60)	14.3(0.56)	
10	1/4	-U-ML10-FL4	44.5(1.75)	17.2(0.68)	19.0(0.75)	18.0(0.71)	4.8(0.19)	15.2(0.60)	14.3(0.56)	
10	3/8	-U-ML10-FL6	45.9(1.81)	17.2(0.68)	19.0(0.75)	18.0(0.71)	7.1(0.28)	16.8(0.66)	17.5(0.69)	
12	3/8	-U-ML12-FL6	48.4(1.91)	22.8(0.90)	22.0(0.87)	22.0(0.87)	7.1(0.28)	16.8(0.66)	17.5(0.69)	
16	5/8	-U-ML16-FL10	52.0(2.05)	24.4(0.96)	25.0(0.98)	24.0(0.94)	12.7(0.50)	24.4(0.96)	25.4(1.00)	
20	1/2	-U-ML20-FL8	55.0(2.17)	26.0(1.02)	32.0(1.26)	30.0(1.18)	10.4(0.41)	22.9(0.90)	22.2(0.87)	


Reducing Unions



Fractional Tube									
T-Tube O.D. (in.)	Tx-Tube O.D. (in.)	Basic Ordering Number	Dimension, in. (mm)						
			L	C	G	F	E	Cx	Gx
3/8	1/4	-U-FL6-FL4	1.70(43.2)	0.66(16.8)	0.69(17.5)	0.63(15.9)	0.19(4.8)	0.60(15.2)	0.56(14.3)
1/2	1/4	-U-FL8-FL4	1.85(47.0)	0.90(22.8)	0.87(22.2)	0.81(20.6)	0.19(4.8)	0.60(15.2)	0.56(14.3)
1/2	3/8	-U-FL8-FL6	1.91(48.5)	0.90(22.8)	0.87(22.2)	0.81(20.6)	0.28(7.1)	0.66(16.8)	0.69(17.5)

Metric Tube									
T-Tube O.D. (mm)	Tx-Tube O.D. (mm)	Basic Ordering Number	Dimension, mm (in.)						
			L	C	G	F	E	Cx	Gx
8	6	-U-ML8-ML6	42.3(1.67)	16.3(0.64)	16.0(0.63)	15.0(0.59)	4.8(0.19)	15.3(0.60)	14.0(0.55)
10	8	-U-ML10-ML8	45.1(1.78)	17.2(0.68)	19.0(0.75)	18.0(0.71)	6.4(0.25)	16.3(0.64)	16.0(0.63)
12	10	-U-ML12-ML10	48.7(1.92)	22.8(0.90)	22.0(0.87)	22.0(0.87)	7.9(0.31)	17.2(0.68)	19.0(0.75)

Male Elbows



Fractional Tube			NPT Thread						
T-Tube O.D. (in.)	P-NPT Size	Basic Ordering Number	Dimension, in. (mm)						
			L	C	G	F	E	B	Lx
1/4	1/4	-LM-FL4-NS4	1.06(26.9)	0.60(15.2)	0.56(14.3)	0.50(12.7)	0.19(4.8)	0.56(14.2)	0.92(23.4)
3/8	3/8	-LM-FL6-NS6	1.23(31.2)	0.66(16.8)	0.69(17.5)	0.69(17.5)	0.28(7.1)	0.56(14.2)	1.03(26.2)
1/2	1/2	-LM-FL8-NS8	1.42(36.1)	0.90(22.9)	0.87(22.2)	0.81(20.6)	0.41(10.4)	0.75(19.1)	1.30(33.0)


Metric Tube			NPT Thread						
T-Tube O.D. (mm)	P-NPT Size	Basic Ordering Number	Dimension, mm (in.)						
			L	C	G	F	E	B	Lx
6	1/4	-LM-ML6-NS4	27.0(1.06)	15.3(0.60)	14.0(0.55)	12.7(0.50)	4.8(0.19)	14.2(0.56)	23.4(0.92)
8	3/8	-LM-ML8-NS6	30.6(1.20)	16.2(0.64)	16.0(0.63)	17.5(0.69)	6.4(0.25)	14.2(0.56)	26.2(1.03)
10	3/8	-LM-ML10-NS6	31.5(1.24)	17.2(0.68)	19.0(0.75)	17.5(0.69)	7.9(0.31)	14.2(0.56)	26.2(1.03)
12	1/2	-LM-ML12-NS8	36.0(1.42)	22.8(0.90)	22.0(0.87)	20.6(0.81)	9.5(0.37)	19.1(0.75)	33.0(1.30)

Metal Flexible Hoses

MH, MM Series

Features

- Core tube and fitting material: 316, 316L stainless steel
- Overbraid material: 304 stainless steel (316 SS available)
- Vacuum and positive pressure applications
- Working pressure up to: 3100 psig (213 bar)
- Nominal hose size: 1/4" to 2"
- End connections:
 - 1/4" to 2" pipe thread
 - 1/4" to 2" and 6 mm to 50 mm tube fitting
- Working temperature: -325 °F to 800 °F (-200 °C to 426 °C)
- Welded fitting-to-hose construction to ensure reliable seal
- Standard and custom length available

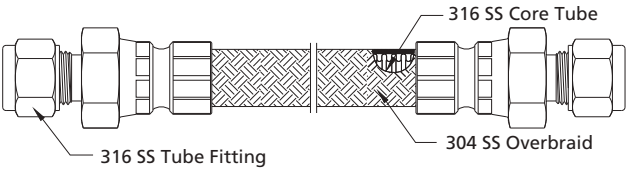


Hose Technical Data (MH Series)

Nominal Hose Size	Inside Diameter	Min. Bend Radius		Temperature Range	Working Pressure at 70°F (20°C)	Min. Burst Pressure at 70°F (20°C)
		Static	Dynamic			
in. (mm)	in. (mm)	in. (mm)	in. (mm)	°F (°C)	psig (bar)	psig (bar)
1/4 (6.4)	0.28 (7.1)	2.25 (57.2)	10.0 (254)	-325 to 800 (-200 to 426)	3100 (213)	12400 (854)
3/8 (9.7)	0.42 (10.6)	3.00 (76.2)	12.0 (305)		2000 (137)	8000 (551)
1/2 (12.7)	0.53 (13.5)	4.50 (114)	16.0 (406)		1800 (124)	7200 (496)
3/4 (19.0)	0.80 (20.3)	6.00 (152)	17.0 (432)		1500 (103)	6000 (413)
1 (25.4)	1.03 (26.0)	6.75 (171)	20.0 (508)		1200 (82.6)	4800 (330)
1 1/4 (31.8)	1.30 (33.0)	8.86 (225)	23.0 (584)		950 (65.4)	3800 (261)
1 1/2 (38.1)	1.53 (38.9)	11.0 (280)	26.0 (660)		900 (62.0)	3600 (248)
2 (50.8)	2.05 (52.1)	13.8 (350)	32.0 (813)		500 (34.4)	2000 (137)

Hose Technical Data (MM Series)

Nominal Hose Size	Inside Diameter	Min. Bend Radius				Temperature Range	Working Pressure at 70°F (20°C)	Min. Burst Pressure at 70°F (20°C)
		Helical Convoluted Core		Annular Convoluted Core				
		Static	Dynamic	Static	Dynamic			
in. (mm)	in. (mm)	in. (mm)	in. (mm)	in. (mm)	in. (mm)	°F (°C)	psig (bar)	psig (bar)
1/4 (6.4)	0.25 (6.4)	1.38 (35)	8.66 (220)	0.79 (20)	4.33 (110)	-325 to 800 (-200 to 426)	1600 (110)	6400 (440)
3/8 (9.7)	0.38 (9.5)	2.36 (60)	10.40 (264)	0.98 (25)	5.91 (150)		1470 (101)	6000 (413)
1/2 (12.7)	0.50 (12.7)	2.95 (75)	11.89 (302)	1.18 (30)	4.88 (124)		1110 (76.4)	4500 (310)
3/4 (19.0)	0.75 (19.0)	3.54 (90)	13.58 (345)	1.50 (38)	6.65 (169)		860 (59.2)	3500 (241)
1 (25.4)	1.00 (25.4)	4.13 (105)	15.00 (381)	1.77 (45)	7.68 (195)		680 (46.8)	2680 (184)
1 1/4 (31.8)	1.25 (31.8)	4.72 (120)	16.22 (412)				680 (46.8)	2600 (179)
1 1/2 (38.1)	1.50 (38.1)	5.51 (140)	16.89 (429)				520 (35.8)	2200 (151)
2 (50.8)	2.00 (50.8)	6.30 (160)	18.43 (468)				450 (31.0)	1800 (124)

Ordering Number Description

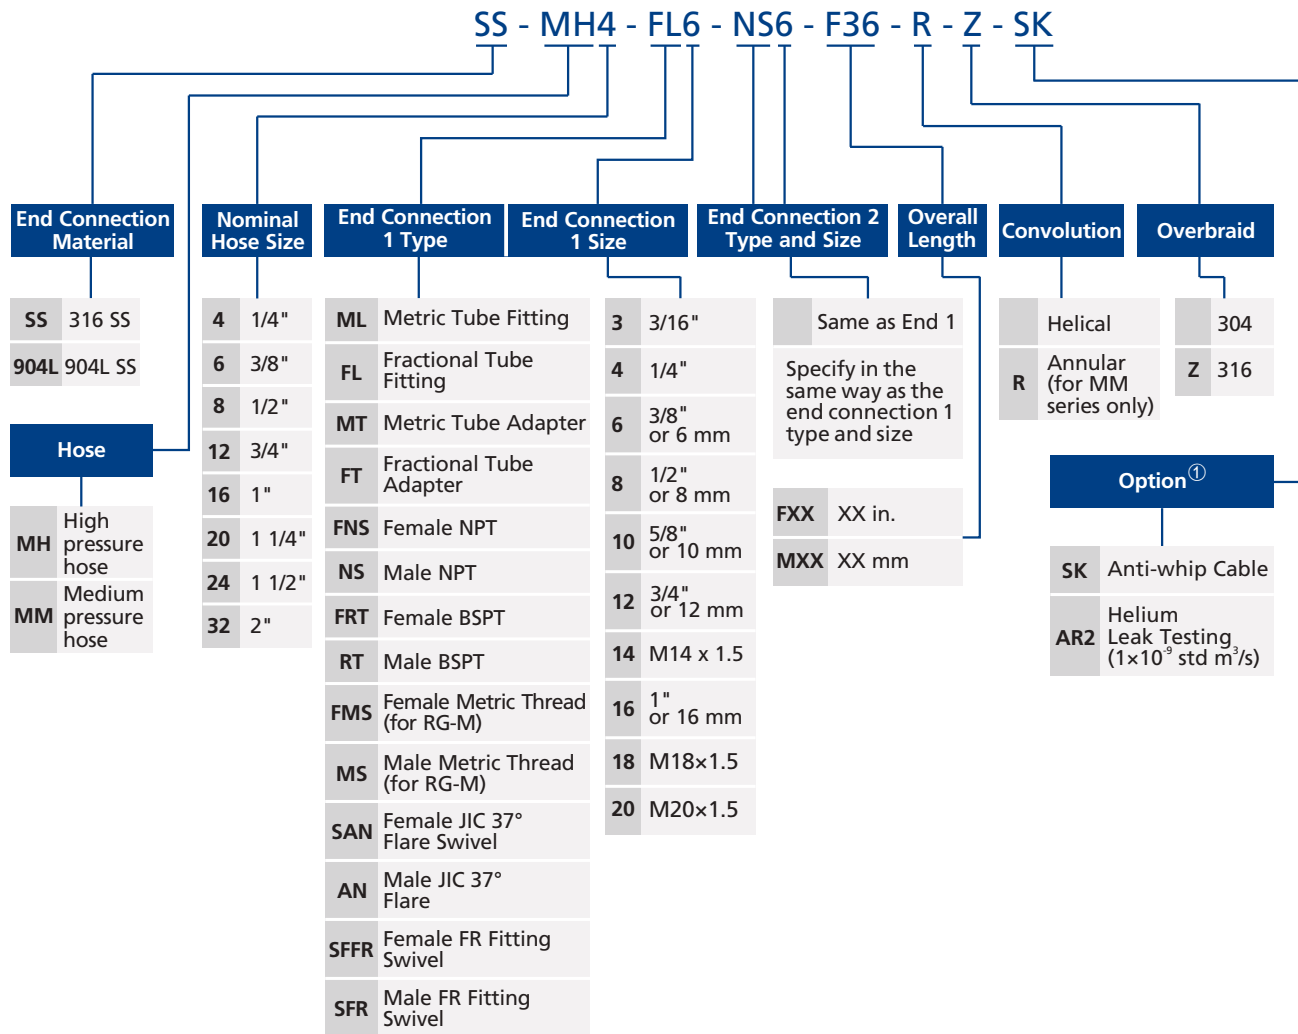

Note: "Ordering Number Description" is a reference to understand the combination rules of FITOK product part number. Not all combinations are available.

① To order multiple options, please add designators in alphabetical order and separate them with dashes.

Example: SS-MH4-FT6-M710

SS: End connection material is 316 stainless steel.

MH4: MH series, nominal hose size is 1/4".

FT6: End connection 1 is 3/8" tube adapter.

End connection 2 is 3/8" tube adapter.

M710: Overall length is 710 mm.

Connections are described based on the following rules:

1. Metric Tube Fitting - Fractional Tube Fitting - Metric Tube Adapters - Fractional Tube Adapters - NPT Threads - BSPT Threads - BSPP Threads - SAE/MS Parallel Threads - 37° Flare - Others
2. Put the sizes from the biggest down to the smallest if they are of the same type.
3. Put the female before male if they are of the same type and size.

Cylinder Connections



CGA DISS Series	B-31
-----------------	------

CGA Series	B-35
------------	------

DIN Series	B-42
------------	------

Gas Connection Assignment Table	B-43
---------------------------------	------

Features

- ⦿ 100% visual inspection of critical surfaces
- ⦿ Diverse material and configurations available
- ⦿ Silver-plated nut threads to reduce installation torque
- ⦿ Every fitting marked with size, material and heat number
- ⦿ Customized solutions available

Material


Series	Component	Material	Designator
CGA DISS	Nipples	316L SS	6L
	Nuts	304 SS	S4
	Gaskets	Nickel 200	NI
		PCTFE	K
		Aluminum	AL
	Plugs	316L SS	6L
	Adapters	316L SS	6L
CGA DIN	Caps	316L SS	6L
	Nipples	316L SS	6L
	Nuts	304 SS	S4
	Gaskets	PTFE	T
		PCTFE	K
	Plugs, Caps	316L SS	6L
	Adapters	316L SS	6L

Notes:

1. Nickel gasket heat treated; surface hardness < HB 100
2. 316L SS in compliance with SEMI F20

Ordering information


- ⦿ Add material designator as a prefix to the basic ordering number to get the complete ordering number.
Example: 6L-C634-L-FR4
- ⦿ CGA, DIN Series
PTFE is standard material for gasket. If PCTFE is required, please add a suffix of "-k" to the ordering number.
Example: 6L-C350-NS4-K
- ⦿ CGA DISS Series
Nickel is standard material for gasket. If PCTFE is required, please add a suffix of "-k" to the ordering number.
Example: 6L-C632-FR4-K

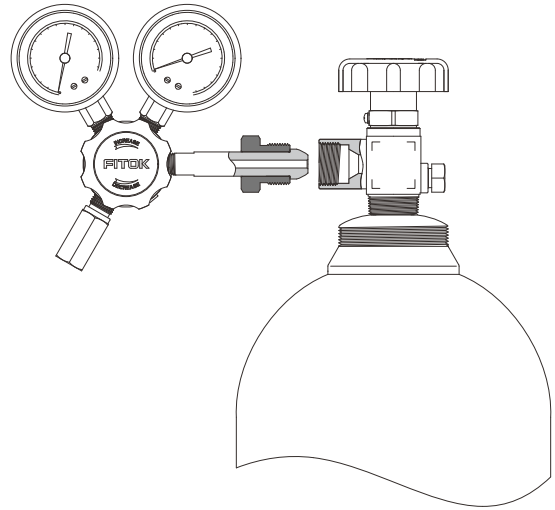

CGA DISS Series

- Designed and verified in compliance with the CGA V-1-2005 standard
- For nipples with TB or FR connections, inner surface electropolished to an average of Ra 9 µin. (0.23 µm), products comply with high purity process specification
- For nipples with NPT connections, inner surface electropolished to an average of Ra 16 µin. (0.4 µm), products comply with special cleaning and packaging, applicable to oxygen-enriched atmospheres
- Maximum allowable leak rate: 1×10⁻⁹ std cm³/s
- CGA DISS series cylinder connections are available with a variety of end connection types, such as 1/4" TB, 3/8" TB, 1/2" TB, 1/8" NPT, 1/4" NPT, 3/8" NPT, 1/2" NPT, 1/4" FR, and 1/2" FR. The maximum working pressures for cylinder connections with these end connection types meet the requirements of the CGA V-1-2005 standard
- Maximum working pressures for cylinder connections are calculated at room temperature in accordance with CGA V-1-2005, ASME B31.3, and ASME B31.1 standards
- For other end connection types, please contact FITOK Group or our authorized distributors

Cylinder Connections (Including Nipples, Nuts and Gaskets)

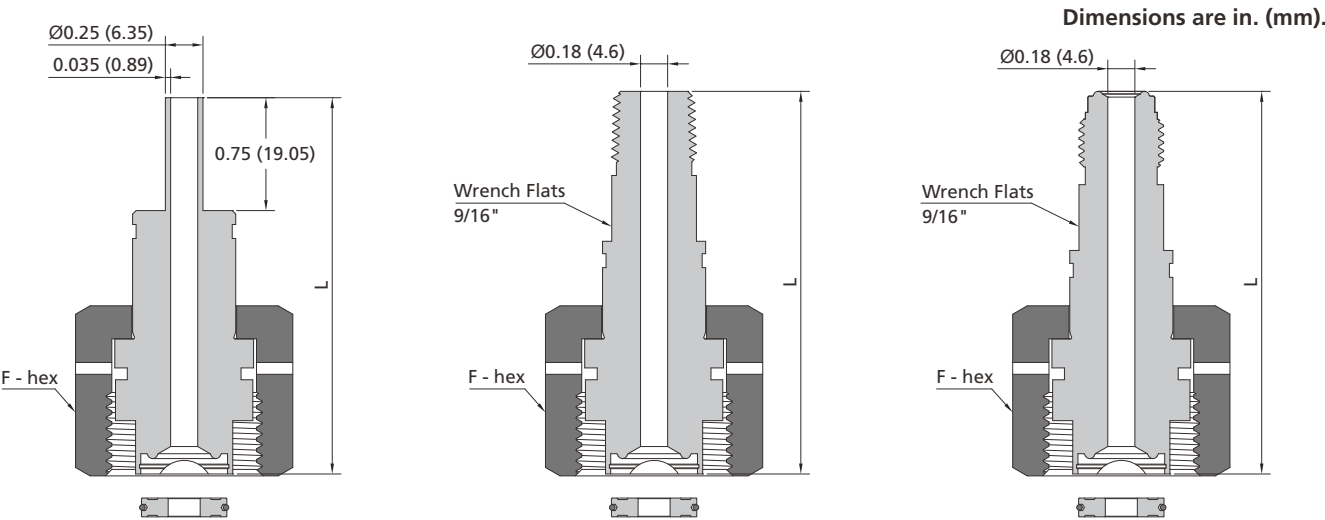

1/4" Butt Weld (TB)

Male NPT

Male Face Seal (FR)

CGA Number	End Connection	Assembly Basic Ordering Number	Nipple Basic Ordering Number	Nut Basic Ordering Number	Gasket Basic Ordering Number	Dimensions, in. (mm)	
						L	F
632	1/4" TB	-C632-TB4	-C632-L-TB4	-C630-N	-C630-GT	2.5 (63.5)	1 1/4 (31.8)
	1/4" FR	-C632-FR4	-C632-L-FR4			3 (76.2)	1 1/4 (31.8)
	1/4" NPT	-C632-NS4	-C632-L-NS4			3 (76.2)	1 1/4 (31.8)
634	1/4" TB	-C634-TB4	-C634-L-TB4	-C630-N	-C630-GT	2.5 (63.5)	1 1/4 (31.8)
	1/4" FR	-C634-FR4	-C634-L-FR4			3 (76.2)	1 1/4 (31.8)
	1/4" NPT	-C634-NS4	-C634-L-NS4			3 (76.2)	1 1/4 (31.8)
636	1/4" TB	-C636-TB4	-C636-L-TB4	-C630-N	-C630-GT	2.5 (63.5)	1 1/4 (31.8)
	1/4" FR	-C636-FR4	-C636-L-FR4			3 (76.2)	1 1/4 (31.8)
	1/4" NPT	-C636-NS4	-C636-L-NS4			3 (76.2)	1 1/4 (31.8)
638	1/4" TB	-C638-TB4	-C638-L-TB4	-C630-N	-C630-GT	2.5 (63.5)	1 1/4 (31.8)
	1/4" FR	-C638-FR4	-C638-L-FR4			3 (76.2)	1 1/4 (31.8)
	1/4" NPT	-C638-NS4	-C638-L-NS4			3 (76.2)	1 1/4 (31.8)

CGA Number	End Connection	Assembly Basic Ordering Number	Nipple Basic Ordering Number	Nut Basic Ordering Number	Gasket Basic Ordering Number	Dimensions, in. (mm)	
						L	F
640	1/4" TB	-C640-TB4	-C640-L-TB4	-C630-N	-C630-GT	2.5 (63.5)	1 1/4 (31.8)
	1/4" FR	-C640-FR4	-C640-L-FR4			3 (76.2)	1 1/4 (31.8)
	1/4" NPT	-C640-NS4	-C640-L-NS4			3 (76.2)	1 1/4 (31.8)
642	1/4" TB	-C642-TB4	-C642-L-TB4	-C630-N	-C630-GT	2.5 (63.5)	1 1/4 (31.8)
	1/4" FR	-C642-FR4	-C642-L-FR4			3 (76.2)	1 1/4 (31.8)
	1/4" NPT	-C642-NS4	-C642-L-NS4			3 (76.2)	1 1/4 (31.8)
712	1/4" TB	-C712-TB4	-C712-L-TB4	-C710-N	-C630-GT	2.5 (63.5)	1 3/8 (34.9)
	1/4" FR	-C712-FR4	-C712-L-FR4			3 (76.2)	1 3/8 (34.9)
	1/4" NPT	-C712-NS4	-C712-L-NS4			3 (76.2)	1 3/8 (34.9)
714	1/4" TB	-C714-TB4	-C714-L-TB4	-C710-N	-C630-GT	2.5 (63.5)	1 3/8 (34.9)
	1/4" FR	-C714-FR4	-C714-L-FR4			3 (76.2)	1 3/8 (34.9)
	1/4" NPT	-C714-NS4	-C714-L-NS4			3 (76.2)	1 3/8 (34.9)
716	1/4" TB	-C716-TB4	-C716-L-TB4	-C710-N	-C630-GT	2.5 (63.5)	1 3/8 (34.9)
	1/4" FR	-C716-FR4	-C716-L-FR4			3 (76.2)	1 3/8 (34.9)
	1/4" NPT	-C716-NS4	-C716-L-NS4			3 (76.2)	1 3/8 (34.9)
718	1/4" TB	-C718-TB4	-C718-L-TB4	-C710-N	-C630-GT	2.5 (63.5)	1 3/8 (34.9)
	1/4" FR	-C718-FR4	-C718-L-FR4			3 (76.2)	1 3/8 (34.9)
	1/4" NPT	-C718-NS4	-C718-L-NS4			3 (76.2)	1 3/8 (34.9)
720	1/4" TB	-C720-TB4	-C720-L-TB4	-C720-N	-C630-GT	2.5 (63.5)	1 3/8 (34.9)
	1/4" FR	-C720-FR4	-C720-L-FR4			3 (76.2)	1 3/8 (34.9)
	1/4" NPT	-C720-NS4	-C720-L-NS4			3 (76.2)	1 3/8 (34.9)
722	1/4" TB	-C722-TB4	-C722-L-TB4	-C720-N	-C630-GT	2.5 (63.5)	1 3/8 (34.9)
	1/4" FR	-C722-FR4	-C722-L-FR4			3 (76.2)	1 3/8 (34.9)
	1/4" NPT	-C722-NS4	-C722-L-NS4			3 (76.2)	1 3/8 (34.9)
724	1/4" TB	-C724-TB4	-C724-L-TB4	-C720-N	-C630-GT	2.5 (63.5)	1 3/8 (34.9)
	1/4" FR	-C724-FR4	-C724-L-FR4			3 (76.2)	1 3/8 (34.9)
	1/4" NPT	-C724-NS4	-C724-L-NS4			3 (76.2)	1 3/8 (34.9)
726	1/4" TB	-C726-TB4	-C726-L-TB4	-C720-N	-C630-GT	2.5 (63.5)	1 3/8 (34.9)
	1/4" FR	-C726-FR4	-C726-L-FR4			3 (76.2)	1 3/8 (34.9)
	1/4" NPT	-C726-NS4	-C726-L-NS4			3 (76.2)	1 3/8 (34.9)
728	1/4" TB	-C728-TB4	-C728-L-TB4	-C720-N	-C630-GT	2.5 (63.5)	1 3/8 (34.9)
	1/4" FR	-C728-FR4	-C728-L-FR4			3 (76.2)	1 3/8 (34.9)
	1/4" NPT	-C728-NS4	-C728-L-NS4			3 (76.2)	1 3/8 (34.9)


Note:

Nickel is standard material for gasket. If PCTFE is required, please add a suffix of "-k" to the ordering number.

Example: 6L-C638-TB4-K

Gaskets


NI-C630-GT / AL-C630-GT K-C630-GT

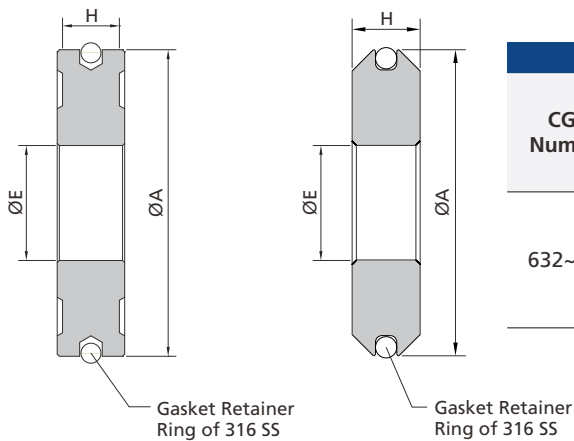


CGA Number	Gasket Ordering Number	Material	Dimensions					
			A		E		H	
			in.	mm	in.	mm	in.	mm
632~728	NI-C630-GT	Nickel 200	0.56	14.3	0.21	5.4	0.105	2.7
	K-C630-GT	PCTFE	0.56	14.3	0.21	5.4	0.125	3.2
	AL-C630-GT	Aluminum	0.56	14.3	0.21	5.4	0.105	2.7

Outlet Adaptors

Female NPT




Male Face Seal (FR)

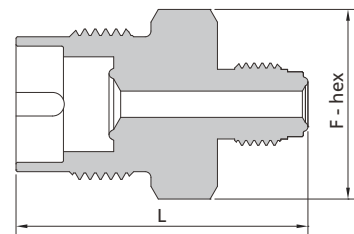

CGA Number	Basic Ordering Number	Dimensions, in. (mm)	
		L	F
632	-C632-A-FNS4	1.85 (47.0)	1 1/8 (28.6)
634	-C634-A-FNS4	1.85 (47.0)	1 1/8 (28.6)
636	-C636-A-FNS4	1.85 (47.0)	1 1/8 (28.6)
638	-C638-A-FNS4	1.85 (47.0)	1 1/8 (28.6)
640	-C640-A-FNS4	1.85 (47.0)	1 1/8 (28.6)
642	-C642-A-FNS4	1.85 (47.0)	1 1/8 (28.6)
712	-C712-A-FNS4	1.85 (47.0)	1 1/4 (31.8)
714	-C714-A-FNS4	1.85 (47.0)	1 1/4 (31.8)
716	-C716-A-FNS4	1.85 (47.0)	1 1/4 (31.8)
718	-C718-A-FNS4	1.85 (47.0)	1 1/4 (31.8)
720	-C720-A-FNS4	1.85 (47.0)	1 1/4 (31.8)
722	-C722-A-FNS4	1.85 (47.0)	1 1/4 (31.8)
724	-C724-A-FNS4	1.85 (47.0)	1 1/4 (31.8)
726	-C726-A-FNS4	1.85 (47.0)	1 1/4 (31.8)
728	-C728-A-FNS4	1.85 (47.0)	1 1/4 (31.8)


CGA Number	Basic Ordering Number	Dimensions, in. (mm)	
		L	F
632	-C632-A-FR4	2.0 (50.8)	1 1/8 (28.6)
634	-C634-A-FR4	2.0 (50.8)	1 1/8 (28.6)
636	-C636-A-FR4	2.0 (50.8)	1 1/8 (28.6)
638	-C638-A-FR4	2.0 (50.8)	1 1/8 (28.6)
640	-C640-A-FR4	2.0 (50.8)	1 1/8 (28.6)
642	-C642-A-FR4	2.0 (50.8)	1 1/8 (28.6)
712	-C712-A-FR4	2.0 (50.8)	1 1/4 (31.8)
714	-C714-A-FR4	2.0 (50.8)	1 1/4 (31.8)
716	-C716-A-FR4	2.0 (50.8)	1 1/4 (31.8)
718	-C718-A-FR4	2.0 (50.8)	1 1/4 (31.8)
720	-C720-A-FR4	2.0 (50.8)	1 1/4 (31.8)
722	-C722-A-FR4	2.0 (50.8)	1 1/4 (31.8)
724	-C724-A-FR4	2.0 (50.8)	1 1/4 (31.8)
726	-C726-A-FR4	2.0 (50.8)	1 1/4 (31.8)
728	-C728-A-FR4	2.0 (50.8)	1 1/4 (31.8)

Blank Plugs



CGA Number	Basic Ordering Number	Dimensions, in. (mm)	
		L	F
632	-C632-BP	1.53 (38.9)	1 1/8 (28.6)
634	-C634-BP	1.53 (38.9)	1 1/8 (28.6)
636	-C636-BP	1.53 (38.9)	1 1/8 (28.6)
638	-C638-BP	1.53 (38.9)	1 1/8 (28.6)
640	-C640-BP	1.53 (38.9)	1 1/8 (28.6)
642	-C642-BP	1.53 (38.9)	1 1/8 (28.6)
712	-C712-BP	1.53 (38.9)	1 1/4 (31.8)
714	-C714-BP	1.53 (38.9)	1 1/4 (31.8)
716	-C716-BP	1.53 (38.9)	1 1/4 (31.8)
718	-C718-BP	1.53 (38.9)	1 1/4 (31.8)
720	-C720-BP	1.53 (38.9)	1 1/4 (31.8)
722	-C722-BP	1.53 (38.9)	1 1/4 (31.8)
724	-C724-BP	1.53 (38.9)	1 1/4 (31.8)
726	-C726-BP	1.53 (38.9)	1 1/4 (31.8)
728	-C728-BP	1.53 (38.9)	1 1/4 (31.8)

Valve Outlet Caps (Including Chains, Rings and Gaskets)

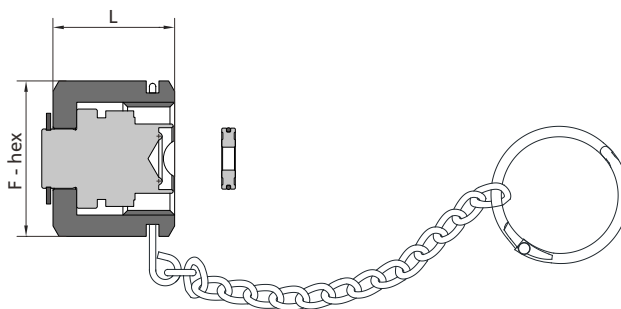

CGA Number	Basic Ordering Number	Dimensions, in. (mm)	
		L	F
632	-C632-CP	1.13 (28.7)	1 1/4 (31.8)
634	-C634-CP	1.13 (28.7)	1 1/4 (31.8)
636	-C636-CP	1.13 (28.7)	1 1/4 (31.8)
638	-C638-CP	1.13 (28.7)	1 1/4 (31.8)
640	-C640-CP	1.13 (28.7)	1 1/4 (31.8)
642	-C642-CP	1.13 (28.7)	1 1/4 (31.8)
712	-C712-CP	1.13 (28.7)	1 3/8 (34.9)
714	-C714-CP	1.13 (28.7)	1 3/8 (34.9)
716	-C716-CP	1.13 (28.7)	1 3/8 (34.9)
718	-C718-CP	1.13 (28.7)	1 3/8 (34.9)
720	-C720-CP	1.13 (28.7)	1 3/8 (34.9)
722	-C722-CP	1.13 (28.7)	1 3/8 (34.9)
724	-C724-CP	1.13 (28.7)	1 3/8 (34.9)
726	-C726-CP	1.13 (28.7)	1 3/8 (34.9)
728	-C728-CP	1.13 (28.7)	1 3/8 (34.9)

Note:


Nickel is standard material for gasket. If PCTFE is required, please add a suffix of "-k" to the ordering number.

Example: 6L-C632-CP-K


CGA Series

- ⦿ Designed and verified in compliance with the CGA V-1-2005 standard
- ⦿ For nipples with TB or FR connections, inner surface electropolished to an average of Ra 9 μin. (0.23 μm); Ra 32 μin. (0.8 μm) for nipples with NPT connections
- ⦿ With special cleaning and packaging, applicable to oxygen-enriched atmospheres
- ⦿ Maximum allowable leak rate: 1×10⁻⁹ std cm³/s
- ⦿ CGA series cylinder connections are available with a variety of end connection types, such as 1/4" TB, 3/8" TB, 1/2" TB, 1/8" NPT, 1/4" NPT, 3/8" NPT, 1/2" NPT, 1/4" FR, and 1/2" FR. The maximum working pressures for cylinder connections with these end connection types meet the requirements of the CGA V-1-2005 standard
- ⦿ Maximum working pressures for cylinder connections are calculated at room temperature in accordance with CGA V-1-2005, ASME B31.3, and ASME B31.1 standards
- ⦿ For other end connection types, please contact FITOK Group or our authorized distributors


Cylinder Connections (Including Nipples, Nuts and Gaskets)

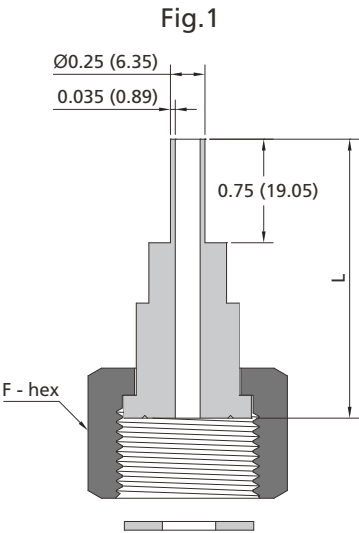

1/4" Butt Weld (TB)

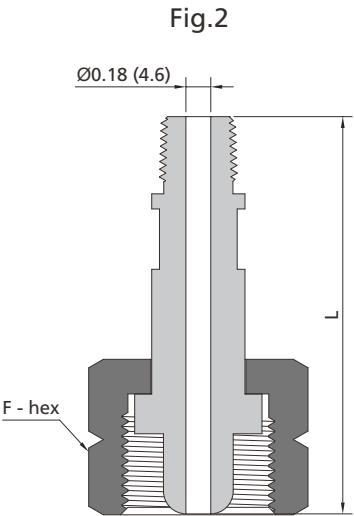

Male NPT

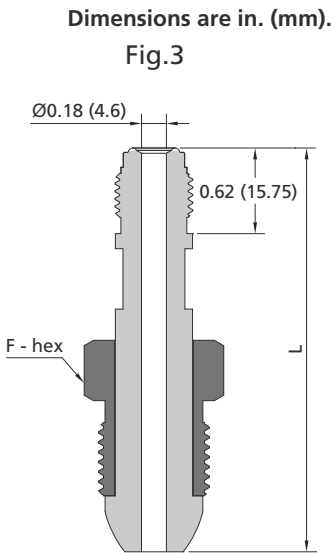

Male Face Seal (FR)

CGA Number	Ref. Fig.	End Connection	Assembly Basic Ordering Number	Nipple Basic Ordering Number	Nut Basic Ordering Number	Gasket Basic Ordering Number	Dimensions, in. (mm)	
							L	F
170	Fig.1	1/4" TB	-C170-TB4	-C170-L-TB4	-C170-N	-C170-GT	1.25 (31.8)	11/16 (17.5)
		1/8" NPT	-C170-NS2	-C170-L-NS2				
180	Fig.1	1/4" TB	-C180-TB4	-C180-L-TB4	-C180-N	-C180-GT	1.25 (31.8)	3/4 (19.1)
		1/8" NPT	-C180-NS2	-C180-L-NS2			1.75 (44.5)	
290	Fig.2	1/4" TB	-C290-TB4	-C290-L-TB4	-C290-N	—	2.63 (66.7)	1 (25.4)
		1/4" NPT	-C290-NS4	-C290-L-NS4			2.25 (57.2)	
296	Fig.3	1/4" TB	-C296-TB4	-C296-L-TB4	-C296-N	—	2.63 (66.7)	7/8 (22.3)
		1/4" NPT	-C296-NS4	-C296-L-NS4			3.5 (88.9)	
		1/4" FR	-C296-FR4	-C296-L-FR4			2.75 (69.9)	
320	Fig.1	1/4" TB	-C320-TB4	-C320-L-TB4	-C320-N	-C320-GT	1.75 (44.5)	1 1/8 (28.6)
		1/4" NPT	-C320-NS4	-C320-L-NS4			2.5 (63.5)	
		1/4" FR	-C320-FR4	-C320-L-FR4			1.75 (44.5)	


CGA Number	Ref. Fig.	End Connection	Assembly Basic Ordering Number	Nipple Basic Ordering Number	Nut Basic Ordering Number	Gasket Basic Ordering Number	Dimensions, in. (mm)	
							L	F
326	Fig.2	1/4" TB	-C326-TB4	-C326-L-TB4	-C326-N	—	2.25 (57.2)	1 1/8 (28.6)
		1/4" NPT	-C326-NS4	-C326-L-NS4			3.0 (76.2)	
		1/4" FR	-C326-FR4	-C326-L-FR4			2.25 (57.2)	
330	Fig.1	1/4" TB	-C330-TB4	-C320-L-TB4	-C330-N	-C320-GT	1.75 (44.5)	1 1/8 (28.6)
		1/4" NPT	-C330-NS4	-C320-L-NS4			2.5 (63.5)	
		1/4" FR	-C330-FR4	-C320-L-FR4			1.75 (44.5)	
346	Fig.2	1/4" TB	-C346-TB4	-C346-L-TB4	-C346-N	—	2.31 (58.7)	1 1/8 (28.6)
		1/4" NPT	-C346-NS4	-C346-L-NS4			3.0 (76.2)	
		1/4" FR	-C346-FR4	-C346-L-FR4			2.25 (57.2)	
350	Fig.2	1/4" TB	-C350-TB4	-C350-L-TB4	-C350-N	—	2.31 (58.7)	1 1/8 (28.6)
		1/4" NPT	-C350-NS4	-C350-L-NS4			3.0 (76.2)	
		1/4" FR	-C350-FR4	-C350-L-FR4			2.25 (57.2)	
510	Fig.3	1/4" TB	-C510-TB4	-C510-L-TB4	-C510-N	—	2.63 (66.7)	1 1/8 (28.6)
		1/4" NPT	-C510-NS4	-C510-L-NS4			3.5 (88.9)	
		1/4" FR	-C510-FR4	-C510-L-FR4			2.75 (69.9)	
540 ^①	Fig.2	1/4" TB	-C540-TB4	-C540-L-TB4	-C540-N	—	2.25 (57.2)	1 1/8 (28.6)
		1/4" NPT	-C540-NS4	-C540-L-NS4			3.0 (76.2)	
		1/4" FR	-C540-FR4	-C540-L-FR4			2.25 (57.2)	
580	Fig.3	1/4" TB	-C580-TB4	-C510-L-TB4	-C580-N	—	2.63 (66.7)	1 1/8 (28.6)
		1/4" NPT	-C580-NS4	-C510-L-NS4			3.5 (88.9)	
		1/4" FR	-C580-FR4	-C510-L-FR4			2.75 (69.9)	
590	Fig.3	1/4" TB	-C590-TB4	-C510-L-TB4	-C590-N	—	2.63 (66.7)	1 1/8 (28.6)
		1/4" NPT	-C590-NS4	-C510-L-NS4			3.5 (88.9)	
		1/4" FR	-C590-FR4	-C510-L-FR4			2.75 (69.9)	
660	Fig.1	1/4" TB	-C660-TB4	-C660-L-TB4	-C660-N	-C660-GT	2.19 (55.6)	1 1/4 (31.8)
		1/4" NPT	-C660-NS4	-C660-L-NS4			2.5 (63.5)	
		1/4" FR	-C660-FR4	-C660-L-FR4			1.88 (47.6)	
670	Fig.1	1/4" TB	-C670-TB4	-C660-L-TB4	-C670-N	-C660-GT	2.19 (55.6)	1 1/4 (31.8)
		1/4" NPT	-C670-NS4	-C660-L-NS4			2.5 (63.5)	
		1/4" FR	-C670-FR4	-C660-L-FR4			1.88 (47.6)	
678	Fig.1	1/4" TB	-C678-TB4	-C678-L-TB4	-C678-N	-C678-GT	2.5 (63.5)	1 1/4 (31.8)
		1/4" NPT	-C678-NS4	-C678-L-NS4			2.5 (63.5)	
		1/4" FR	-C678-FR4	-C678-L-FR4			2.0 (50.8)	
679	Fig.1	1/4" TB	-C679-TB4	-C679-L-TB4	-C679-N	-C679-GT	2.5 (63.5)	1 1/4 (31.8)
		1/4" NPT	-C679-NS4	-C679-L-NS4			3.0 (76.2)	
		1/4" FR	-C679-FR4	-C679-L-FR4			2.0 (50.8)	

Note: PTFE is standard material for gasket. If PCTFE is required, please add a suffix of "-k" to the ordering number.

Example: 6L-C170-FR4-K

① Cleaned and packaged for Oxygen Service.

Gaskets

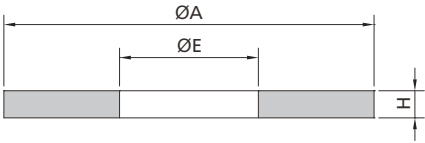


CGA Number	Gasket Basic Ordering Number	Dimensions					
		A		E		H	
		in.	mm	in.	mm	in.	mm
170	-C170-GT	0.43	11.0	0.19	4.8	0.10	2.5
180	-C180-GT	0.44	11.2	0.32	8.1	0.09	2.3
320, 330	-C320-GT	0.72	18.3	0.26	6.6	0.09	2.3
660, 670	-C660-GT	0.94	23.9	0.38	9.7	0.06	1.6
678	-C678-GT	0.61	15.5	0.30	7.6	0.06	1.6
679	-C679-GT	0.53	13.5	0.31	7.9	0.06	1.6

Outlet Adaptors, Blank Caps and Plugs


Blank Caps

CGA 580




Blank Plugs

CGA 350




Male Face Seal (FR)

CGA 350



Female NPT


CGA 590



CGA Number	End Connection	Assembly Basic Ordering Number	Dimensions, in. (mm)	
			L	F
180	1/4" Female NPT	-C180-A-FNS4	1.38 (35.0)	3/4 (19.1)
296	Blank Cap	-C296-BC	1.37 (34.8)	1 1/8 (28.6)
	1/4" Female NPT	-C296-A-FNS4	2.0 (50.8)	
	1/4" FR	-C296-A-FR4	2.0 (50.8)	
320	Blank Plug	-C320-BP	1.12 (28.4)	1 (25.4)
	1/4" Female NPT	-C320-A-FNS4	1.12 (28.4)	
	1/4" FR	-C320-A-FR4	1.74 (44.2)	
326	Blank Plug	-C326-BP	1.12 (28.4)	1 (25.4)
	1/4" Female NPT	-C326-A-FNS4	1.31 (33.3)	
	1/4" FR	-C326-A-FR4	1.74 (44.2)	
330	Blank Plug	-C330-BP	1.12 (28.4)	1 (25.4)
	1/4" Female NPT	-C330-A-FNS4	1.31 (33.3)	
	1/4" FR	-C330-A-FR4	1.74 (44.2)	
346	Blank Plug	-C346-BP	1.12 (28.4)	1 (25.4)
	1/4" Female NPT	-C346-A-FNS4	1.31 (33.3)	
	1/4" FR	-C346-A-FR4	1.88 (47.8)	
350	Blank Plug	-C350-BP	1.12 (28.4)	1 (25.4)
	1/4" Female NPT	-C350-A-FNS4	1.31 (33.3)	
	1/4" FR	-C350-A-FR4	1.88 (47.8)	
510	Blank Cap	-C510-BC	1.37 (34.8)	1 1/4 (31.8)
	1/4" Female NPT	-C510-A-FNS4	2.0 (50.8)	
	1/4" FR	-C510-A-FR4	2.0 (50.8)	
540 ^①	Blank Plug	-C540-BP	1.12 (28.4)	1 (25.4)
	1/4" Female NPT	-C540-A-FNS4	1.25 (31.8)	
	1/4" FR	-C540-A-FR4	1.87 (47.5)	
580	Blank Cap	-C580-BC	1.37 (34.8)	1 1/4 (31.8)
	1/4" Female NPT	-C580-A-FNS4	2.0 (50.8)	
	1/4" FR	-C580-A-FR4	2.0 (50.8)	


① Cleaned and packaged for Oxygen Service.

Female NPT
CGA 350




CGA Number	End Connection	Assembly Basic Ordering Number	Dimensions, in. (mm)	
			L	F
590	Blank Cap	-C590-BC	1.37 (34.8)	1 1/4 (31.8)
	1/4" Female NPT	-C590-A-FNS4	2.0 (50.8)	
	1/4" FR	-C590-A-FR4	2.0 (50.8)	
660	Blank Plug	-C660-BP	0.88 (22.4)	1 1/8 (28.6)
	1/4" Female NPT	-C660-A-FNS4	1.25 (31.8)	
	1/4" FR	-C660-A-FR4	1.5 (38.1)	
670	Blank Plug	-C670-BP	0.88 (22.4)	1 1/8 (28.6)
	1/4" Female NPT	-C670-A-FNS4	1.25 (31.8)	
	1/4" FR	-C670-A-FR4	1.5 (38.1)	
678	Blank Plug	-C678-BP	1.0 (25.4)	1 1/8 (28.6)
	1/4" Female NPT	-C678-A-FNS4	1.38 (35.1)	
	1/4" FR	-C678-A-FR4	1.5 (38.1)	
679	Blank Plug	-C679-BP	0.88 (22.4)	1 1/8 (28.6)
	1/4" Female NPT	-C679-A-FNS4	1.25 (31.8)	
	1/4" FR	-C679-A-FR4	1.75 (44.5)	

Cylinder Valve Outlet Plugs

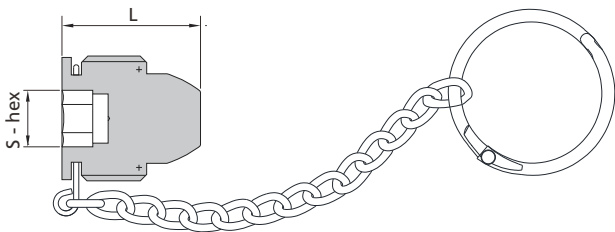

CGA Number	Basic Ordering Number	Dimensions, in. (mm)	
		L	S
510	-C510-PG	1.0 (25.4)	3/8 (9.5)
580	-C580-PG	1.0 (25.4)	
590	-C590-PG	1.0 (25.4)	

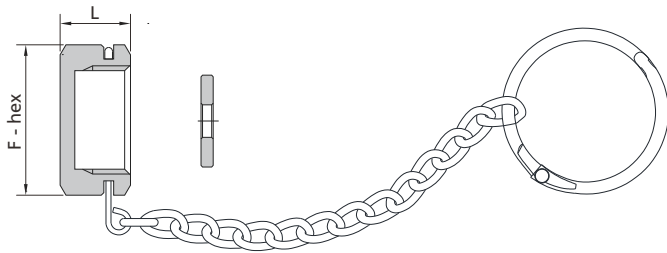

CGA Number	Basic Ordering Number	Dimensions, in. (mm)	
		L	F
320	-C320-CP	0.54 (13.7)	1 (25.4)
326	-C320-CP	0.54 (13.7)	
330	-C330-CP	0.54 (13.7)	
346	-C320-CP	0.54 (13.7)	
660	-C660-CP	0.54 (13.7)	1 1/4 (31.8)
670	-C670-CP	0.54 (13.7)	
678	-C670-CP	0.54 (13.7)	
679	-C670-CP	0.54 (13.7)	


Notes:

1. PTFE is standard material for gasket. If PCTFE is required, please add a suffix of "-k" to the ordering number.

Example: S4-C330-CP-K

2. The caps listed above are only intended to keep valve outlets clean and protect its threads. They shouldn't be used to contain pressure if the valve leaks or is opened by mistake.

CGA Number	Basic Ordering Number	Dimensions, in. (mm)	
		L	F
350	-C350-CP	0.82 (20.8)	1 1/8 (28.6)

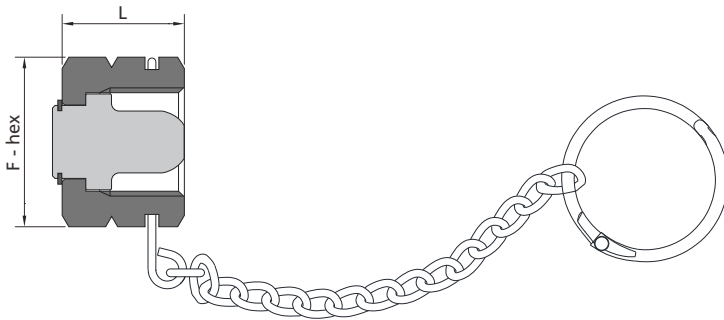

Complete Pigtail Connections (Including Nipples, Nuts, Gaskets and Blank Plugs or Caps)

Dimensions are in. (mm).

Fig.1

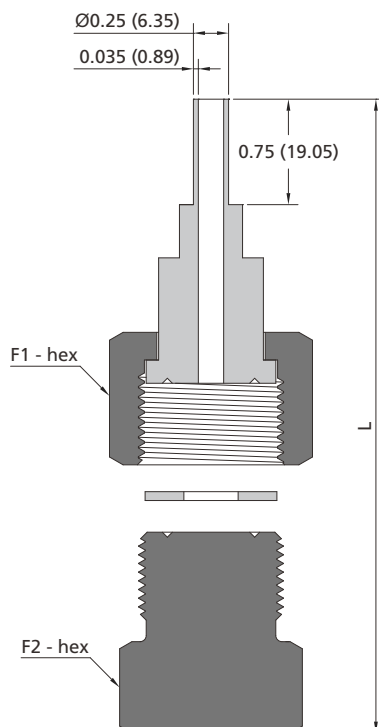
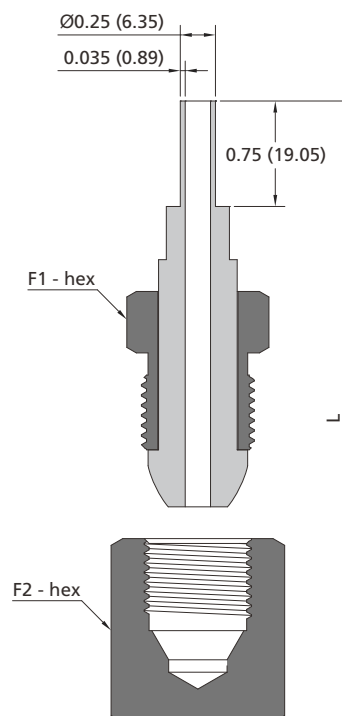


Fig.2


FITOK

CGA Number	Ref. Fig.	Assembly Basic Ordering Number	Gasket Basic Ordering Number	Dimensions, in. (mm)		
				L	F1	F2
296	Fig.2	-C296-TB4-A	—	3.03 (77.0)	7/8 (22.3)	1 1/8 (28.6)
320	Fig.1	-C320-TB4-A	-C320-GT	2.96 (75.2)	1 1/8 (28.6)	1 (25.4)
326	Fig.1	-C326-TB4-A	—	3.01 (76.5)		
330	Fig.1	-C330-TB4-A	-C320-GT	2.96 (75.2)		
346	Fig.1	-C346-TB4-A	—	2.97 (75.4)		
350	Fig.1	-C350-TB4-A	—	2.96 (75.2)		1 1/4 (31.8)
510	Fig.2	-C510-TB4-A	—	3.03 (77.0)		
540 ^①	Fig.1	-C540-TB4-A	—	2.96 (75.2)		1 (25.4)
580	Fig.2	-C580-TB4-A	—	3.03 (77.0)		1 1/4 (31.8)
590	Fig.2	-C590-TB4-A	—	3.03 (77.0)		
660	Fig.1	-C660-TB4-A	-C660-GT	2.96 (75.2)	1 1/4 (31.8)	1 1/8 (28.6)
670	Fig.1	-C670-TB4-A	-C660-GT	2.96 (75.2)		
678	Fig.1	-C678-TB4-A	-C678-GT	3.08 (78.2)		
679	Fig.1	-C679-TB4-A	-C679-GT	2.96 (75.2)		

Note:

PTFE is standard material for gasket. If PCTFE is required, please add a suffix of "-k" to the ordering number.

Example: 6L-C330-TB4-A-K

① Cleaned and packaged for Oxygen Service.

Assembly Torque For CGA Cylinder Connections


CGA NO.	Recommended Torque		CGA NO.	Recommended Torque	
	ft-lb	N·m		ft-lb	N·m
170 ^①	10~15	14~20	510	35~50	47~68
180 ^①	10~15	14~20	540	40~60	54~81
290	30~45	41~61	580	40~60	54~81
296	35~50	47~68	590	40~60	54~81
320 ^①	20~30	27~41	660 ^①	30~45	41~61
326	25~35	34~47	670 ^①	30~45	41~61
330 ^①	20~30	27~41	678 ^①	25~35	34~47
346	35~50	47~68	679 ^①	25~35	34~47
350	35~50	47~68			
CGA DISS NO.	Recommended Torque		Gasket Material		
	ft-lb	N·m			
632-728	35~40	47~53.8	Nickel		
	12~15	16~20.1	PCTFE		

① Gasket for seal: PTFE or PCTFE.

DIN Series

- Designed and verified in compliance with the DIN477-1 standard
- For nipples with TB or FR connections, inner surface electropolished to an average of Ra 9 $\mu\text{in.}$ (0.23 μm); Ra 32 $\mu\text{in.}$ (0.8 μm) for nipples with NPT connections
- With special cleaning and packaging, applicable to oxygen-enriched atmospheres
- Maximum allowable leak rate: 1×10^{-9} std cm^3/s
- DIN series cylinder connections are available with a variety of end connection types, such as 1/4" TB, 3/8" TB, 1/2" TB, 1/8" NPT, 1/4" NPT, 3/8" NPT, 1/2" NPT, 1/4" FR, and 1/2" FR. Please note that the maximum working pressures for cylinder connections with 3/8" TB and 1/2" TB end connections do not comply with the requirements of the DIN 477-1 standard. However, all other end connection types meet the standard's requirements.
Maximum working pressure for cylinder connection with 3/8" TB end connection is 3300 psig
Maximum working pressure for cylinder connection with 1/2" TB end connection is 3700 psig
- Maximum working pressures for cylinder connections are calculated at room temperature in accordance with DIN477-1, ASME B31.3, and ASME B31.1 standards
- For other end connection types, please contact FITOK Group or our authorized distributors

Complete Pigtail Connections (Including Nipples, Nuts, Gaskets and Blank Plugs)

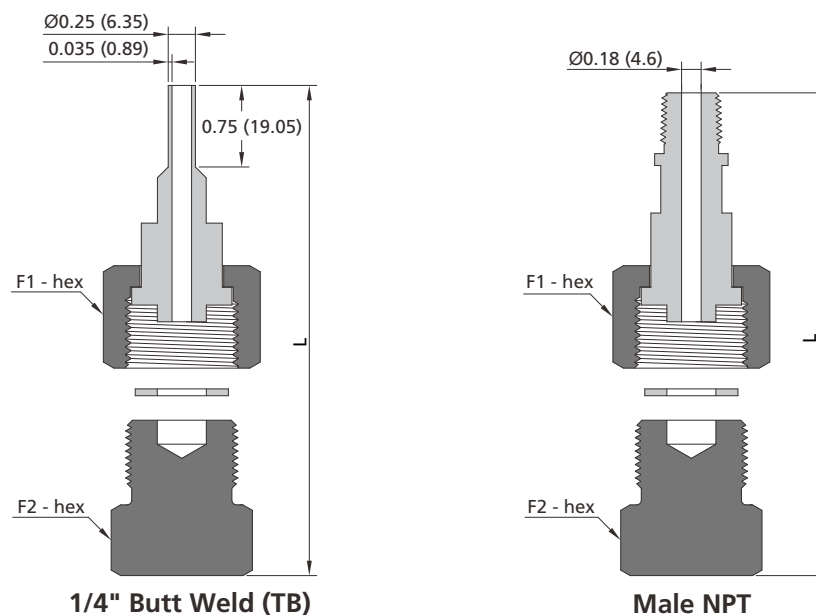

DIN Number	Assembly Basic Ordering Number	Gasket Basic Ordering Number	Dimensions, in.(mm)		
			L	F1	F2
1	-DIN1-TB4-A	-DIN1-GT	2.96 (75.2)	1 1/4 (31.8)	1 1/4 (31.8)
	-DIN1-NS4-A		4.25 (108)		
5	-DIN5-TB4-A	-DIN5-GT	3.09 (78.5)		
	-DIN5-NS4-A		4.41 (112)		
6	-DIN6-TB4-A	-DIN1-GT	2.96 (75.2)		
	-DIN6-NS4-A		4.25 (108)		
8	-DIN8-TB4-A	-DIN5-GT	3.09 (78.5)		
	-DIN8-NS4-A		4.41 (112)		
11	-DIN11-TB4-A	-DIN11-GT	2.88 (73.2)	7/8 (22.3)	11/16 (17.5)
	-DIN11-NS4-A		4.14 (105.2)		
14	-DIN14-TB4-A		2.88 (73.2)	1 1/16 (27.0)	7/8 (22.3)
	-DIN14-NS4-A		4.15 (105.5)		

Notes: 1. Above components can be ordered separately.

2. PTFE is standard material for gasket. If PCTFE is required, please add a suffix of "-k" to the ordering number.

Example: 6L-D1N1-TB4-A-K

Gas Connection Assignment Table^①

GAS	Formula	CGA DISS	CGA	DIN	JIS
Ammonia	NH ₃	720	705	DIN6	22-R
Argon	Ar	718	580	DIN6	22-R or 23-R
Arsenic Pentafluoride	AsF ₅	642	—	—	—
Arsine	AsH ₃	632	350	—	22-L
Boron Trichloride	BCl ₃	634	660	DIN8	—
Boron Trifluoride	BF ₃	642	330	DIN8	22-L
Carbon Dioxide	CO ₂	716	320	DIN6	—
Carbon Monoxide	CO	724	350	DIN5	22-L
Chlorine	Cl ₂	728	—	DIN8	26-R
Diborane	B ₂ H ₆	632	350	—	22-L
Dichlorosilane	SiH ₂ Cl ₂	636	678 ^②	DIN5	—
Diethylzinc	Zn(C ₂ H ₅) ₂	726	510 ^②	—	—
Diethyltelluride	(C ₂ H ₅) ₂ Te	726	—	—	—
Dimethylzinc	(CH ₃) ₂ Zn	726	—	—	—
Disilane	Si ₂ H ₆	632	—	—	—
Germane	GeH ₄	632	350 or 660	—	—
Halocarbon 11	CCl ₃ F	716	660	—	—
Halocarbon 115	CICF ₂ CF ₃	716	660	DIN6	—
Halocarbon 12	CCl ₂ F ₂	716	660	DIN6	—
Halocarbon 13	CICF ₃	716	660	DIN6	—
Halocarbon 14	CF ₄	716	320 or 580	DIN6	—
Halocarbon 23	CHF ₃	716	660	DIN6	—
Halocarbon 116	F ₃ CCF ₃	716	660	—	—
Helium	He	718	580	DIN6	22-R or 23-R
Hydrogen	H ₂	724	350	DIN1	22-L
Hydrogen Bromide	HBr	634	330	DIN8	26-R
Hydrogen Chloride	HCl	634	330	DIN8	26-R
Hydrogen Fluoride	HF	638	660 or 670	—	26-R
Hydrogen Sulfide	H ₂ S	722	330	DIN5	—
Krypton	Kr	718	580	DIN6	22-R or 23-R
Neon	Ne	718	580	DIN6	22-R or 23-R
Nitrogen	N ₂	718	580	DIN10	22-R or 23-R
Nitrogen Trifluoride	NF ₃	640	330 or 670	DIN8	—
Nitrous Oxide	N ₂ O	712	326	DIN8	—
Oxygen	O ₂	714	540	DIN9	22-R or 23-R
Perfluoropropane	CF ₂ (CF ₃) ₂	716	660	—	—
Phosphine	PH ₃	632	350 or 660	DIN1	—
Phosphorus Pentafluoride	PF ₅	642	330 or 660	—	—
Silane	SiH ₄	632	350	—	—
Silicon Tetrachloride	SiCl ₄	636	—	—	—
Silicon Tetrafluoride	SiF ₄	642	330	—	22-L
Sulphur Hexafluoride	SF ₆	716	590	DIN6	26-R
Trichlorosilane	SiHCl ₃	636	—	—	—
Triethylaluminum	(C ₂ H ₅) ₃ Al	726	510 ^②	—	—
Tungsten Hexafluoride	WF ₆	638	670	DIN8	—
Xenon	Xe	718	580	DIN6	22-R

① Consult CGA, DIN, JIS, or ISO organization specifications for information on working pressure.

② Information in this table is for reference only.

C

Technical References

Common Terms and Definitions	C-02
Gas Purity Values	C-03
How to Use the FITOK Flow Charts	C-04
Conversion Factors	C-05
Material Compatibility for Gases	C-06
Ordering Details for Specialty Gas Application	C-08

Common Terms and Definitions

Inlet Pressure

The pressure of media of gas or liquid on the inlet port of the regulator or valve;
Typical units of measure: psig, bar and MPa.

Outlet Pressure

The pressure of media of gas or liquid on the outlet port of the regulator or valve.

Accuracy

The variation in control pressure which occurs under steady state conditions within the control range of a regulator.

Sensitivity

The ability of a pressure regulator to respond to change in discharge conditions: pressure, flow, temperature, etc.

Flow Coefficient (Cv)

A flow coefficient is numerically equal to the number of U.S. Gallons of water at 60°F/16°C that will flow through a valve or regulator in one minute when the pressure differential between the inlet and outlet is 1 psi. When gas is used instead of liquid, the equation is modified to account for the use of a compressible fluid. For a regulator, Cv is determined when the regulator is wide open and not regulating. When determining flow performance use actual flow curves.

Leakage - External

The loss of fluid from the external surfaces or joints of a regulator or valve. Example: From the body-bonnet-diaphragm joint. Leakage to atmosphere. The leakage rate is measured in std cm³/s Helium.

Leakage - Internal

The loss of fluid through a regulator or valve, between pressure zones normally expected to be sealed. Example: Between the inlet pressure and the outlet pressure zones.

Load Element

One of the three basic elements of a pressure reducing regulator. It provides the means by which the operator can set the force that determines the control pressure of a regulator. This element includes the spring and the stem.

Sensing Element

One of the three basic elements of a pressure reducing regulator. It senses the changes of the outlet pressure and acts as a physical connection between the load element and control element.

Control Element

One of the three basic elements of a pressure regulator to reduce the high inlet pressure to a stable lower outlet pressure by adjusting the orifice.

Unbalanced Poppet

A poppet where the effective area of the poppet is influenced by the inlet pressure.

Balanced Poppet

A poppet where the effective area of the poppet is not influenced by the inlet pressure.

Gas Purity Values

Type	Degree	Purity Value	Max. Contamination (ppm)
Pure	2.5	99.5%	5000
	3.0	99.9%	1000
High Purity	3.5	99.95%	500
	4.0	99.99%	100
	4.5	99.995%	50
	5.0	99.999%	10
	5.5	99.9995%	5
	6.0	99.9999%	1.0
Ultra High Purity	7.0	99.99999%	0.1

How to Use the FITOK Flow Charts

A FITOK Flow Chart is a graphic representation of test results in curves, showing the changes in outlet pressure of a regulator with the varying flow rate basing on different inlet pressures. The regulator is so designed that at the time the outlet pressure reaches the set pressure, the flow rate would be zero. The inlet pressure is indicated on the right end of each curve.

To use the FITOK Flow Charts, the first step is to select the chart that fits the following:

- Regulator model
- Expected flow range
- Inlet pressure range
- Outlet pressure range

Subsequently, select a curve, if available, plotted for the exact inlet pressure and set pressure of the outlet (zero flow). Locate the set pressure on the vertical axis. Follow the curve until it crosses the vertical line corresponding to the desired flow rate. Read horizontally from the cross point to the vertical axis to locate the actual working pressure for this flow rate. If no curve is plotted for the exact pressure, extrapolate a new curve between and referring to the two closest existing curves.

Example:

Using the flow chart to determine the pressure drop (from the set pressure to the outlet pressure at 30 SCFM condition).

Given Conditions: Inlet pressure=3000 psig, Set pressure=2250 psig


Steps: 1. Locate the curve based on inlet pressure (3000 psig) and set outlet pressure (2250 psig)

2. Follow the curve until it crosses the vertical line corresponding to 30 SCFM;

3. Read horizontally from the cross point to the vertical axis. The corresponding pressure read is 1945 psig.

Therefore, the pressure drop is 305 psig.

Flow Chart

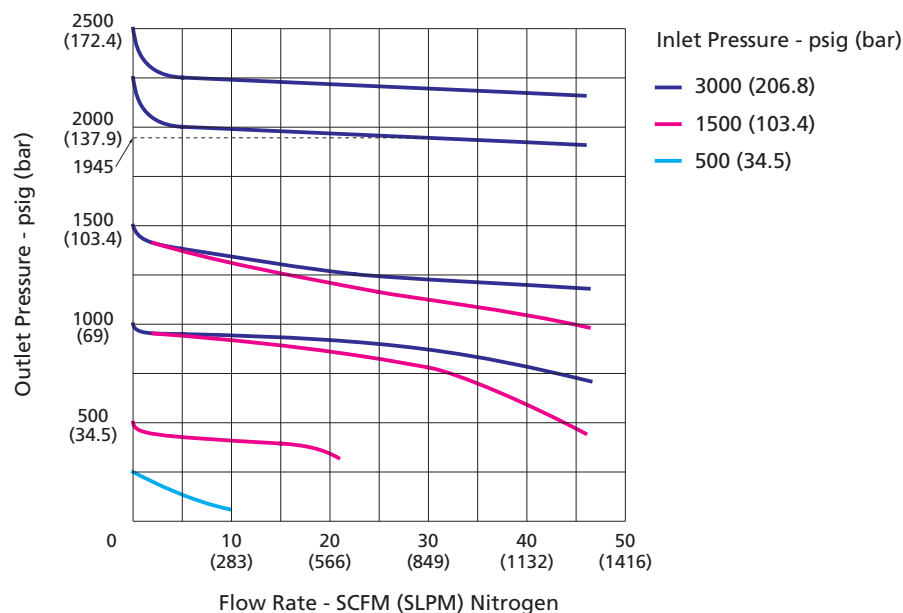

Notes:

1. The performance of regulator is more accurate in the range where the curve is comparatively flat.
2. All test results on the FITOK Flow Charts are based on utilization of nitrogen as a medium in standard testing conditions. Please contact FITOK for additional information.

Conversion Factors

Pressure

From \ To	psi	bar	atm	KPa	ft. of H ₂ O	in. of H ₂ O	mm of Hg	in. of Hg	Kg/cm ²
psi	1	0.068948	0.06805	6.89465	2.3089	27.708	51.175	2.036	0.070307
bar	14.5038	1	0.98692	100	33.4883	401.8596	750.062	29.53	1.0197
atm	14.696	1.01325	1	101.3171	33.932	407.1827	760	29.921	1.0332
KPa	0.14504	0.010	0.00987	1	0.33456	4.01472	7.5006	0.29613	0.0102
ft. of H ₂ O	0.433107	0.029891	0.02947	2.989	1	12	22.4198	0.882646	0.03048
in. of H ₂ O	0.03609	0.002499	0.00246	0.0249089	0.08333	1	1.86832	0.073556	0.00254
mm of Hg	0.019337	0.001333	0.00132	0.133322	0.044603	0.535240	1	0.03937	0.00136
in. of Hg	0.49115	0.033864	0.03342	3.376895	1.134	13.6	25.4	1	0.034532
Kg/cm ²	14.22334	0.980665	0.9678	98.03922	32.8084	393.7008	735.5592	28.95903	1

Flow

From \ To	cm ³ /min	cm ³ /sec	ft ³ /hr	ft ³ /min	m ³ /hr	m ³ /min	L/hr	L/min
cm ³ /min	1	0.0166667	0.0021189	0.0000353	0.00006	0.000001	0.06	0.001
cm ³ /sec	60	1	0.127134	0.0021189	0.0036	0.00006	3.6	0.06
ft ³ /hr	471.9474	7.86579	1	0.0166667	0.0283168	0.0004719	28.31685	0.4719474
ft ³ /min	28316.85	471.9474	60	1	1.699008	0.0283168	1699.008	28.31686
m ³ /hr	16666.67	277.7778	35.31467	0.5885777	1	0.0166667	1000	16.66667
m ³ /min	1000000	16666.67	2118.876	35.31467	60	1	60000	1000
L/hr	16.66667	0.2777778	0.0353147	0.0005885	0.001	0.0000167	1	0.0166667
L/min	1000	16.66667	2.118876	0.0353147	0.06	0.001	60	1

Density

From \ To	gms/cm ³	kg/m ³	lbs/ft ³	lbs/in ³	lbs/U.S. gal
gms/cm ³	1	1000	62.428	0.0361273	8.3454
kg/m ³	0.001	1	0.062428	3.61273×10 ⁻⁵	0.0083454
lbs/ft ³	0.0160185	16.018463	1	5.78704×10 ⁻⁴	0.13368
lbs/in ³	27.679905	27679.9	1728	1	231
lbs/U.S. gal	0.1198264	119.8264	7.4805195	0.004329	1

Material Compatibility for Gases

Codes

- 1 Recommended
- 2 Use with Limitations
- 3 Not Applicable
- 4 Insufficient Data

Material Media	Metals						Plastics				Elastomers		
	Copper	Brass	Aluminum	SS	Hastelloy C 22	Monel	PCTFE	Teflon PTFE	PEEK	Polyimide	FKM	Buna-N	EPDM
Acetylene	3	2	1	1	1	1	1	1	4	4	1	1	1
Ammonia	3	3	2	1	1	1	1	1	4	3	3	2	1
Argon	1	1	1	1	1	1	1	1	1	1	1	1	1
Argon/Methane	1	1	1	1	1	1	1	1	1	1	1	1	3
Arsine	3	2	3	1	1	1	1	1	4	4	1	4	1
Boron Trichloride	3	3	3	2	1	1	1	1	4	4	4	3	4
Boron Trifluoride	3	3	3	2	1	1	1	1	4	4	4	3	4
N-Butane	1	1	1	1	1	1	1	1	1	1	1	1	4
Carbon Dioxide	1	1	1	1	1	1	1	1	1	1	1	1	1
Carbon Monoxide	1	1	1	1	1	1	1	1	4	4	1	1	1
Chlorine	3	3	3	2	1	1	1	1	4	2	1	3	1
Deuterium	1	1	1	1	1	1	1	1	1	1	1	1	4
Diborane	1	1	1	1	1	1	1	1	1	1	1	3	4
Ethane	1	1	1	1	1	1	1	1	1	1	1	1	3
Ethylene	1	1	1	1	1	1	1	1	1	1	1	1	3
Fluorine	2	3	2	2	2	1	2	1	3	3	3	3	3
Hydrogen	1	1	1	1	1	1	1	1	1	1	1	1	1
Hydrogen Chloride	3	3	3	2	1	1	1	1	4	2	2	3	1
Hydrogen Flouride	3	3	3	3	2	1	1	1	4	4	4	3	1
Hydrogen Sulphide	3	3	3	1	1	4	4	4	4	4	1	4	1
Hydrogen Iodide	3	3	3	4	4	4	4	4	4	4	4	4	4
Helium	1	1	1	1	1	1	1	1	1	1	1	1	1
Hexafluoro Ethane	1	1	1	1	1	1	2	1	4	4	4	4	4

Material Media	Metals						Plastics				Elastomers		
	Copper	Brass	Aluminum	SS	Hastelloy C 22	Monel	PCTFE	Teflon PTFE	PEEK	Polyimide	FKM	Buna-N	EPDM
Isobutene	1	1	1	1	1	1	1	1	1	1	1	1	3
Isobutane	1	1	1	1	1	1	1	1	1	1	1	1	3
Krypton	1	1	1	1	1	1	1	1	1	1	1	1	4
Methane	1	1	1	1	1	1	1	1	1	1	1	1	3
Methyl Chloride	4	4	3	1	1	4	4	1	4	4	1	3	3
Methyl Mercaptan	3	2	1	1	4	4	1	1	4	4	4	4	4
Neon	1	1	1	1	1	1	1	1	1	1	1	1	1
Nitrogen	1	1	1	1	1	1	1	1	1	1	1	1	1
Nitrous Oxide	1	1	1	1	1	1	2	1	1	1	1	1	4
Nitrogen Dioxide	4	2	2	1	4	2	1	1	4	4	4	4	4
Nitrogen Trifluoride	2	4	4	2	4	1	4	4	4	4	4	4	4
Nitrogen Monoxide	3	3	1	1	1	3	1	1	4	4	4	4	4
Phosphine	2	1	2	1	1	1	1	1	4	4	2	4	1
Propane	1	1	1	1	1	1	1	1	1	1	1	1	3
Propylene	1	1	1	1	1	1	1	1	1	1	1	3	3
Oxygen	1	1	1	1	1	1	1	1	1	1	1	1	1
Sulphur Dioxide	2	2	2	1	1	4	1	1	4	4	3	3	1
Sulphur Hexafluoride	1	1	1	1	1	1	1	1	1	1	1	1	1
Silane	1	1	1	1	1	1	1	1	4	4	1	4	4
Synthetic Air	1	1	1	1	1	1	1	1	1	1	1	1	1
Tetrafluoro Methane	1	1	1	1	1	1	1	1	4	4	1	4	4
Trifluoro Methane R23	1	1	1	1	1	1	1	1	4	4	4	4	4
Xenon	1	1	1	1	1	1	1	1	1	1	1	1	1

Ordering Details for Specialty Gas Application

Company _____		
Name _____		
Tel _____		
E-mail _____		
Application Information		
Gas _____	Chemical formula _____	Purity _____
Upstream pressure _____ psig, _____ bar, _____ Mpa		
Downstream pressure range _____ psig, _____ bar, _____ Mpa		
Temperature _____ °C _____ °F		Cv or flow rate _____
Application _____		

Pressure Regulator Data		
Single-stage <input type="checkbox"/> Dual-stage <input type="checkbox"/>		
Material (mostly gas type dependent): Stainless Steel <input type="checkbox"/> Brass <input type="checkbox"/> Hastelloy <input type="checkbox"/>		
<input checked="" type="radio"/> Cylinder pressure regulator <input type="checkbox"/> Cylinder connection Yes <input type="checkbox"/> No <input type="checkbox"/> Purge unit Yes <input type="checkbox"/> No <input type="checkbox"/> <input checked="" type="radio"/> Panel and line pressure regulator <input type="checkbox"/> 2 ports <input type="checkbox"/> 3 ports <input type="checkbox"/> 4 ports <input type="checkbox"/> <input checked="" type="radio"/> Pressure control panel <input type="checkbox"/> Purge unit Yes <input type="checkbox"/> No <input type="checkbox"/> <input checked="" type="radio"/> Changeover system <input type="checkbox"/> With line regulator Yes <input type="checkbox"/> No <input type="checkbox"/> <input checked="" type="radio"/> Point-of-use panel <input type="checkbox"/>		

Warranty Information

FITOK products are backed by The FITOK Limited Lifetime Warranty. For a copy, contact FITOK Group or our authorized distributors.

